
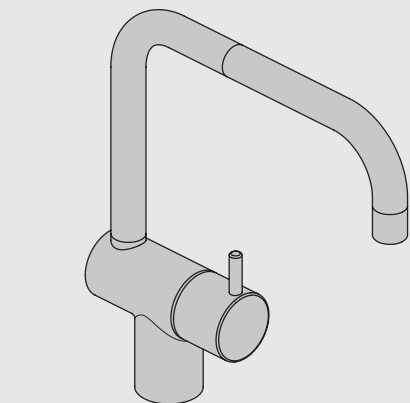


Fitting instruction
Montageanleitung
Monteringsvejledning
Monteringsvågledning
Montage hanleiding
Manuel de montage

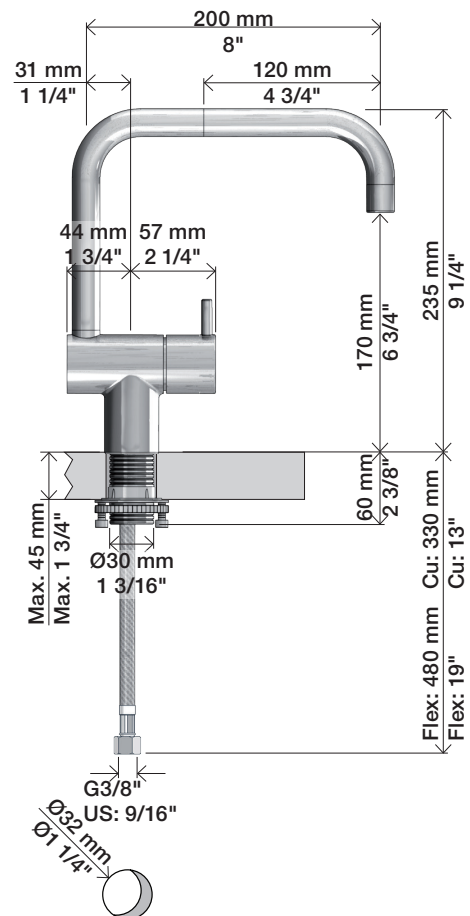

voilà

 Max. 65°C, 150°F

1

2


3

VR260


Ø45 mm
Ø1 3/4"
> Ø32 mm
> Ø1 1/2"

4 mm

4

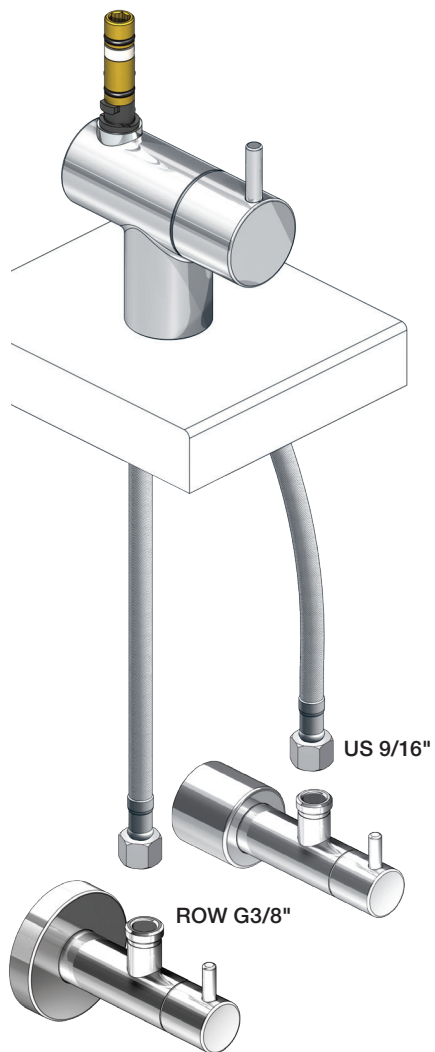


5

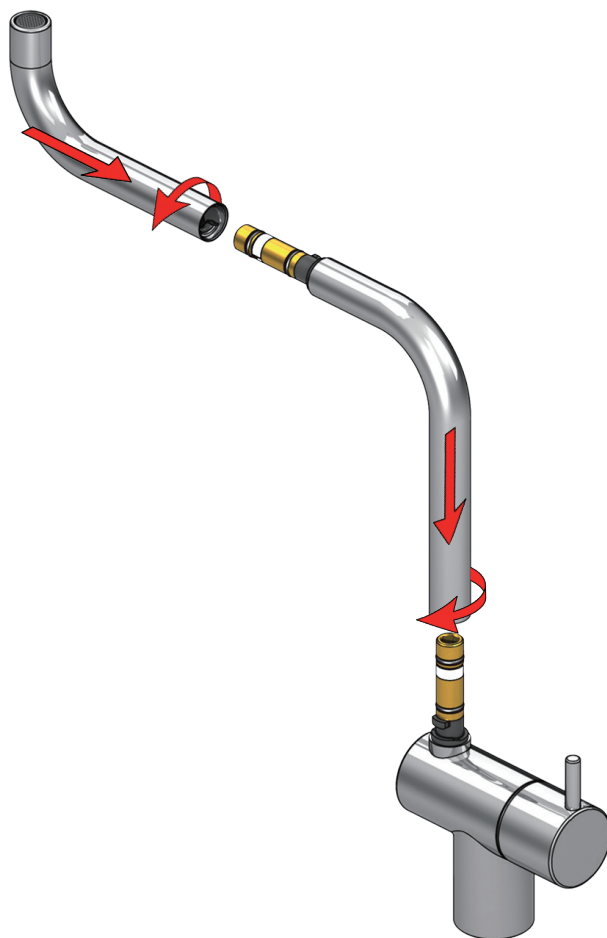


Operation
Bedienung
Betjening

Bruk
Bediening
Fonctionnement

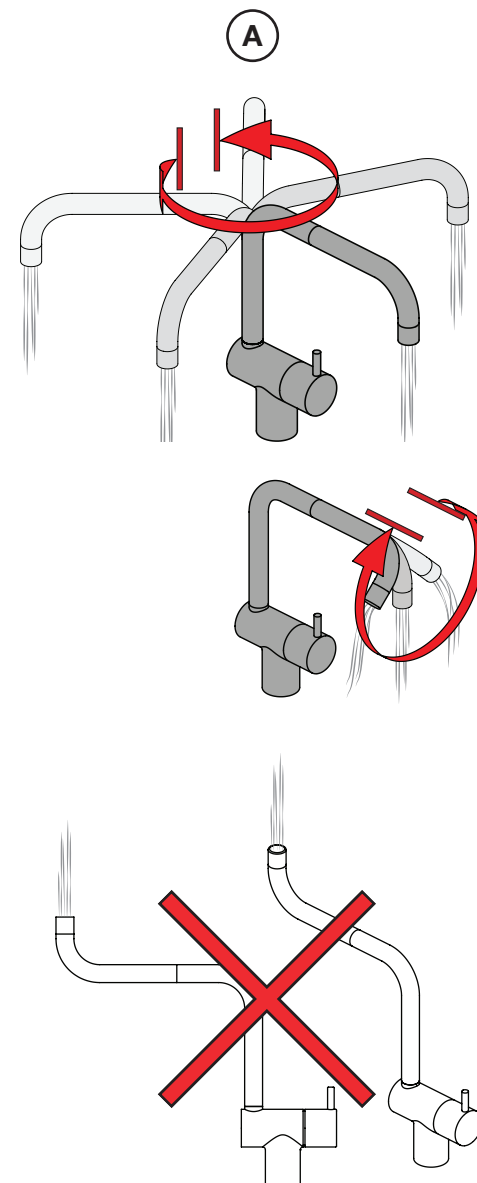


Colour: paint + 16, 19, 20, 230

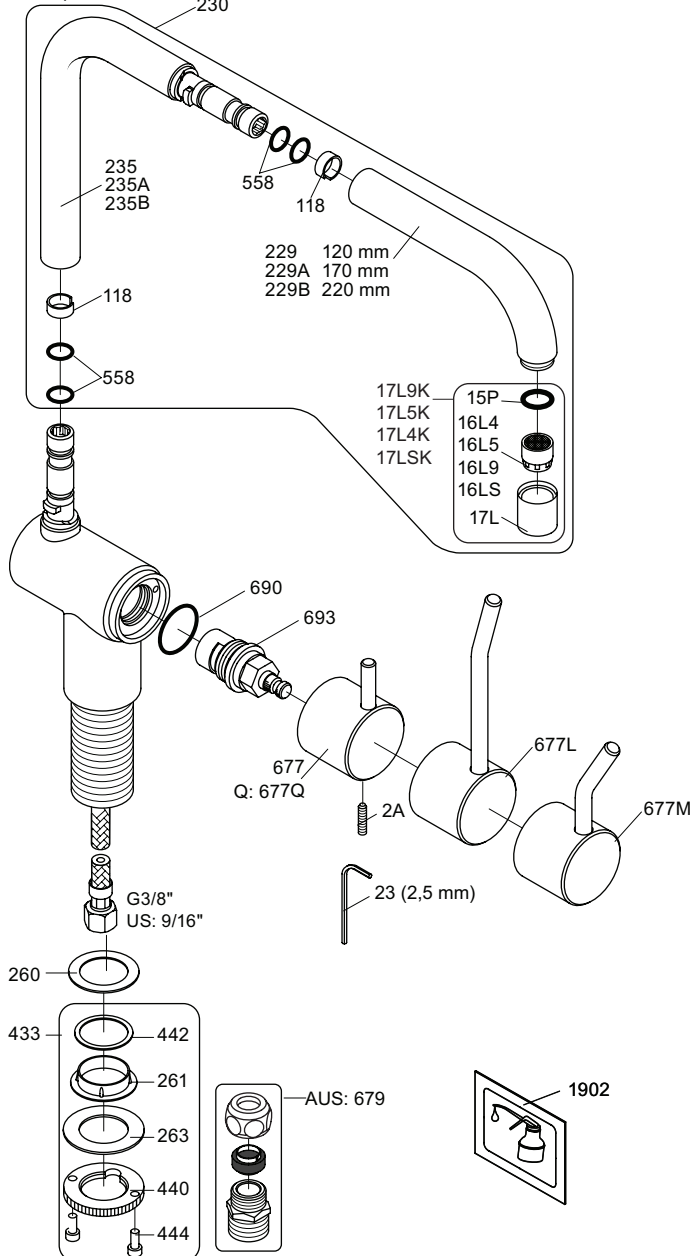


Cu:
KV8: Ø10
KV8US: Ø3/8\"/>


30 Colour: 40 (1999 -)

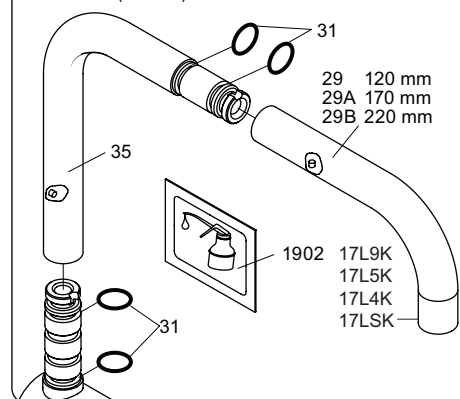


133 VR133 - Colour: paint + 16 & 20 (1997 - 2012)

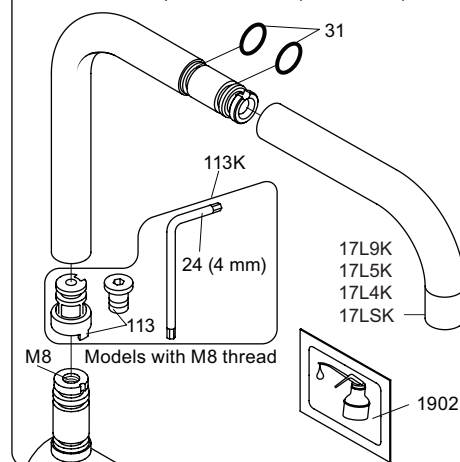

VR132 - Colour: paint + 16 & 20 (2013 - 06. 2016)

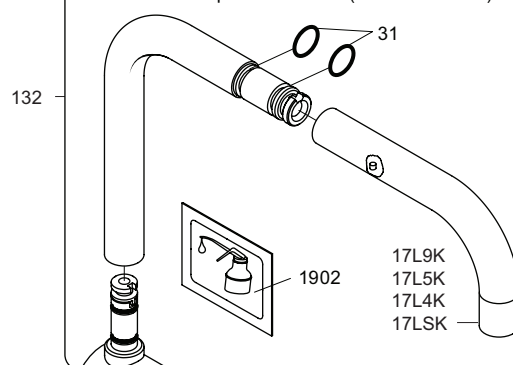

NR.7/L/M: VR2A, VR677/L/M
VR17L4K: VR15P, VR16L4, VR17L (US Standard)
VR17L5K: VR15P, VR16L5, VR17L
VR17L9K: VR15P, VR16L9, VR17L
VR17LSK: VR15P, VR16LS, VR17L
VR30: VR15P, VR16L9, VR17L, VR29, 4xVR31, VR35, VR1902 (F40) (and KV8 from 1972 - 1996)
VR132: VR15P, VR16L9, VR17L, 2xVR31, VR1902 (2013 - 06. 2016)
VR133: VR15P, VR16L9, VR17L, VR24, 2xVR31, VR113, VR1902 (1997 - 2012)
VR230: VR15P, VR16L9, VR17L, 2xVR118, VR229, VR235, 4xVR558, VR1902 (06-2016 -)
VR438: VR96, VR98, 2xVR444, VR450, VR451
VR693K: VR23, VR693



vola

Lunavej 2
DK-8700 Horsens
Tlf : + 45 7023 5500
sales@vola.com
www.vola.com

VOLA KV8

Date

Jan. 23

Rev.

10

Sheet

SB25.1