

Date:

Client:

Project:

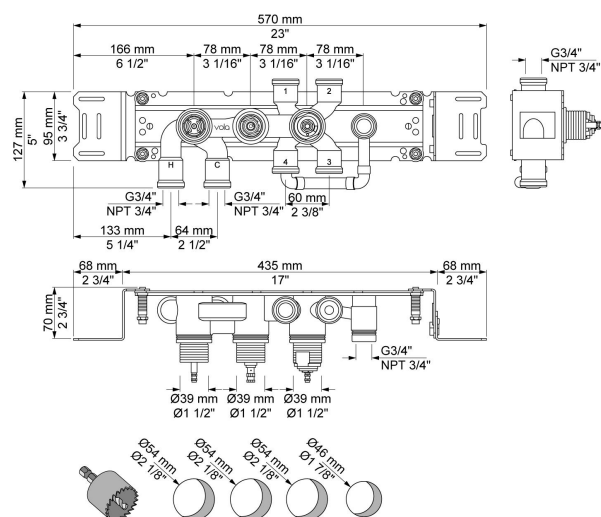


5400NA4


Thermostatic mixer with 4-way diverter, one premounted outlet socket and 3 separate outlet sockets, 200M. 3/4" connection to copper, steel, iron or pex pipe Work.

Flow

	Bar:	1.0	2.0	3.0	4.0	5.0
Outlet 1	(l/min)	18.5	26.1	32.0	37.0	41.3
Outlet 2	(l/min)	18.5	26.1	32.0	37.0	41.3
Outlet 3	(l/min)	18.5	26.1	32.0	37.0	41.3
Outlet 4	(l/min)	18.5	26.1	32.0	37.0	41.3
Cal Outlet 1	(l/min)	4.4	6.2	7.6	7.6	7.6
Cal Outlet 2	(l/min)	4.4	6.2	7.6	7.6	7.6
Cal Outlet 3	(l/min)	4.4	6.2	7.6	7.6	7.6
Cal Outlet 4	(l/min)	4.4	6.2	7.6	7.6	7.6

**Available in colors**

	Color 64, Brushed Copper
Color 60, Black	Color 65, Gold
Color 61, Brushed black	Color 68, Silver
Color 63, Copper	Color 70, Brushed Gold

**200M**

Separate outlet socket.

1/2" connection to copper, steel, iron or pex pipe work.

