
VOLA 5471S-061 1/6

Date:

Client:

Project:



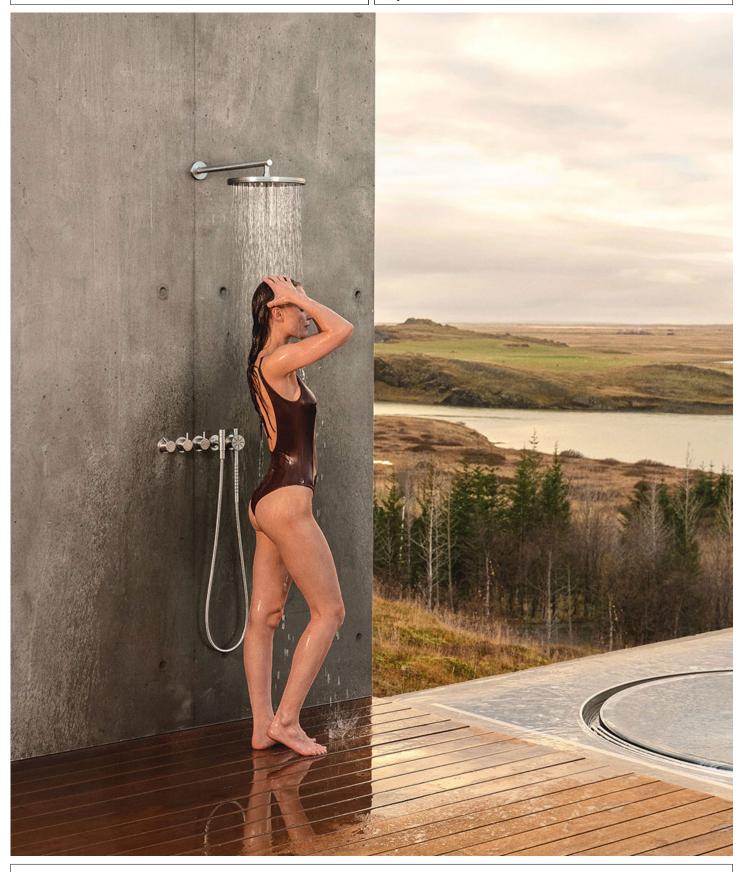







VOLA 5471S-061 2/6


5471S-061

³/₄" thermostatic mixer.5471S-061UP = Thermostatic mixer 5400NV, 200M.5471S-061AP = Handle NR51, handle NR52, handle NR64G, hand shower and hand shower holder with non-return valve 070S, hose 1500 mm, wall-mounted head shower 060, 60 mm circular flanges 001, 001G, 3

Flow

	Bar:	1.0	2.0	3.0	4.0	5.0
060 ¹⁾	(l/min)	12.7	18.0	22.0	25.4	28.4
070S ²⁾	(l/min)	6.9	9.8	12.0	13.9	15.5

¹⁾ USA: Flow restricted to 1.8 gpm (7.0 l/min) ²⁾ USA: Flow restricted to 2 gpm (7.6 l/min)

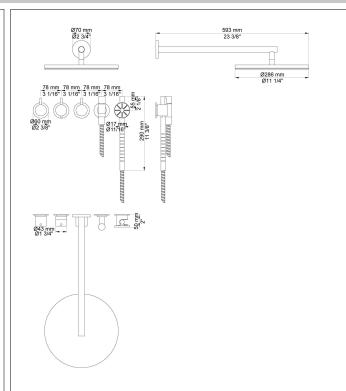


Available in colors

Color 20, Brushed chrome					
Color 21, Carmine red					
Color 25, Pink					
Color 27, Matt black					
Color 28, Matt white					
Color 40, Brushed stainless steel					
Color 60, Black					
Color 61, Brushed black					
Color 63, Copper					
Color 64, Brushed Copper					
Color 65, Gold					
Color 68, Silver					
Color 70, Brushed Gold					

VOLA 5471S-061 3/6




001 60 mm circular flange. Hole Ø30 mm.






001G 60 mm circular flange. Hole Ø33 mm.






060 Head shower, round, wall-mounted.

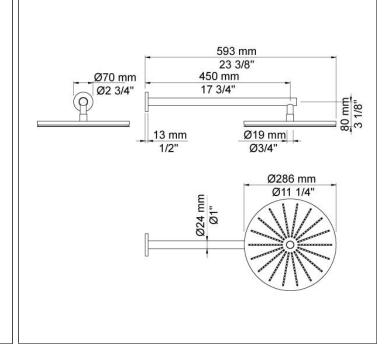

VOLA 5471S-061 4/6




070SHand shower, hand shower holder and hose with non-return valve.






2001 60 mm circular flange. Hole Ø39 mm.





200MSeparate outlet socket. ½" connection to copper, steel, iron or pex pipe work.

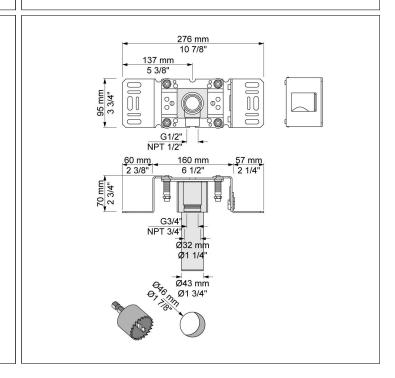


VOLA 5471S-061 5/6



5400NV


Thermostatic mixer with diverter and one fixed outlet socket.3/4" connection to copper, steel, iron or pex pipe work.

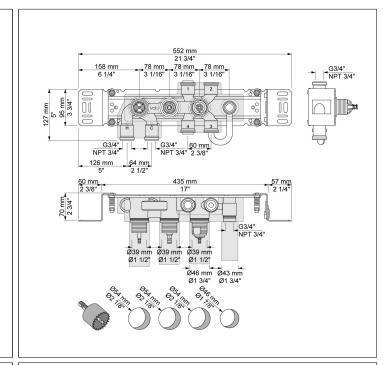






On/off handle for series 5000.

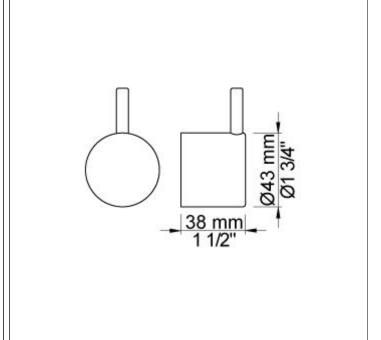



NR52

Thermostatic handle for series 5000.

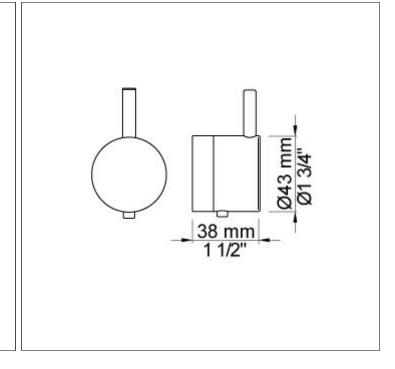

VOLA 5471S-061 6/6



NR64G

Diverter handle for 5400/5600. With peg in the same colour as handle (Standard).

