

Date:

Client:

Project:



COMBI-11

Thermostatic mixer with 3-way diverter. Combi-11UP = Thermostatic mixer 5400FVA3, 5 pcs. 200M. Combi-11AP = Handle NR51, handle NR52, handle NR64G, hand shower and hand shower holder with non-return valve 070, hose 1500 mm, ceiling mounted head shower 050A, 4 pcs. 050K, 60 mm circular flange 001, 3 pcs. 2001.

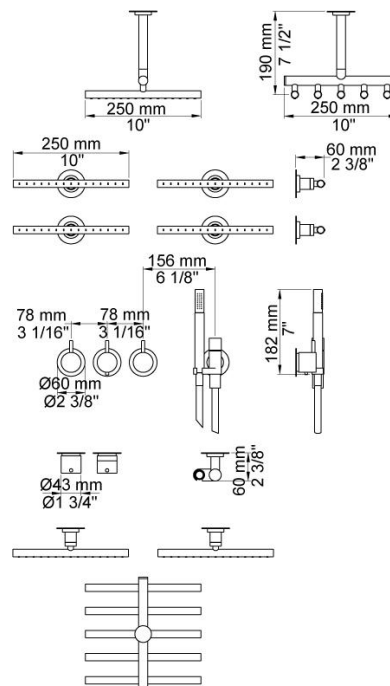
Flow

	Bar:	1.0	2.0	3.0	4.0	5.0
050A ¹⁾	(l/min)	13.3	18.8	23.0	26.6	29.7
050K ²⁾	(l/min)	2.9	4.1	5.0	5.0	5.0
070 ³⁾	(l/min)	5.2	7.3	9.0	9.0	9.0

¹⁾ Outlet 1 (Cal-Green flow max 2gpm)

²⁾ Outlet 2 (Cal-Green flow max 2gpm)

³⁾ Outlet 3 (Cal-Green flow max 2gpm)

**Available in colors**

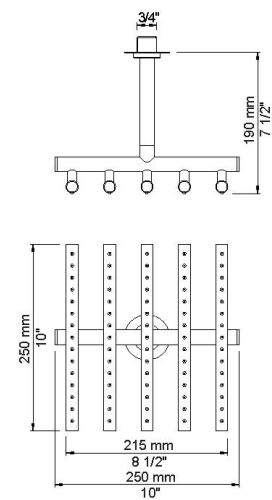
	Color 20, Brushed chrome
Color 02, Grey	Color 21, Carmine red
Color 04, Light blue	Color 25, Pink
Color 05, Orange	Color 27, Matt black
Color 06, Light green	Color 28, Matt white
Color 08, Yellow	Color 40, Brushed stainless steel
Color 09, Dark grey	Color 60, Black
Color 12, Mocca	Color 61, Brushed black
Color 14, Bright red	Color 63, Copper
Color 15, Dark blue	Color 64, Brushed Copper
Color 16, Polished chrome	Color 65, Gold
Color 17, Gloss black	Color 68, Silver
Color 18, White	Color 70, Brushed Gold
Color 19, Natural brass	

**001**

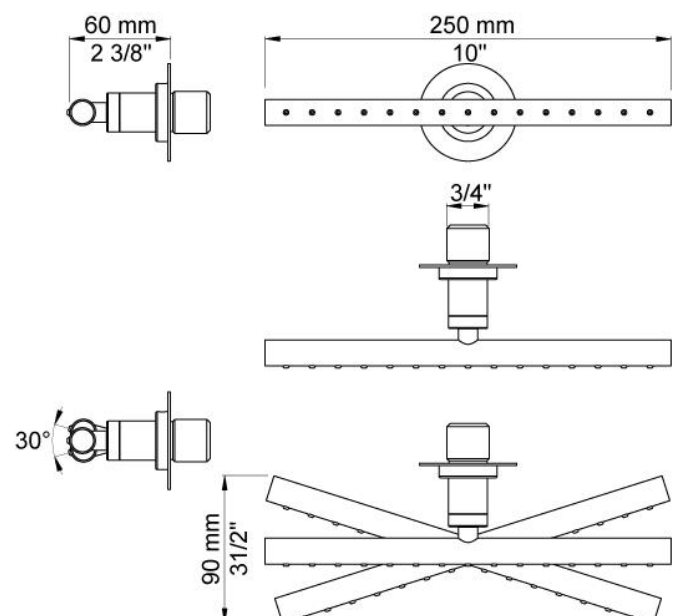
60 mm circular flange. Hole Ø30 mm.

**050A**

Head shower, ceiling mounted.



**050K**

Adjustable body jet.


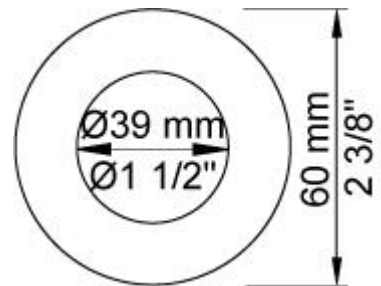


**070**

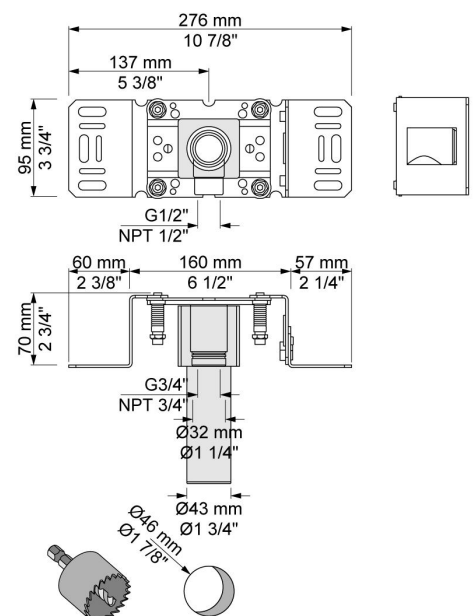
Hand shower, hand shower holder and hose with non-return valve.

**2001**

60 mm circular flange. Hole Ø39 mm.

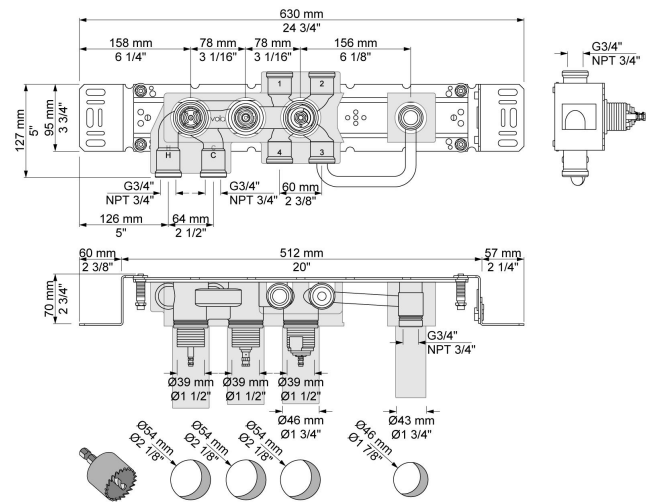
**200M**

Separate outlet socket.
1/2" connection to copper, steel, iron or pex pipe work.

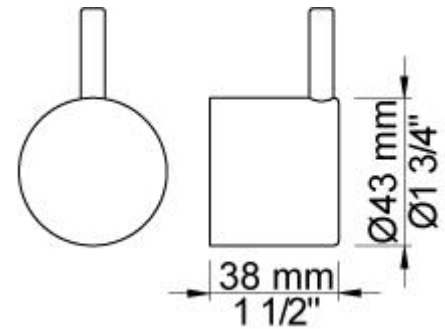


**5400FVA3**

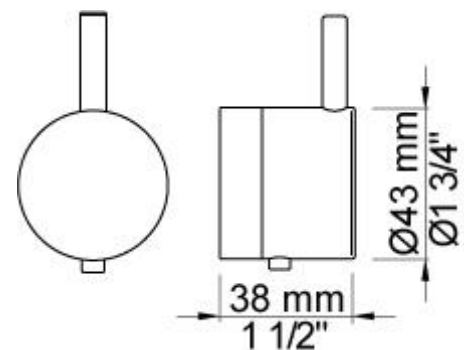
Thermostatic mixer with 3-way diverter, one premounted outlet socket.
 $\frac{3}{4}$ " connection to copper, steel, iron or pex pipe work.

**NR51**

On/off handle for series 5000.

**NR52**

Thermostatic handle for series 5000.



**NR64G**

Diverter handle for 5400/5600. With peg in the same colour as handle (Standard).

