

ORDER FORM


(Firm order cannot be cancelled or returned)

VOLA A/S
Lunavej 2
8700 Horsens
Tlf. 7023 5500
sales@vola.dk
www.vola.com

VOLA T39ELUS (120V)

1. Select number of bars (mark)
2. Choose center distance (100 - 300 mm)
3. Thickness of tiles
4. Select finish

Basic built-in part: Operating handle + 3 bars.
(Flexible center distance)

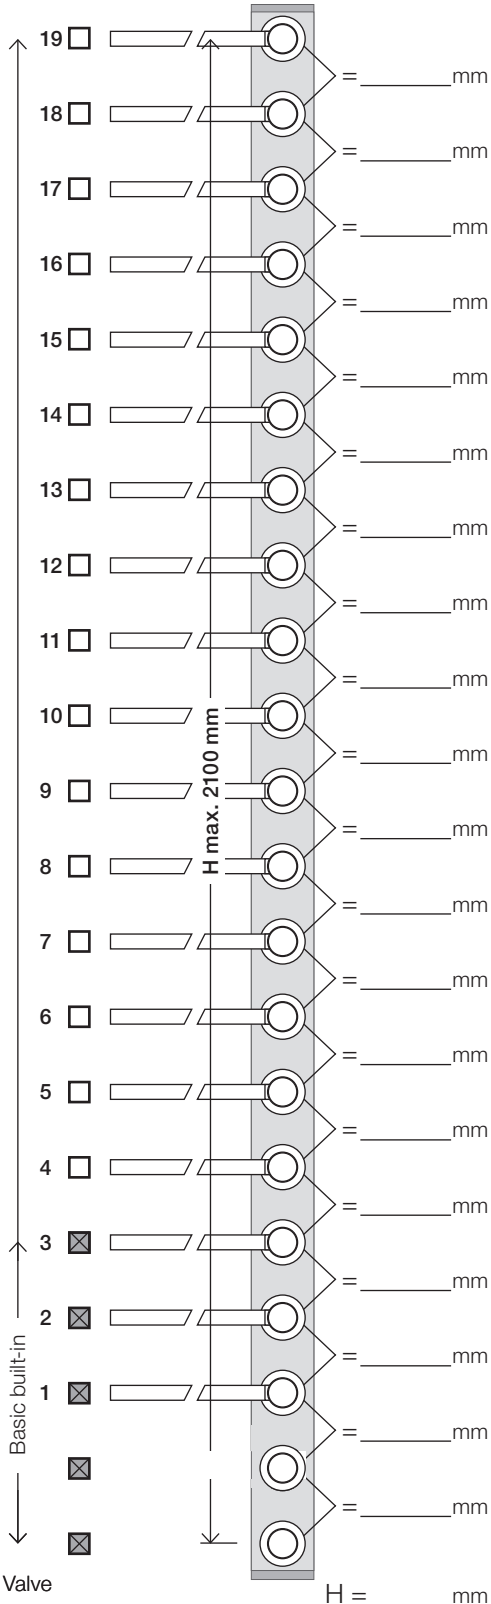

Order number: _____

Name of customer: _____

Address: _____

Post code: _____

Tel.: _____

E-mail: _____

Sales person/vendor: _____

Depth of wall covering/Tiles:

15 - 25 mm (std)
 25 - 35 mm (+10)
 35 - 45 mm (+20)
 45 - 55 mm (+30)
 55 - 65 mm (+40)
 65 - 75 mm (+50)

Finish:

<input type="checkbox"/> 02 Grey	<input type="checkbox"/> 21 Carmine red
<input type="checkbox"/> 04 Light blue	<input type="checkbox"/> 25 Pink
<input type="checkbox"/> 05 Orange	<input type="checkbox"/> 27 Matt black
<input type="checkbox"/> 06 Light green	<input type="checkbox"/> 28 Matt white
<input type="checkbox"/> 08 Yellow	<input type="checkbox"/> 40 Brushed stainless steel
<input type="checkbox"/> 09 Dark grey	<input type="checkbox"/> 60 Black
<input type="checkbox"/> 12 Mocca	<input type="checkbox"/> 61 Brushed black
<input type="checkbox"/> 14 Bright red	<input type="checkbox"/> 62 Deep black
<input type="checkbox"/> 15 Dark blue	<input type="checkbox"/> 63 Copper
<input type="checkbox"/> 16 Polished chrome	<input type="checkbox"/> 64 Brushed copper
<input type="checkbox"/> 17 Gloss black	<input type="checkbox"/> 65 Gold
<input type="checkbox"/> 18 White	<input type="checkbox"/> 68 Nickel
<input type="checkbox"/> 19 Natural brass	<input type="checkbox"/> 70 Brushed gold
<input type="checkbox"/> 20 Brushed chrome	

Exclusive Colors

Power cable:

3 m. Rodent proof cable (Standard)

Customer signature/Date: _____


Planning guide

VOLA T39ELUS (120V)

Towel warmer – electric.
 With step-less temperature regulation between 20 and 50 degrees C.
 Self-closing timer setting after two hours at full power (50 degrees C).
 Power consumption: 10W per bar.
 Supplied with 3 metres of rodent-proof cable (for built-in part).
 Must be installed by a qualified electrician.

VOLA A/S
 Lunavej 2
 8700 Horsens
 Tlf. 7023 5500
 sales@vola.dk
 www.vola.com

Diagram for reference only, please check your local building codes.
 - Installation in Zone 2 requires a GFCI power source.
 - Unit may not be installed in Zone 1 or 0

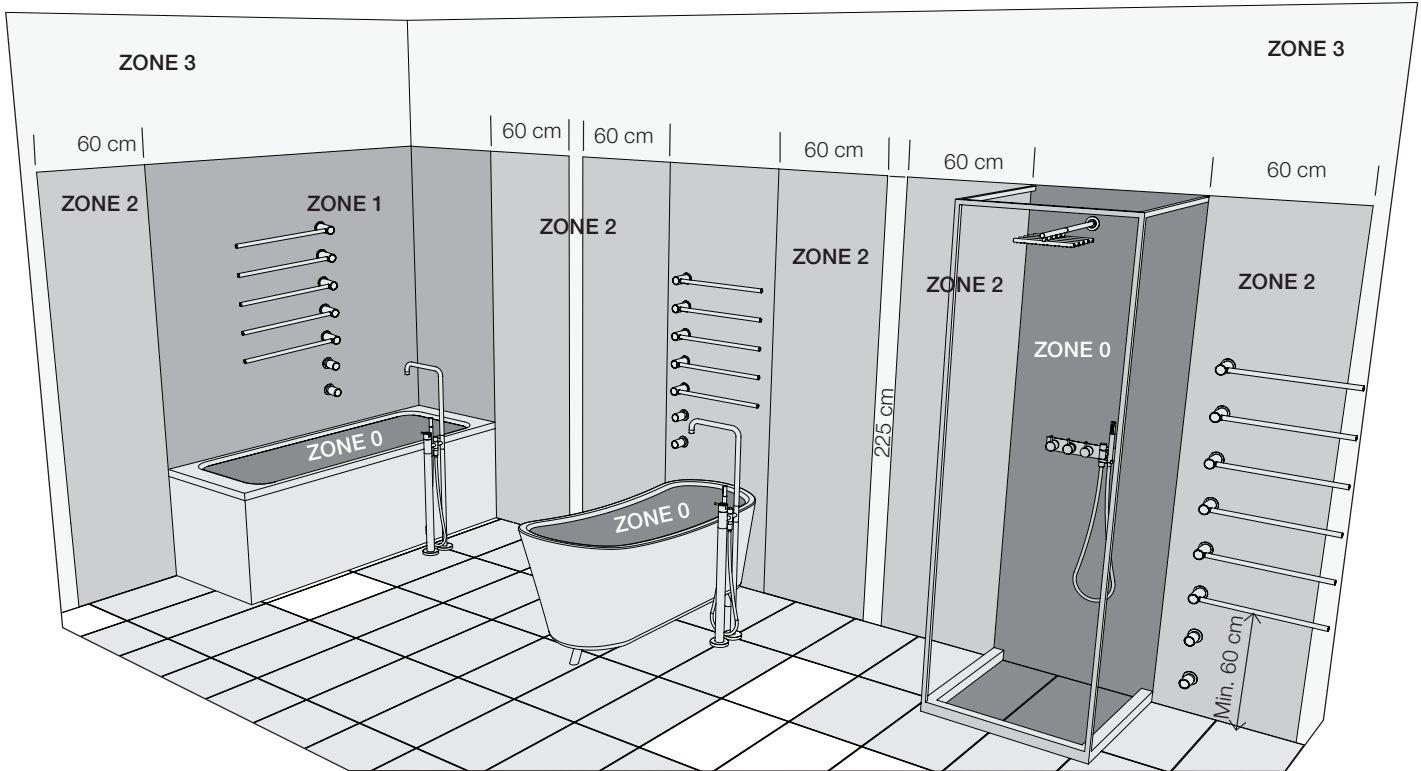

UK
CA

IPX5

CLASS I

120V~ 10W/

0	1	2	3	4	⌚
OFF	20°C 68°F	30°C 86°F	40°C 104°F	50°C 122°F	50°C 122°F

