



Owner: No.: ECO EPD: Issued: Valid to: OLA A/S ID-18007-EN 0000730 3-06-2018 3-06-2023

3rd PARTY VERIFIED



VERIFIED ENVIRONMENTAL PRODUCT DECLARATION | ISO 14025 & EN 15804







Owner of declaration VOLA A/S

Lunavej 2 8700 Horsens

Programme operator Danish Technological Institute www.dti.dk

Programme EPD Danmark www.epddanmark.dk

Declared products

5471R-061 - chromed brass 5471R-061 - stainless steel 2111C – chromed brass 2111C - stainless steel SC5 - chromed brass SC5 – stainless Steel

Production site

VOLA A/S Lunavej 2 8700 Horsens Denmark

Products use

VOLA fixtures are used in kitchens, bathrooms etc.

Declared unit

1 fixture





Kepddanmark

Issued: 13-06-2018

Valid to: 13-06-2023

Basis of calculation

This EPD is developed in accordance with the European standard EN 15804.

Comparability

EPDs of construction products may not be comparable if they do not comply with the requirements in EN 15804. EPD data may not be comparable if the datasets used are not developed in accordance with EN 15804 and if the background systems are not based on the same database.

Validity

This EPD has been verified in accordance with ISO 14025 and is valid for 5 years from the date of issue.

Use

The intended use of an EPD is to communicate scientifically based environmental information for construction products, for the purpose of assessing the environmental performance of buildings.

EPD type

⊠Cradle-to-gate □Cradle-to-gate with options □Cradle-to-grave

CEN standard EN 15804 serves as the core PCR Independent verification of the declaration and

> data, according to EN ISO 14025 ⊠ external

□ internal

Third party verifier:

Mistianen

Kim Christiansen

Killas

Henrik Fred Larsen EPD Danmark

Life	Life cycle stages and modules (MND = module not declared)															
	Product Construction process		Use					End of life			Beyond the system boundary					
Raw material supply	Transport	Manufacturing	Transport	Installation process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Re-use, recovery and recycling potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
x	X	x	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND



Product information

Product description

The main product components are shown in the table below. Values are given as intervals covering the six declared product variations. Specific recipes and some input materials (0-2 mass-%) are not shown in this table due to reasons of confidentiality.

Material	Weight-% of declared product
Brass	16-85
Stainless steel	0-73
Galvanized steel	0-16
Steel	0-11
PE foam	0-7
PE	2-3
PPO	0-3
Packaging material	kg per declared unit
Cardboard	0,3-1,6
Paper	0,04-0,1
LDPE	0,02-0,03

Representativity This declaration, including data collection and the modeled foreground system including results, represents the production of 1 fixture from VOLA on the production site located in Denmark. Product specific data are based on average values covering the period from 01.01.2016 to 31.12.2016. Background data are based on GaBi and are less than 10 years old. Only in a few cases are GaBi 8.2 data supplemented with data from Ecoinvent 3.3. Generally, the used background datasets are of high quality, and the majority of the datasets are only a few of years old.

Dangerous substances Our products do not contain substances listed in the "Candidate List of Substances of Very High Concern for authorisation"

(http://echa.europa.eu/candidate-list-table)

Essential characteristics There is no harmonized specification but VOLA fixtures are covered by different technical specification example EN 817.

VOLA produces according to relevant product standards. Components which are in contact with water are produced in lead-free brass, according to 4MS and California Assembly Bill AB1953.

Components in stainless steel are produced in material according to EN10088-3:2014 and AISI316 (American Iron and Steel Institute)

Further technical information can be obtained by contacting the manufacturer or on the manufacturers website:

http://www.vola.com





Reference Service Life No RSL is declared. This EPD is based on a cradle-to-gate assessment. (RSL)

Product illustrations





2111C



SC5







LCA background

Declared unit

The LCI and LCIA results in this EPD relates to 1 fixture from VOLA for the types: 5471R-061 – chromed brass, 5471R-061 – stainless steel, 2111C – chromed brass, 2111C – stainless steel, SC5 – chromed brass and SC5 – stainless steel.

Name	Value	Unit
Declared unit	1	piece
5471R-061 – chromed brass	18,7	kg/piece
5471R-061 – stainless steel	17,3	kg/piece
2111C – chromed brass	4,62	kg/piece
2111C – stainless steel	4,52	kg/piece
SC5 – chromed brass	2,28	kg/piece
SC5 – stainless steel	2,05	kg/piece
Conversion factor to 1 kg.	0.053-0.49	-


PCR

This EPD is developed according to the core rules for the product category of construction products in EN 15804.





Flow diagram

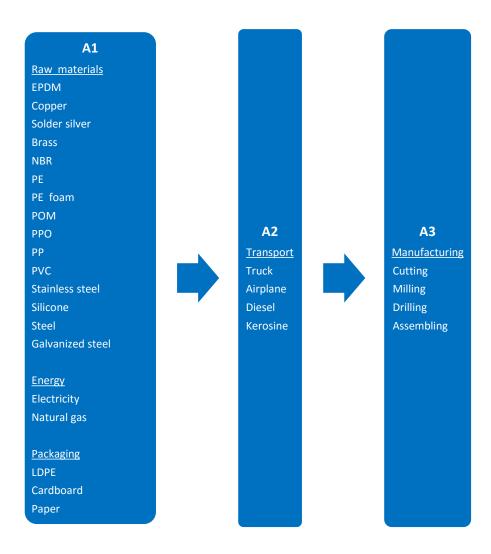





System boundary

This EPD is based on a cradle-to-gate LCA, in which >99 weight-% has been accounted for.

The general rules for the exclusion of inputs and outputs follows the requirements in EN 15804, 6.3.5, where the total of neglected input flows per module shall be a maximum of 5 % of energy usage and mass and 1 % of energy usage and mass for unit processes.

Product stage (A1-A3) includes:

- A1 Extraction and processing of raw materials
- A2 Transport to the production site
- A3 Manufacturing processes

The product stage comprises the acquisition of all raw materials, products and energy, transport to the production site, packaging and waste processing up to the "end-of-waste" state or final disposal. The LCA results are declared in aggregated form for the product stage, which means, that the sub-modules A1, A2 and A3 are declared as one module A1-A3.

Virtually all components are manufactured in Denmark. The raw material and few purchased components are mostly from Europe. From solid brass/stainless steel rods or pipes, components are rotated, drilled or milled on CNC machines.

Subsequently, the components are ground/polished to create a unique surface, either by manual or automatic processes. Some components are hand-soldered or soldered by induction.

The finished polished components are treated with a surface finish depending on the finish the customer wishes.

Production is based on LEAN-production, where stocks are minimized and where products are put into production as soon as they are sold (Make to order, MTO).

Each fixture is tested individually before it is packaged and shipped to the world.

VOLA A/S is certified according to the quality standards ISO 9001:2015, ISO 14001:2015 (environment) and OHSAS 18001:2008 (work environment).



LCA results

	ENVIRONMENTAL IMPACTS PER FIXTURE						
Parameter	Unit	5471R-061 chromed brass	5471R-061 stainless steel	2111C chromed brass	2111C stainless steel	SC5 chromed brass	SC5 stainless steel
		A1-A3	A1-A3	A1-A3	A1-A3	A1-A3	A1-A3
GWP	[kg CO ₂ -eq.]	2,89E+02	1,37E+02	4,54E+01	3,30E+01	4,88E+01	2,05E+01
ODP	[kg CFC11-eq.]	1,15E-05	2,14E-06	1,62E-06	6,23E-07	1,87E-06	9,02E-08
AP	[kg SO ₂ -eq.]	5,85E+00	2,75E+00	1,14E+00	7,84E-01	7,89E-01	1,61E-01
EP	[kg PO4 ³⁻ -eq.]	3,78E+00	1,75E+00	7,54E-01	5,17E-01	4,94E-01	7,85E-02
POCP	[kg ethene-eq.]	2,75E-01	1,30E-01	5,32E-02	3,69E-02	3,74E-02	8,28E-03
ADPE	[kg Sb-eq.]	6,10E-02	3,57E-02	1,27E-02	9,65E-03	7,88E-03	2,58E-03
ADPF	[MJ]	3,12E+03	1,57E+03	4,97E+02	3,74E+02	5,29E+02	2,43E+02
Caption		GWP = Global warming potential; ODP = Ozone depletion potential; AP = Acidification potential of soil and water; EP = Eutrophication potential; POCP = Photochemical ozone creation potential; ADPE = Abiotic depletion potential for non fossil resources; ADPF = Abiotic depletion potential for fossil resources					

RESOURCE USE PER FIXTURE							
Parameter	Unit	5471R-061 chromed brass	5471R-061 stainless steel	2111C chromed brass	2111C stainless steel	SC5 chromed brass	SC5 stainless steel
		A1-A3	A1-A3	A1-A3	A1-A3	A1-A3	A1-A3
PERE	[MJ]	8,32E+02	6,45E+02	1,47E+02	1,53E+02	1,44E+02	1,08E+02
PERM*	[MJ]	2,79E+01	2,79E+01	1,10E+01	1,10E+01	5,28E+00	5,28E+00
PERT	[MJ]	8,45E+02	6,58E+02	1,60E+02	1,66E+02	1,57E+02	1,21E+02
PENRE	[MJ]	3,54E+03	1,69E+03	5,42E+02	3,91E+02	5,92E+02	2,49E+02
PENRM**	[MJ]	5,03E+01	5,05E+01	5,96E+00	5,96E+00	6,84E+00	6,88E+00
PENRT	[MJ]	3,55E+03	1,70E+03	5,56E+02	4,05E+02	6,06E+02	2,63E+02
SM	[kg]	-	-	-	-	-	-
RSF	[MJ]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	[MJ]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	[m ³]	2,52E+00	1,08E+00	4,07E-01	2,74E-01	4,00E-01	1,27E-01
Caption	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non renewable primary energy excluding non renewable primary energy resources used as raw materials; PENRM = Use of non renewable primary energy excluding non renewable primary energy resources used as raw materials; PENRM = Use of non renewable primary energy excluding non renewable primary energy resources used as raw materials; PENRM = Use of non renewable primary energy excluding non renewable primary energy resources used as raw materials; PENRM = Use of non renewable primary energy resources; PENRM = Use of the primary energy resources are the primary energy resources; PENRM = Use of the primary energy resources;						

non renewable primary energy resources used as raw materials; PENRT = Total use of non renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non renewable secondary fuels; FW = Use of net fresh water

* Contribution from packaging material per product type: All ** Contribution from packaging material per product type: 1,1 MJ (5471R-061); 0,49MJ (2111C) and 0,61 MJ (SC5)

	OUTPUT FLOWS AND WASTE CATEGORIES PER FIXTURE						
Parameter	Unit	5471R-061 chromed brass	5471R-061 stainless steel	2111C chromed brass	2111C stainless steel	SC5 chromed brass	SC5 stainless steel
		A1-A3	A1-A3	A1-A3	A1-A3	A1-A3	A1-A3
HWD	[kg]	4,87E-06	4,05E-06	1,12E-06	1,05E-06	6,80E-07	5,34E-07
NHWD	[kg]	1,84E+00	8,55E+00	3,49E-01	1,33E+00	4,23E-01	1,91E+00
RWD	[kg]	2,59E-02	3,70E-02	5,29E-03	8,07E-03	5,16E-03	7,50E-03
CRU	[kg]	-	-	-	-	-	-
MFR	[kg]	-	-	-	-	-	-
MER	[kg]	-	-	-	-	-	-
EEE	[MJ]	-	-	-	-	-	-
EET	[MJ]	-	-	-	-	-	-
Caption	HWD = Hazardous waste disposed; NHWD = Non hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported electrical energy; EET = Exported thermal energy						





Additional information

Indoor air

The EPD does not give information on release of dangerous substances to indoor air because the horizontal standards on measurement of release of regulated dangerous substances from construction products using harmonized test methods according to the provisions of the respective technical committees for European product standards are not available.

Soil and water

The EPD does not give information on release of dangerous substances to soil and water because the horizontal standards on measurement of release of regulated dangerous substances from construction products using harmonized test methods according to the provisions of the respective technical committees for European product standards are not available.





References

Publisher	kttp://www.epddanmark.dk
Program operator	Danish Technological Institute Sustainable Construction Kongsvang Allé 29 DK-8000 Aarhus C http://www.teknologisk.dk
LCA-practitioner	Danish Technological Institute Sustainable Construction Gregersensvej DK-2630 Taastrup http://www.teknologisk.dk
LCA software /background data	Thinkstep GaBi 8.2 2017 incl. databases + Ecoinvent 3.3 2017 <u>http://www.gabi-software.com</u> <u>http://www.ecoinvent.org</u>
3 rd party verifier	Kim Christiansen – kimconsult.dk

General program instructions

Version 1.9 www.epddanmark.dk

EN 15804

DS/EN 15804 + A1:2013 - "Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products"

EN 15942

DS/EN 15942:2011 – " Sustainability of construction works – Environmental product declarations – Communication format business-to-business"

ISO 14025

DS/EN ISO 14025:2010 – " Environmental labels and declarations – Type III environmental declarations – Principles and procedures"

ISO 14040

DS/EN ISO 14040:2008 – " Environmental management – Life cycle assessment – Principles and framework"

ISO 14044

DS/EN ISO 14044:2008 – " Environmental management – Life cycle assessment – Requirements and guidelines"