


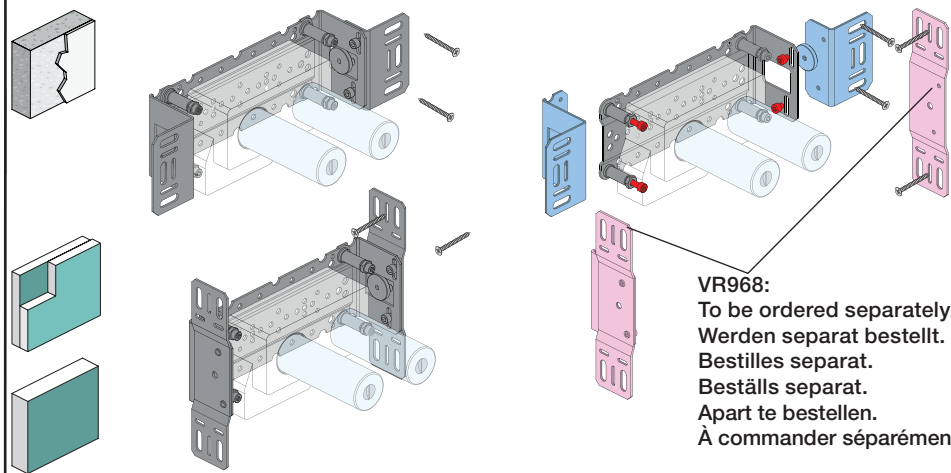

A diagram showing three cylindrical components mounted on a horizontal plate. The middle component has a curved arrow indicating rotation.

voilà

[illegible]

VR968:
To be ordered separately.
Werden separat bestellt.
Bestilles separat.
Beställs separat.
Apart te bestellen.
À commander séparément.

Max. 65°C, 150°F

5100/5200V/5300:

5400/5600A3:

5400/5600:  - 


5400/5600A4:  - 

5400 5600	5400A3 5600A3	5400A4 5600A4							
									
Out 2	Out 1	Out 1	32/(8.5)	16/(4.2)	-	-	-	-	-
Out 3	Out 2	Out 2	-		32/(8.5)	16/(4.2)	-	-	-
-	Out 3	Out 3	-	-	-		32/(8.5)	16/(4.2)	-
-	-	Out 4	-	-	-	-	32/(8.5)		

 USA - For use with showerheads rated at 5.7 L/min. (1.5 gpm.) or higher.

 AUS - Hot water inlet:
Max. 50°C, 122°F.
(AS 4032)

**!DO NOT!
!REMOVE!**




  DE:
Bitte separat beiliegende Anleitung für die Schallentkopplung
VR972 beachten


Ingår inte i leveransen, köps separat.
Ikke inkludert, kjøpes separat.
Eivät sisälly tilaukseen, ostettava erikseen.

200M

PEX1

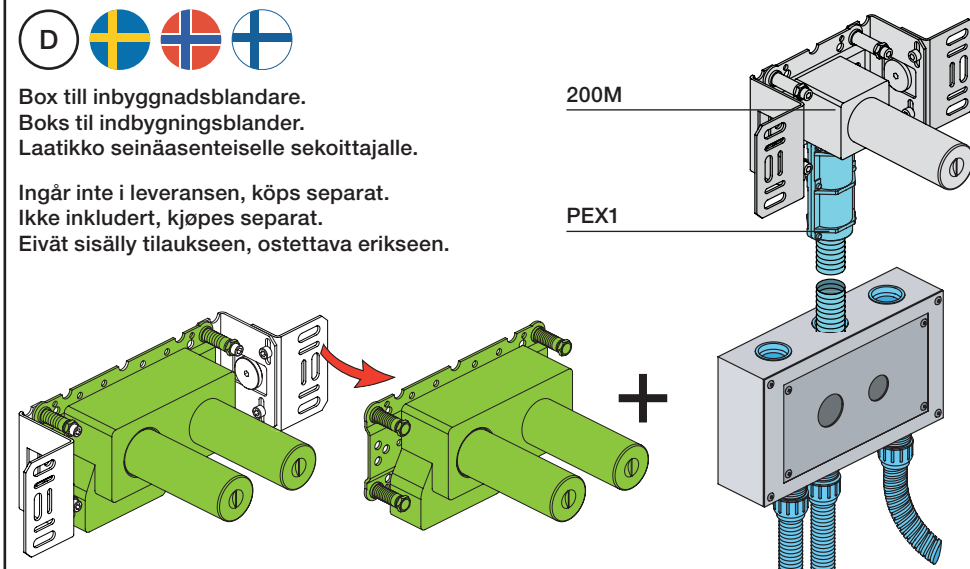


Y Min. 48 mm
Max. 110 mm

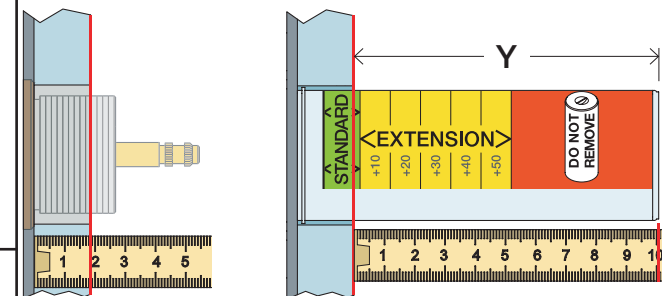

	T	Y	VR5250/VR5410/VR2019
	3 - 15 mm	110 - 98 mm	Std.
	15 - 25 mm	98 - 88 mm	+10
	25 - 35 mm	88 - 78 mm	+20
	35 - 45 mm	78 - 68 mm	+30
	45 - 55 mm	68 - 58 mm	+40
	55 - 65 mm	58 - 48 mm	+50


Montering af forlængerdele
Montering av förlängning

VR5250

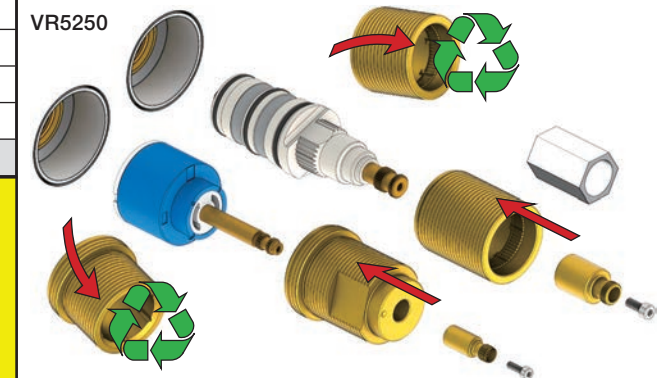


Montering af forlængerdele
Montering av förlängning

VR5410

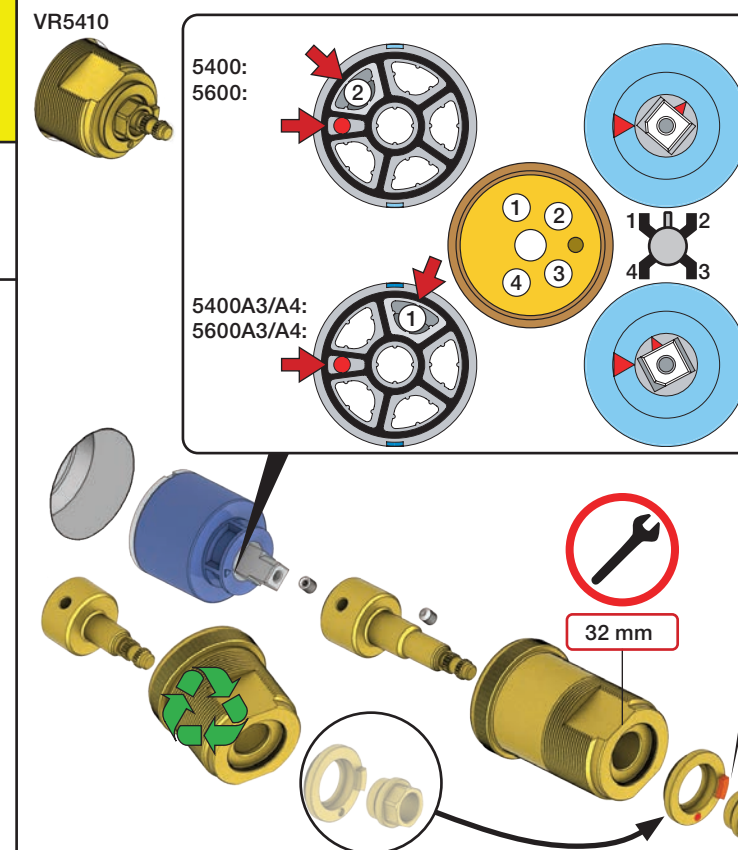


X_{52 - 0 mm}

X_{-15 - 0 mm}

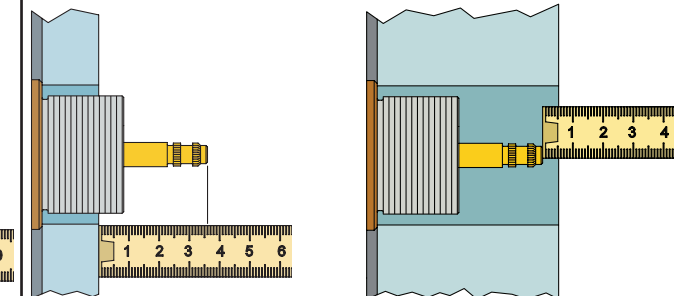


	X	VR5250/VR5410/VR2019
	37 - 49 mm	Std.
	27 - 37 mm	+10
	17 - 27 mm	+20
	7 - 17 mm	+30
	-3 - 7 mm	+40
	-13 - -3 mm	+50

Montage van de verlengstukken		
Montage des rallonges		

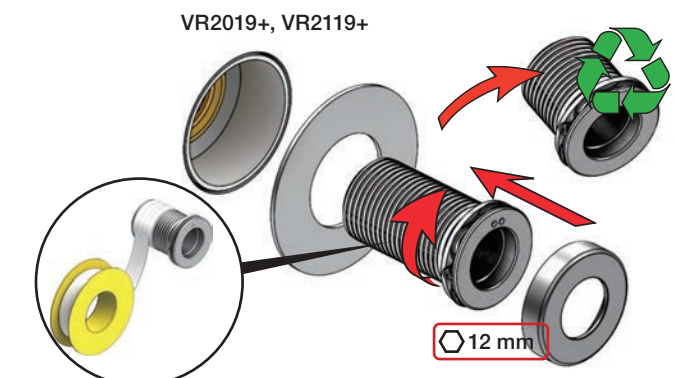

VR2019+, VR2119+

5400/5600: 5400A3/ 5600A3: 5400A4:

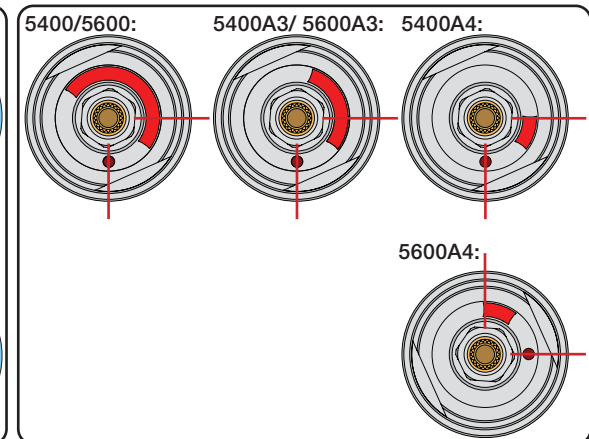

VR5411

32 mm

14 n



2x13 mm Lightweight wall
Leichtwand
Let væg

Lätta konstruktion
Holle wandconstructie
Construction légère



1x15 mm
1x18 mm
1x20 mm

Lightweight wall
Leichtwand
Let væg

Lätta konstruktion
Holle wandconstructie
Construction légère

2x13 mm



Masonry
Mauerwerk
Murværk

Murverk
Massieve wand
Mur Plein




2

Test Pressure
Prüfdruck
testtryk
Test tryck
Test druk
test de pression


Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera lokala föreskrifter.
Nazitten lokale regelgeving.
Vérifiez la législation locale.

! Water - Wasser - Vand - Vatten - Water - L'eau
! MAX 1 Minute - Minut - Minuut !

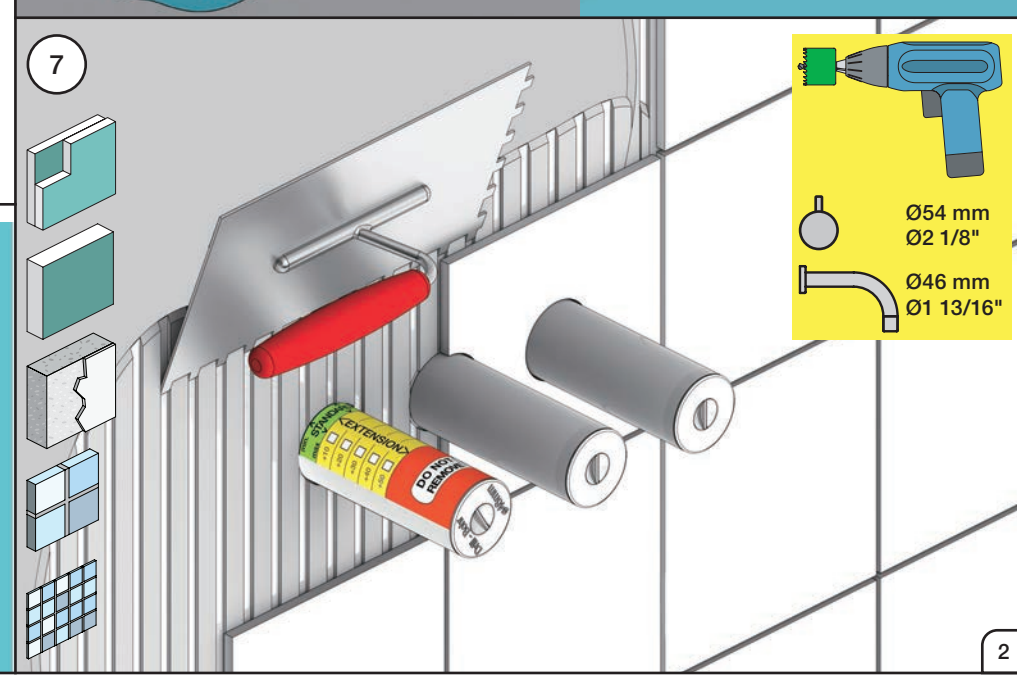

VOLA 070, 070R, 070-HT2


Fitting instruction
Montageanleitung
Monteringsvejledning
Monteringsvægledning
Montage hanleiding
Manuel de montage

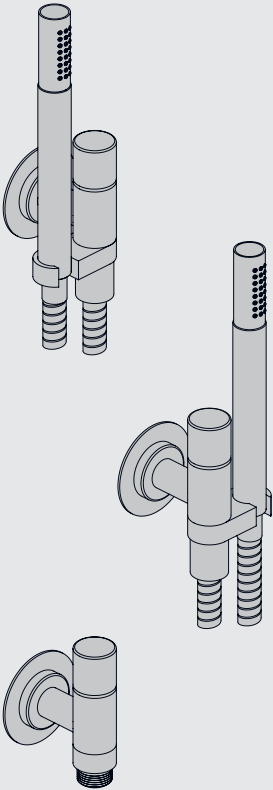



Data	Bar:	1	2	3	4	5
070/070R	(l/min) (Gal/min)	9 2.5	9 2.5	9 2.5	9 2.5	9 2.5
070-HT2	(l/min) (Gal/min)	9 2.5	12 3.2	15 4.0	17 4.5	19 5
	Max. 65°C. 150°F					





VR161:
VR161K: 7 l/min - 1.8 Gal/min (Cal Green)




070

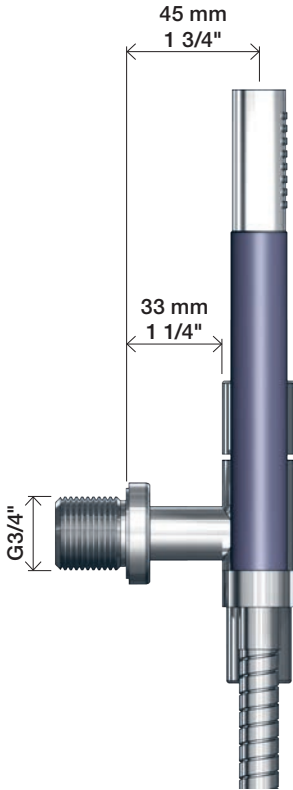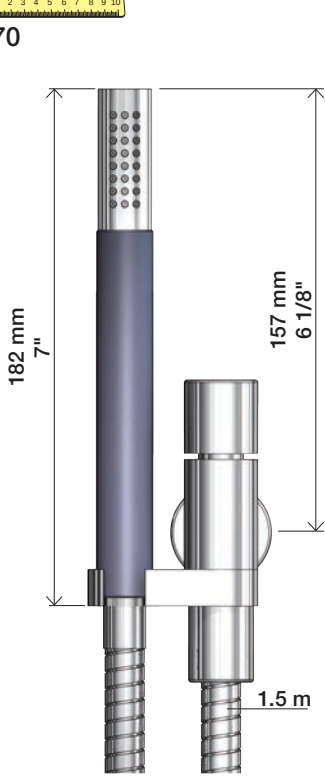

070R

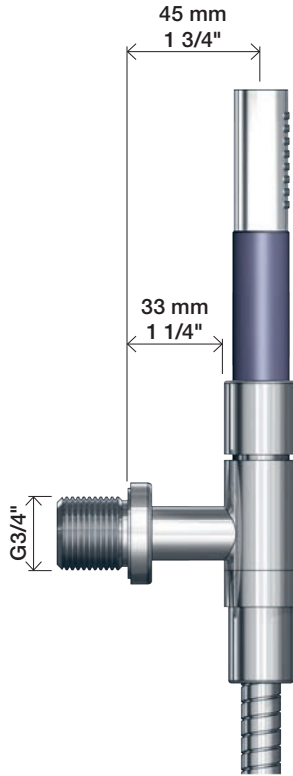
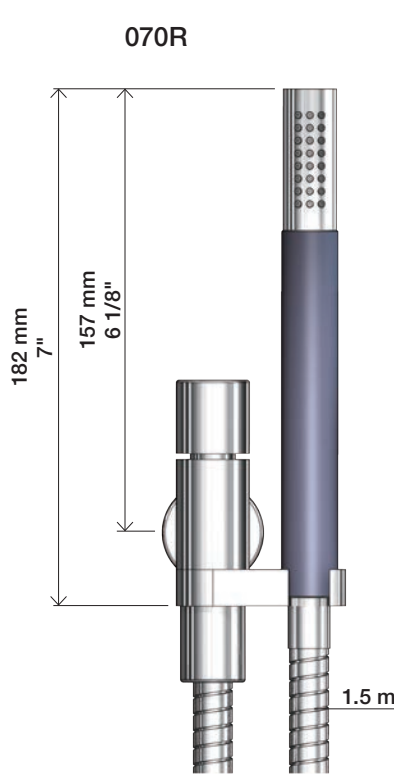


070-HT2





Extension Verlängerung	Forlængerdele Förlängning	Verlengstukken Modification
T Min. 3 mm Max. 65 mm Y Min. 48 mm Max. 110 mm		
T	Y	VR2019
3 - 15 mm	110 - 98 mm	Std.
15 - 25 mm	98 - 88 mm	+10
25 - 35 mm	88 - 78 mm	+20
35 - 45 mm	78 - 68 mm	+30
45 - 55 mm	68 - 58 mm	+40
55 - 65 mm	58 - 48 mm	+50

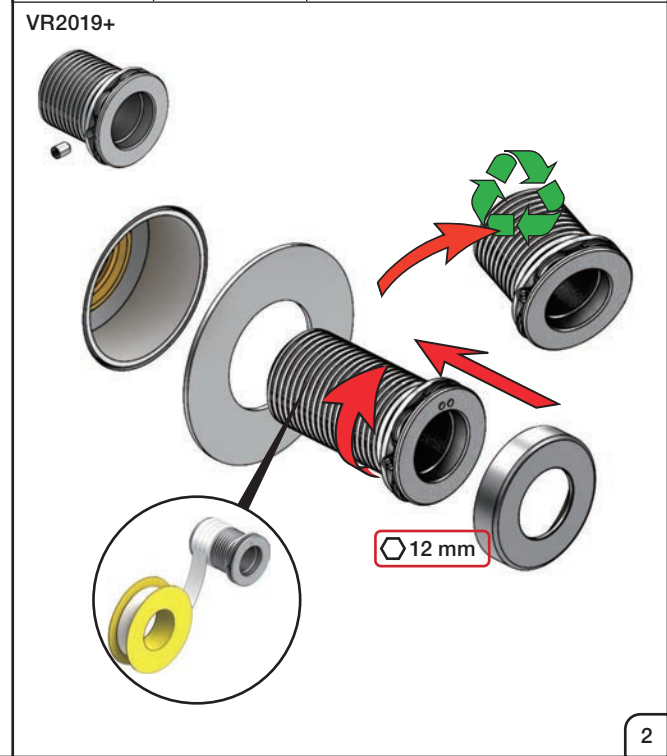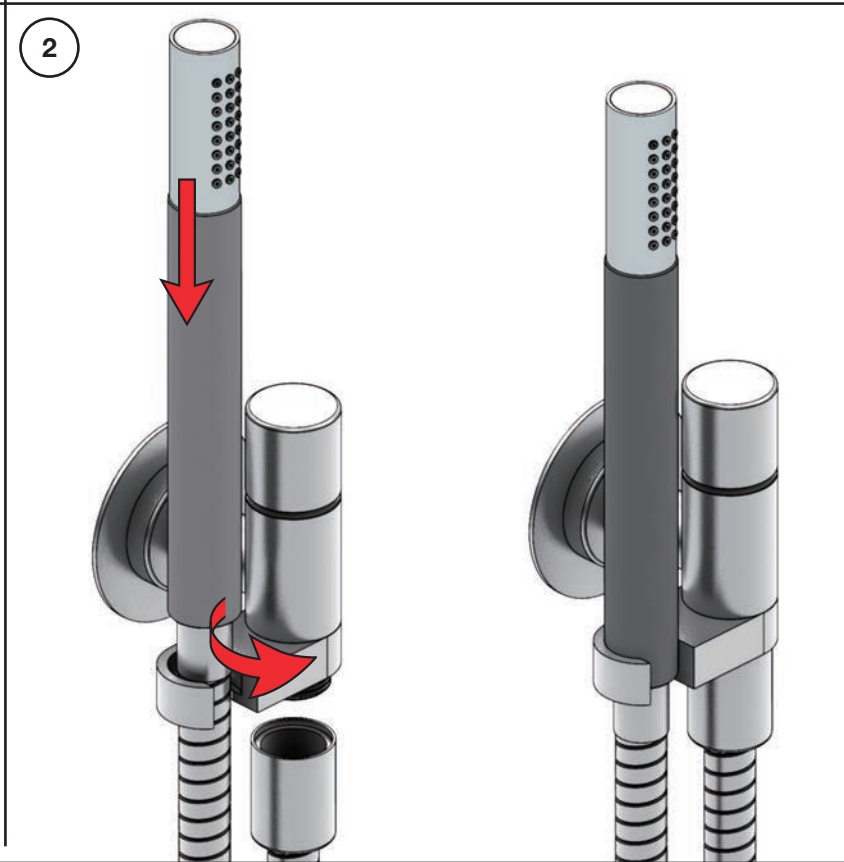



Do not cut the membrane
Die Membran nicht schneiden
Skær ikke membranen
Skär inte membranet
Snij het membraan niet door
Ne coupez pas la membrane
No cortar la membrana

NR.51:


1

NR.52+64:


2

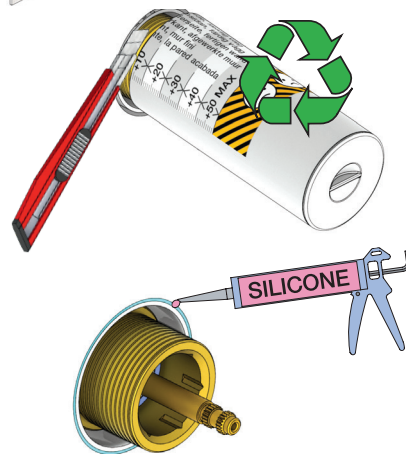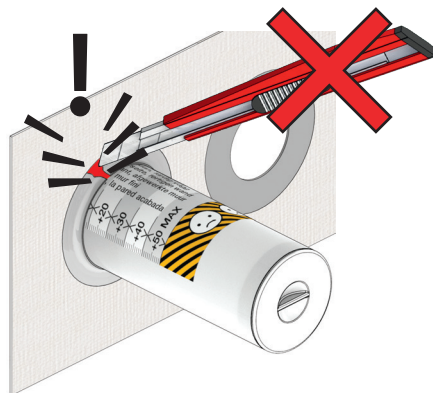

NR 51




NR 51 - 1



VR2279


VR2279B

VR2279C




		A
VR2279	16 mm	16 - 22 mm
VR2279B	12 mm	12 - 18 mm
VR2279C	8 mm	8 - 15 mm


NR 51 - 2

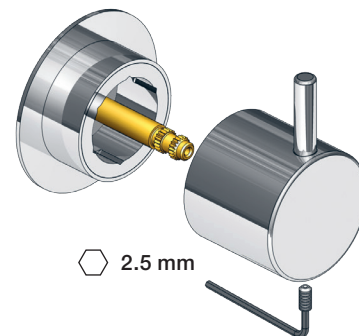


NR 52



NR 52 - 1



NR 52 - 2

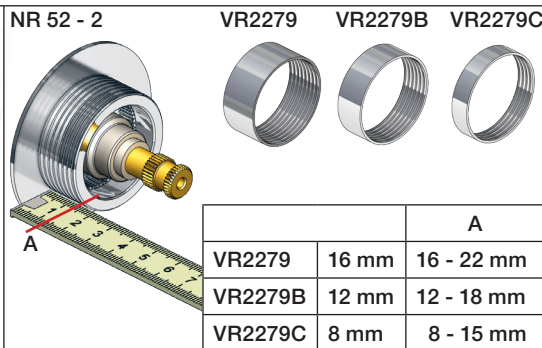


NR 52 - 3


Anti scald settings
Verbrühschutz
Skoldningssikring
Skållnings skydd
Broeien verzekeringen
Prévention des brûlures




38°C
100°F

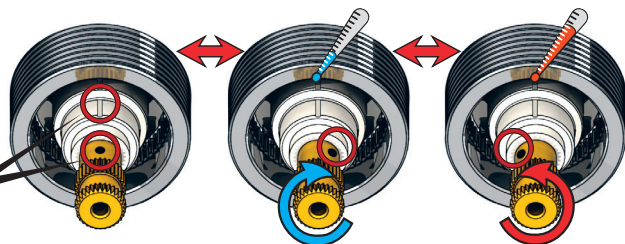


NR 52 - 4

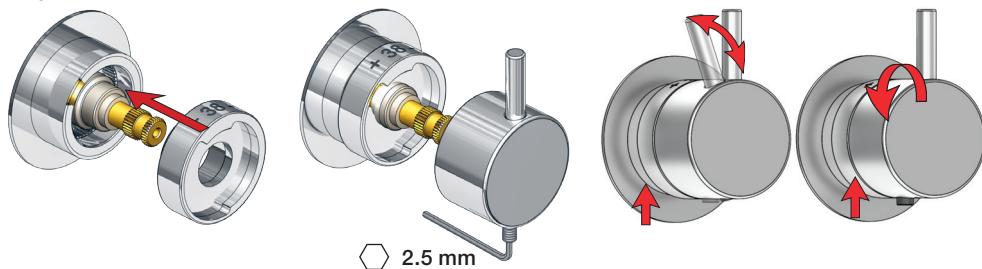


NR 64




NR 64 - 1

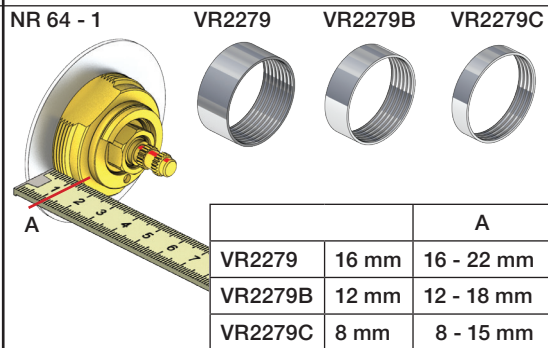

NR 64 - 2

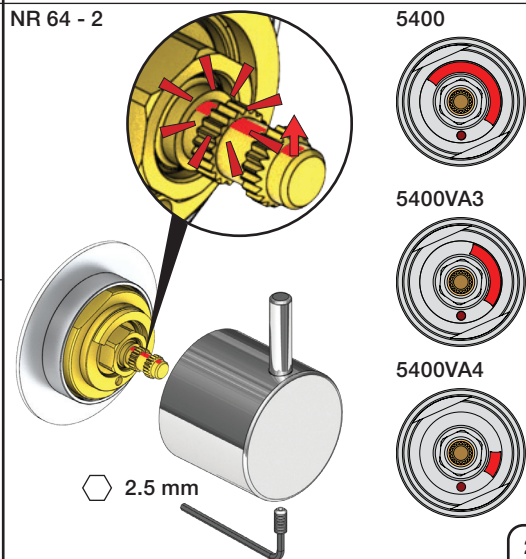

VOLA T34

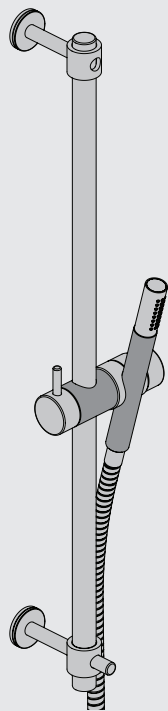


www.vola.com




vola

mnt_T34_V2_40998687




14-06-2022 5 705230 173658

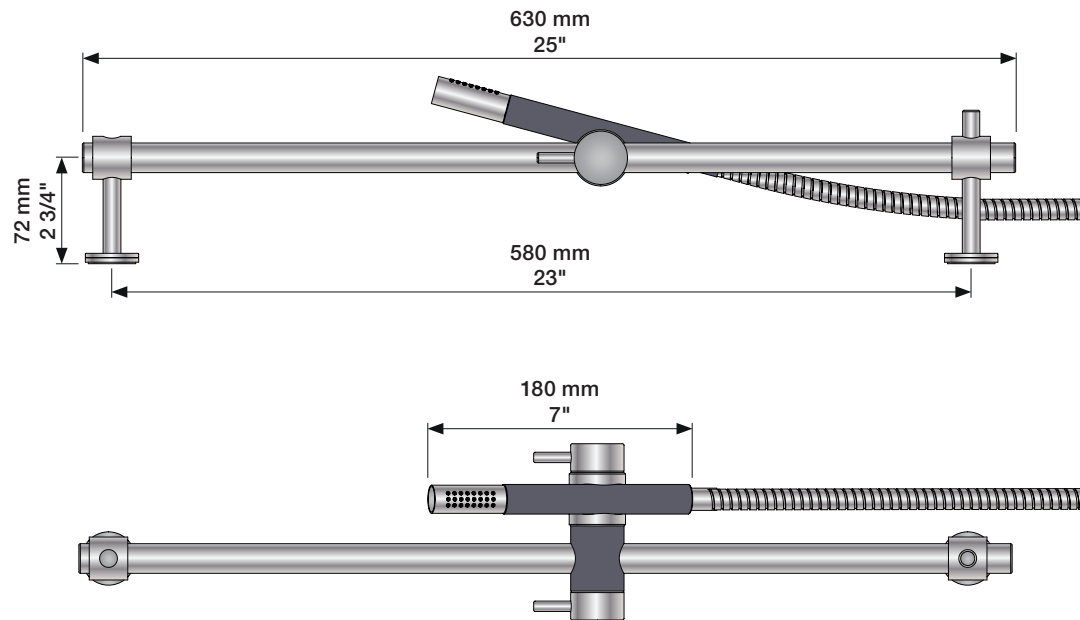


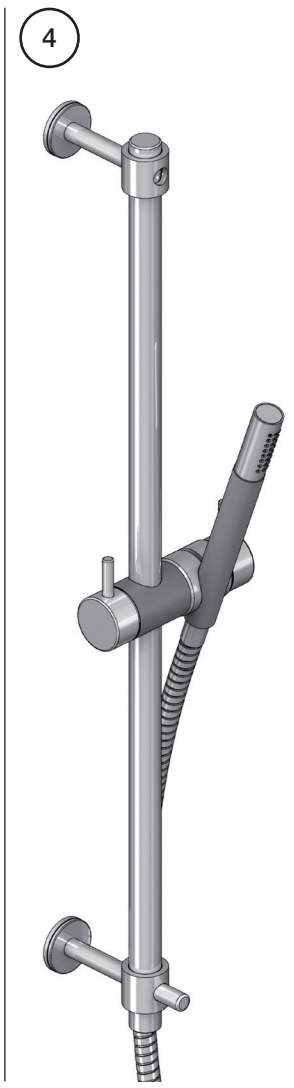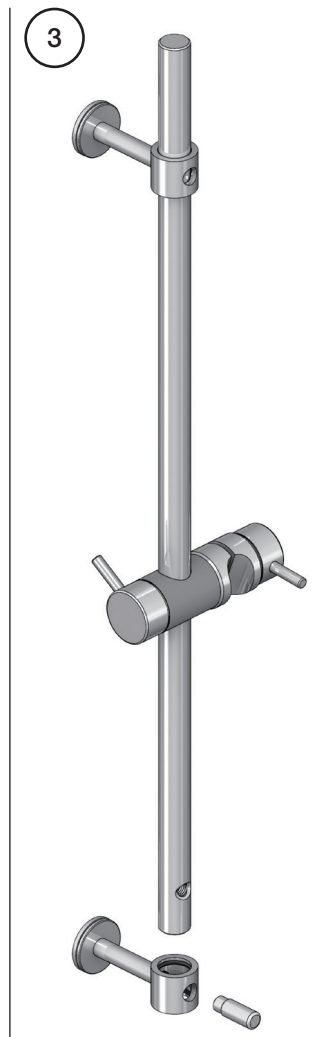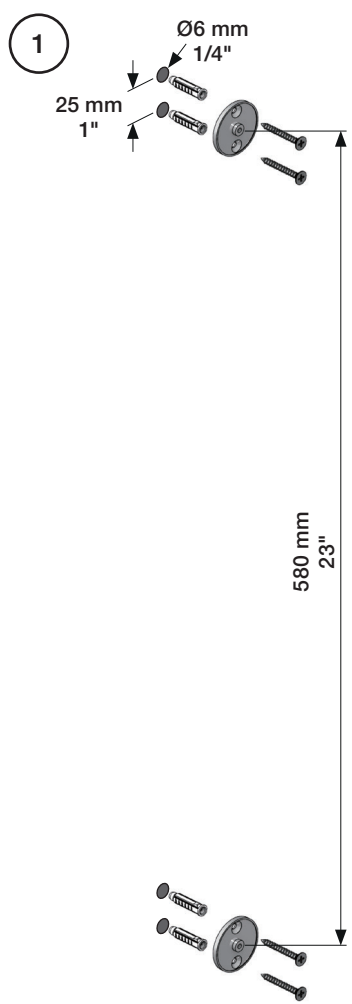

5100

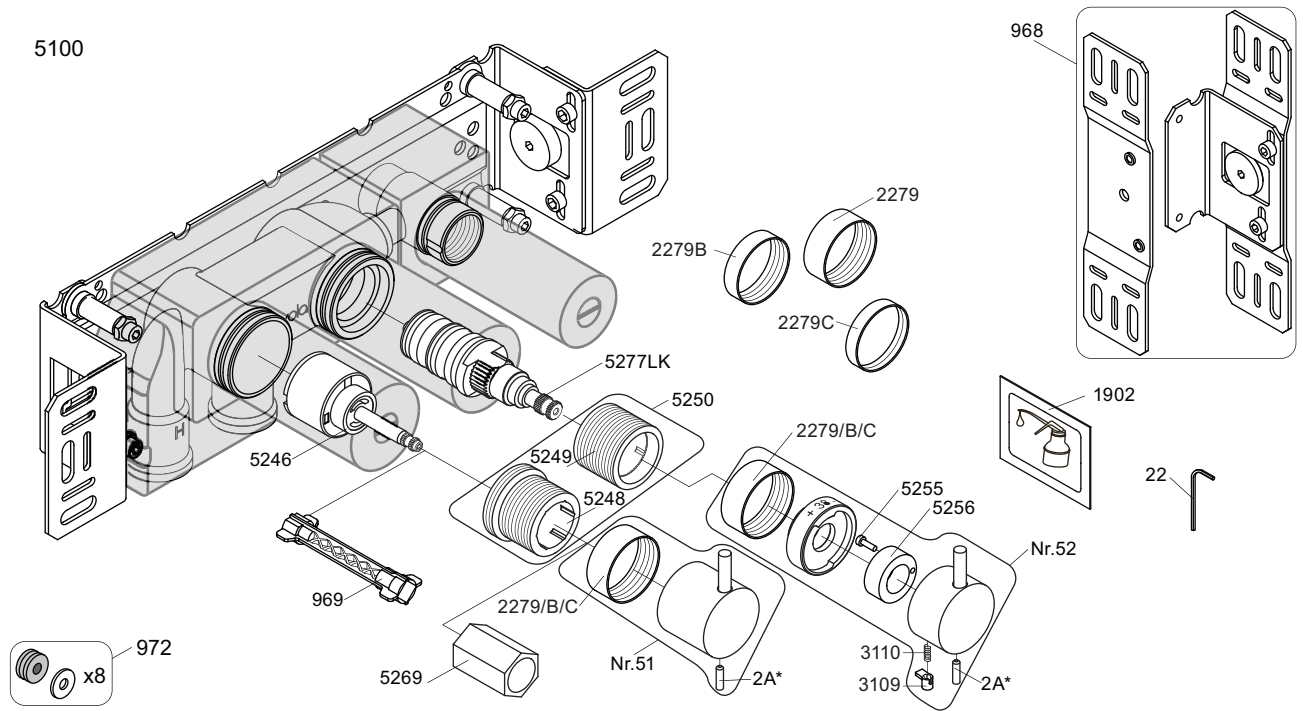


5250+





2A*  Color
VR2A-Steel: Standard
VR2A-F60: F17-F27-F60
VR2A-F63: F63-F64
VR2A-F65: F19-F65-F70

NR51: VR5251, VR2279+B+C, VR2A
NR52: VR2A, VR5252, VR5253, VR5255, VR5256, VR2279+B+C, VR3113, VR2A
VR3113: VR3109, VR3110, VR5255
VR5250+: VR5248+, VR5249+, VR5257, VR5258, VR5259, VR5260
VR5257+: VR5257+, VR5259+
VR5258+: VR5258+, VR5260+


5100/5100X/5300

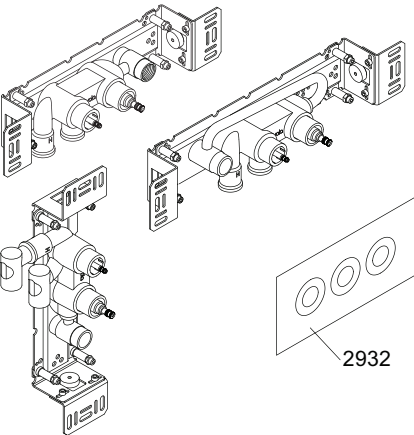

5200V

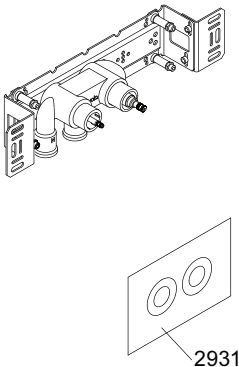

5003K



5002



2x2001, 001



2x2001



vola
Lunavej 2
DK-8700 Horsens
Tlf : + 45 7023 5500
sales@vola.com
www.vola.com


VOLA 5100
5100X, 5200V, 5300

Date
May 22


Rev.
4

Sheet
SB 10.51

T34

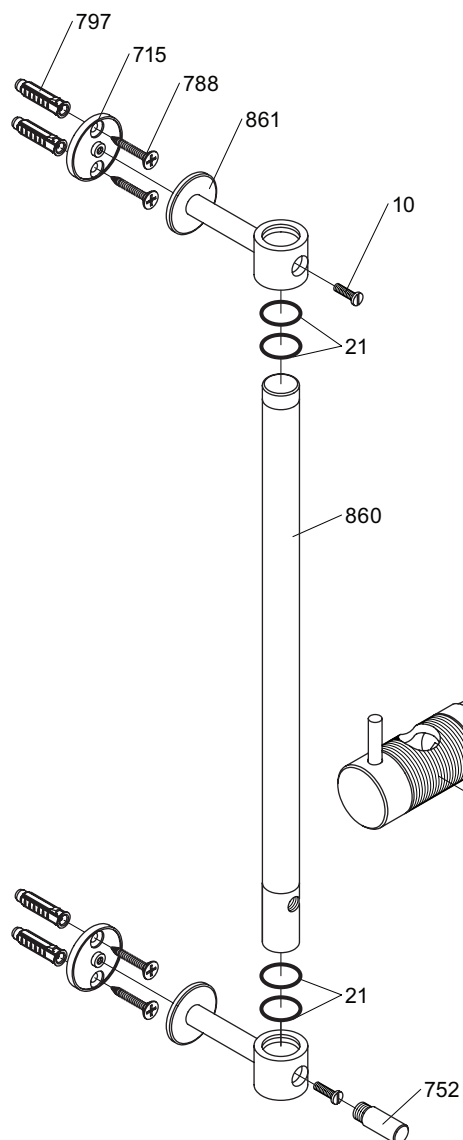

T2

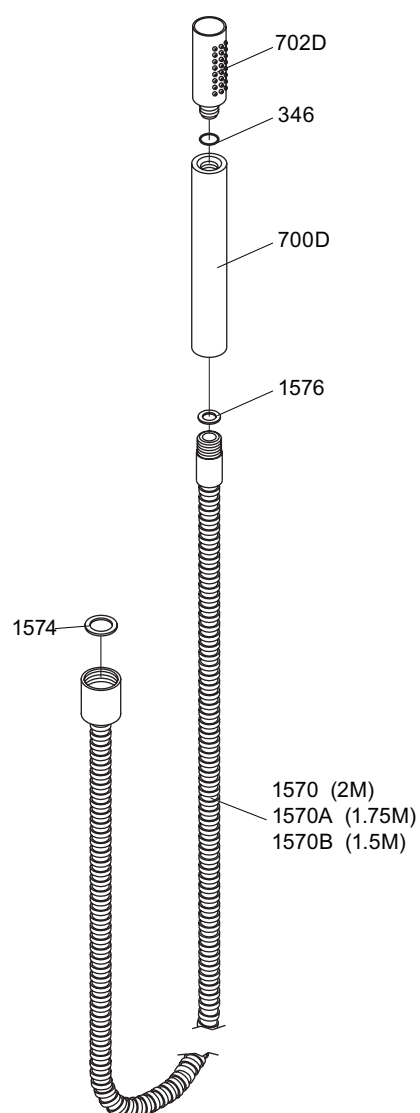

vola®

Lunavej 2
DK-8700 Horsens
Tlf : + 45 7023 5500
sales@vola.com
www.vola.com

VOLA T34

Date
Apr. 03

Rev.
4

Sheet
SB 42.25