

Fitting instruction
Montageanleitung
Monteringsvejledning
Monteringsvægledning
Montage hanleiding
Manuel de montage



T60:



T68:



T65:



1

T60

28 mm
1 1/8"

55 mm
2 1/8"

Ø17 mm
Ø11/16"

290 mm
11 3/8"

1500 mm
5'

G1/2"

28 mm
1 1/8"

Ø60 mm
Ø2 3/8"

Data	Bar:	1	2	3	4	5
T60	(l/min) (Gal/min)	6.9 1.8	9.8 2.6	12 3.2	14 3.7	15 4.1
	Max. 65°C. 150°F					

Service - VR556

USA: Max. flow rate:
1.6 Gal/min
6.0 l/min.

3

T65

50 mm
2"

55 mm
2 1/8"

Ø60 mm
Ø2 3/8"

50 mm
2"

Bathtub
Badewanne

Badekar
Badkar

Badkuip
Baignoire

2

T68

Ø43 mm
Ø1 3/4"

40 mm
1 5/8"

Ø6 mm
1/4"

25 mm
1"

001G

Min. 200 mm
Min. 8"

Min. 350 mm
Min. 14"

40 mm
1 5/8"

070

T68

790 mm
31"

690 mm
27 1/8"

590 mm
23 1/4"

490 mm
19 1/4"

900 mm
35 3/8"



800 mm
31 1/2"

700 mm
27 1/2"




600 mm
23 5/8"

1


4

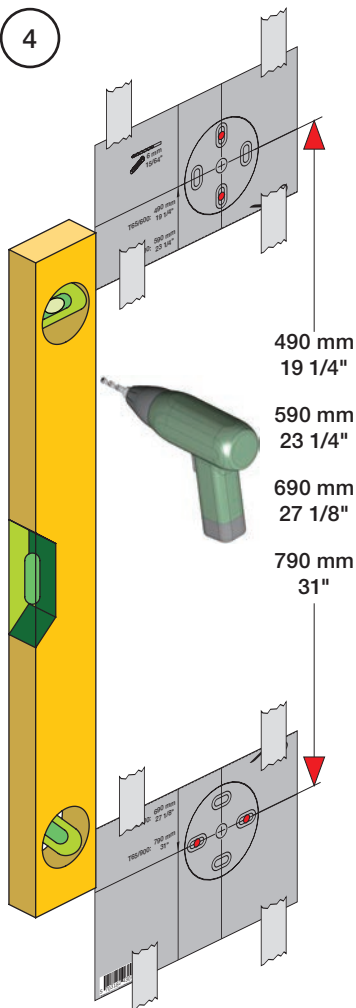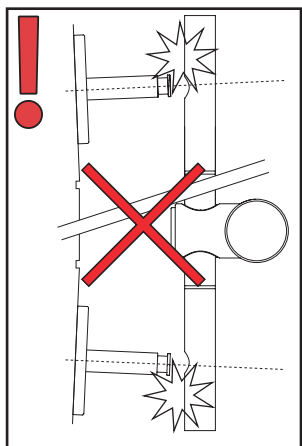490 mm
19 1/4"590 mm
23 1/4"690 mm
27 1/8"790 mm
31"




5

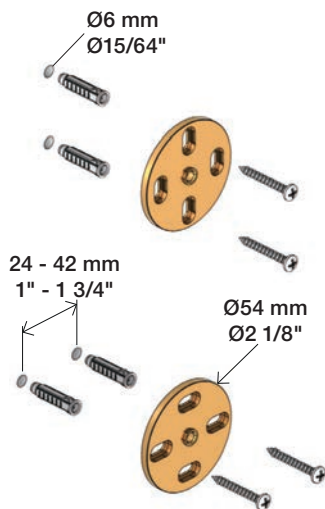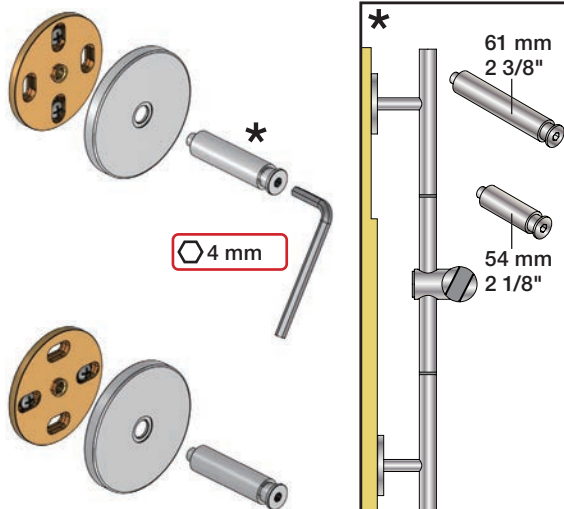24 - 42 mm
1" - 1 3/4"Ø54 mm
Ø2 1/8"

Ø4 mm

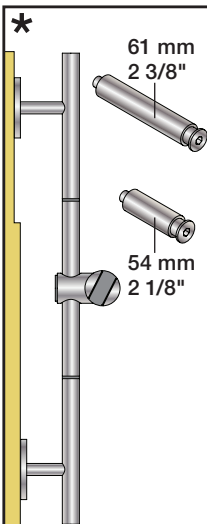

6

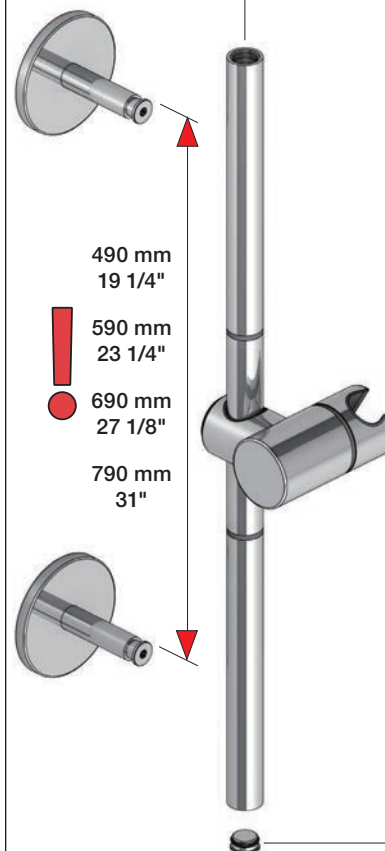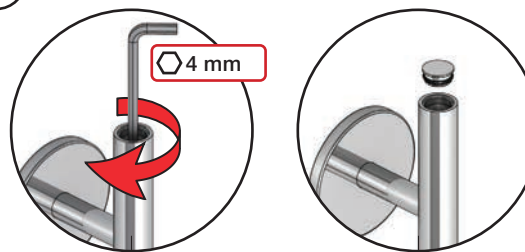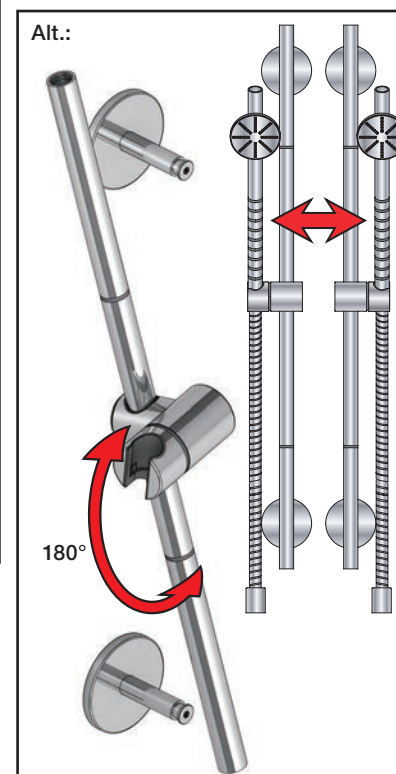490 mm
19 1/4"590 mm
23 1/4"690 mm
27 1/8"790 mm
31"

Alt.:

180°

7



8



Ø2 mm




A diagram showing three cylindrical components mounted on a horizontal plate. The middle component has a curved arrow indicating rotation.

voilà



5 705230 287317

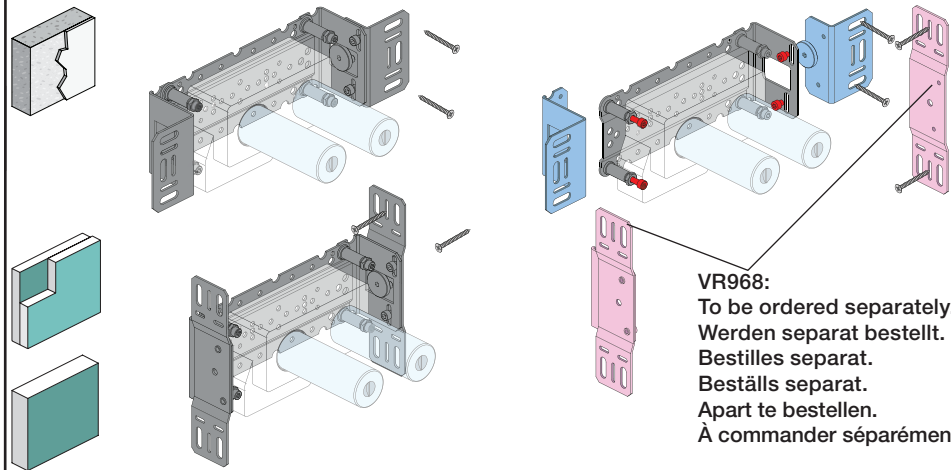

VR968:
To be ordered separately.
Werden separat bestellt.
Bestilles separat.
Beställs separat.
Apart te bestellen.
À commander séparément.



USA - For use with showerheads rated at 5.7 L/min. (1.5 gpm.) or higher.


 AUS - Hot water inlet:
Max. 50°C, 122°F.
(AS 4032)

5400/5600A3:


5400/5600A4: -

5400 5600	5400A3 5600A3	5400A4 5600A4							
									
Out 2	Out 1	Out 1	32/(8.5)	16/(4.2)	-	-	-	-	-
Out 3	Out 2	Out 2	-		32/(8.5)	16/(4.2)	-	-	-
-	Out 3	Out 3	-	-	-		32/(8.5)	16/(4.2)	-
-	-	Out 4	-	-	-	-	32/(8.5)		



**!DO NOT!
!REMOVE!**



PEX1

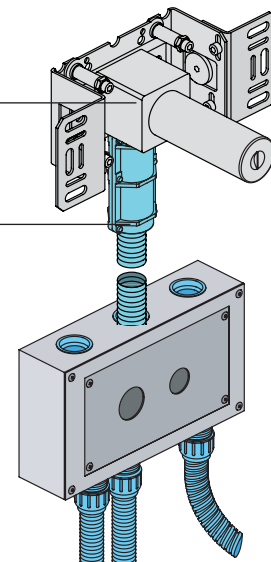


Y Min. 48 mm
Max. 110 mm

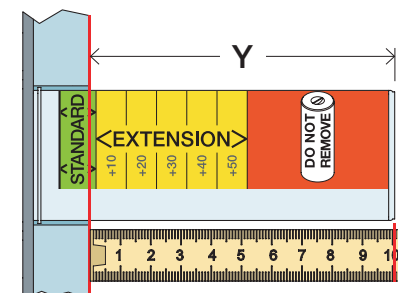




	T	Y	VR5250/VR5410/VR2019
	3 - 15 mm	110 - 98 mm	Std.
	15 - 25 mm	98 - 88 mm	+10
	25 - 35 mm	88 - 78 mm	+20
	35 - 45 mm	78 - 68 mm	+30
	45 - 55 mm	68 - 58 mm	+40
	55 - 65 mm	58 - 48 mm	+50

Montering af forlængerdele
Montering av förlängning

VR2019+. VR2119+


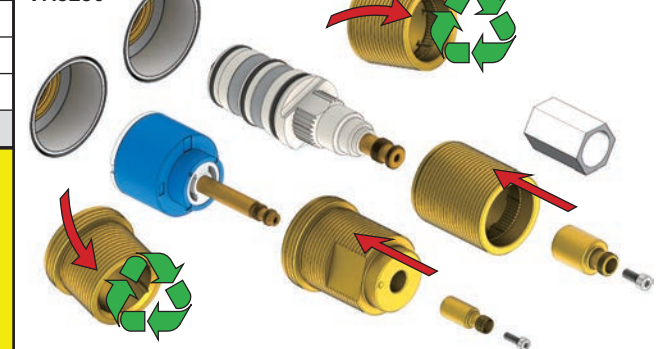


5400:
5600:

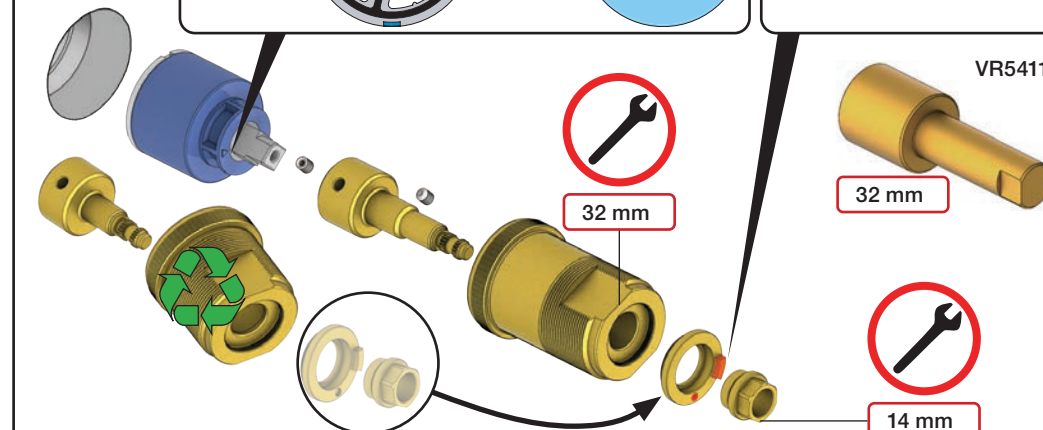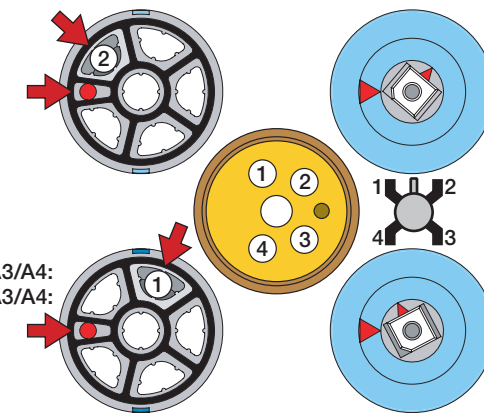


X₅₂ - 0 mm

X_{-15 - 0 mm}




	X	VR5250/VR5410/VR2019
	37 - 49 mm	Std.
	27 - 37 mm	+10
	17 - 27 mm	+20
	7 - 17 mm	+30
	-3 - 7 mm	+40
	-13 - -3 mm	+50

Montage van de verlengstukken			
Montage des rallonges			

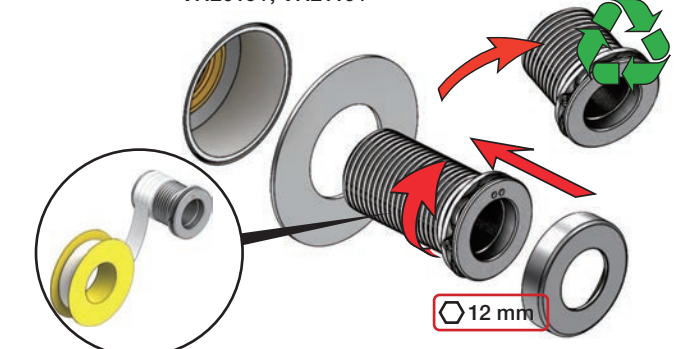

5400/5600: 5400A3/ 5600A3: 5400A4:

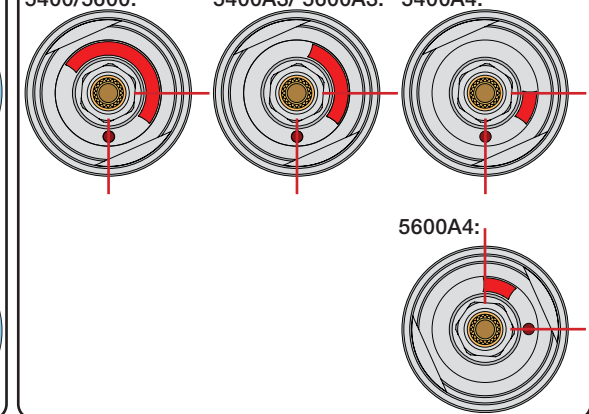

VR5411


32 mm

14



2x13 mm Lightweight wall
Leichtwand
Let væg

Lätta konstruktion
Holle wandconstructie
Construction légère

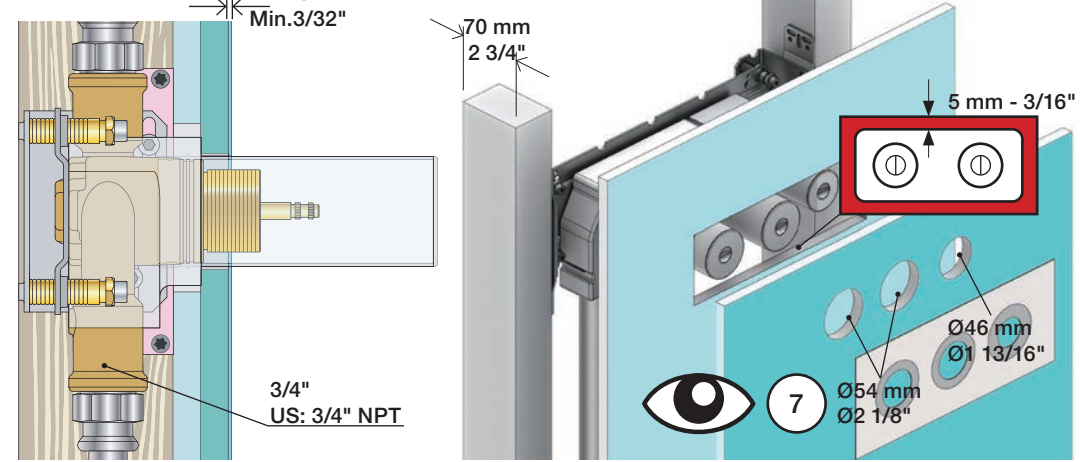

1x15 mm
1x18 mm
1x20 mm

Lightweight wall
Leichtwand
Let væg


Lätta konstruktion
Holle wandconstructie
Construction légère

2x13 mm



Masonry
Mauerwerk
Murværk

Murverk
Massieve wand
Mur Plein







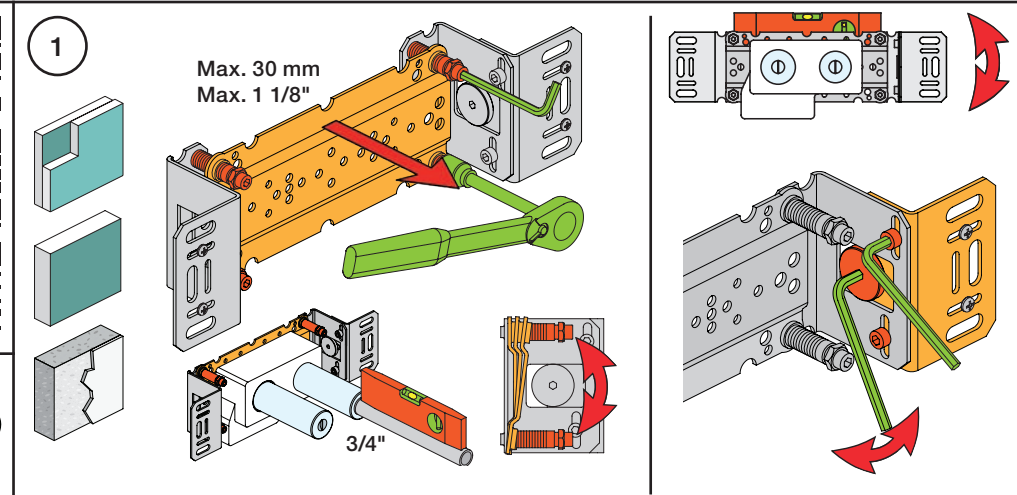


2

Test Pressure
Prüfdruck
testtryk
Test tryck
Test druk
test de pression

Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera lokala föreskrifter.
Nazitten lokale regelgeving.
Vérifiez la législation locale.

! Water - Wasser - Vand - Vatten - Water - L'eau
! MAX 1 Minute - Minut - Minuut !

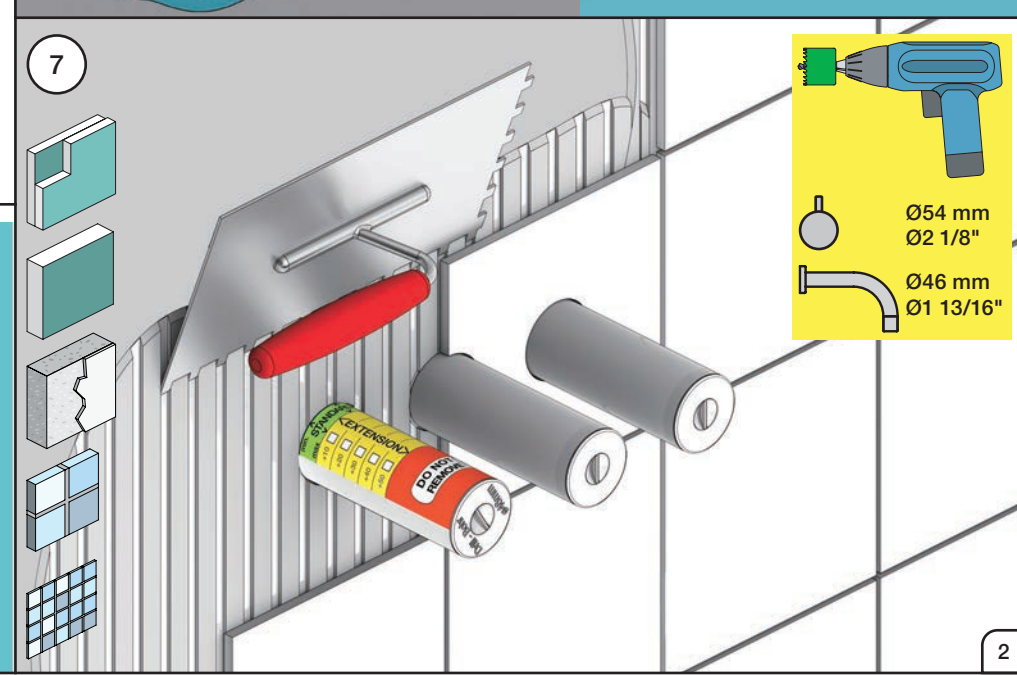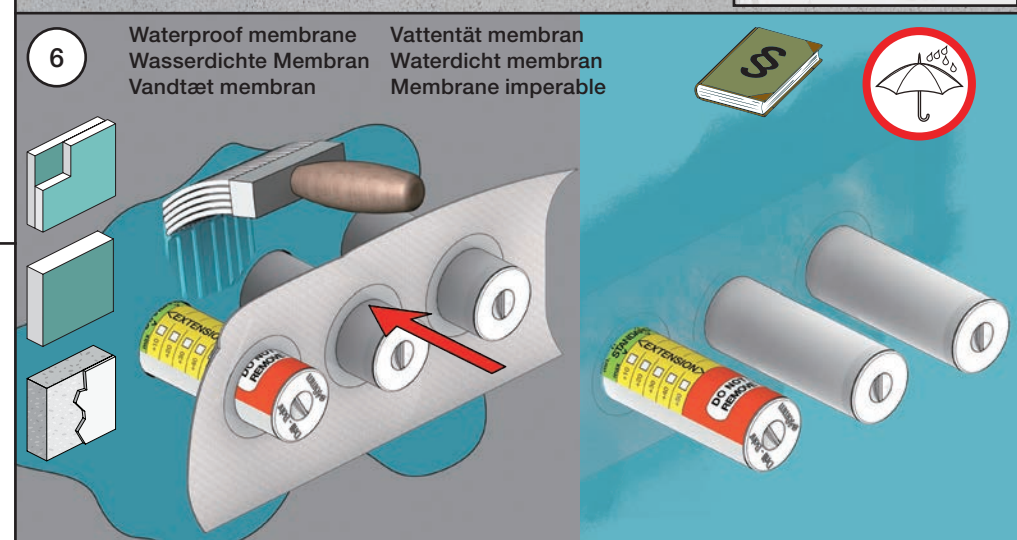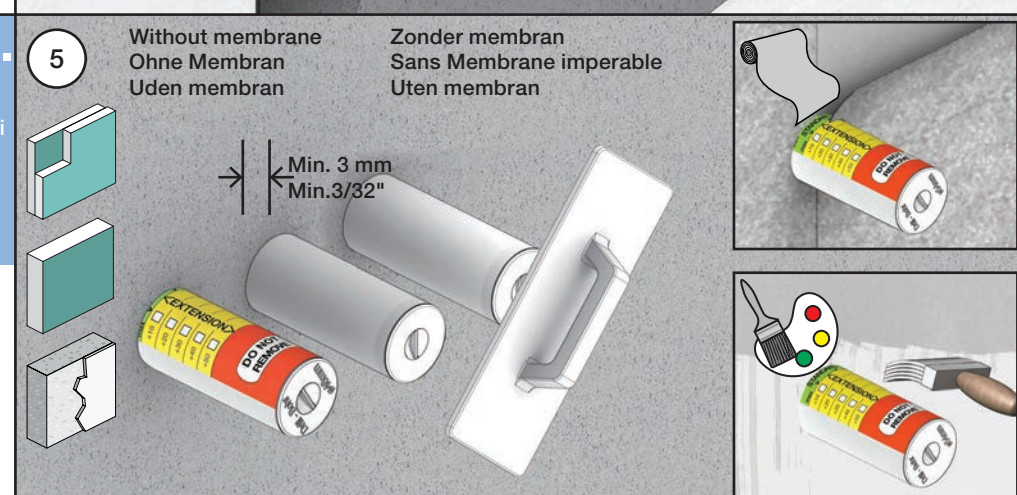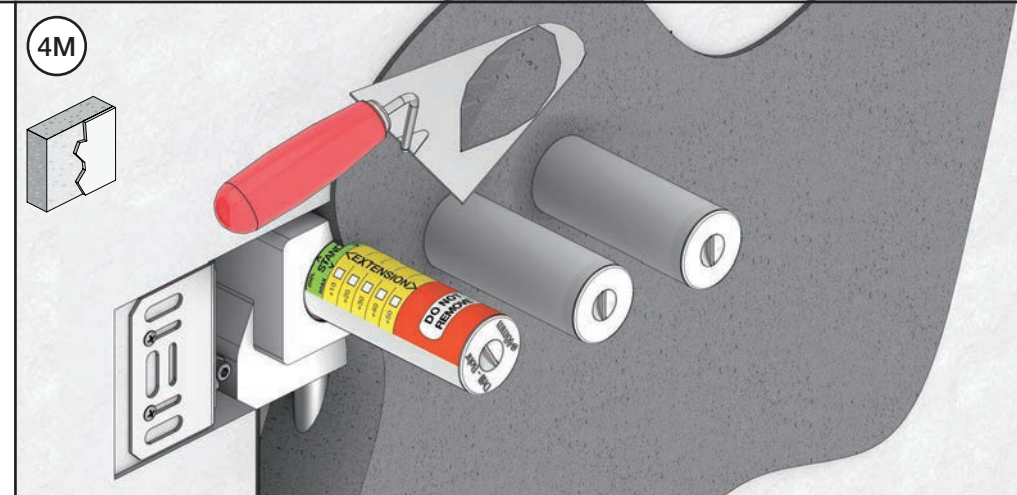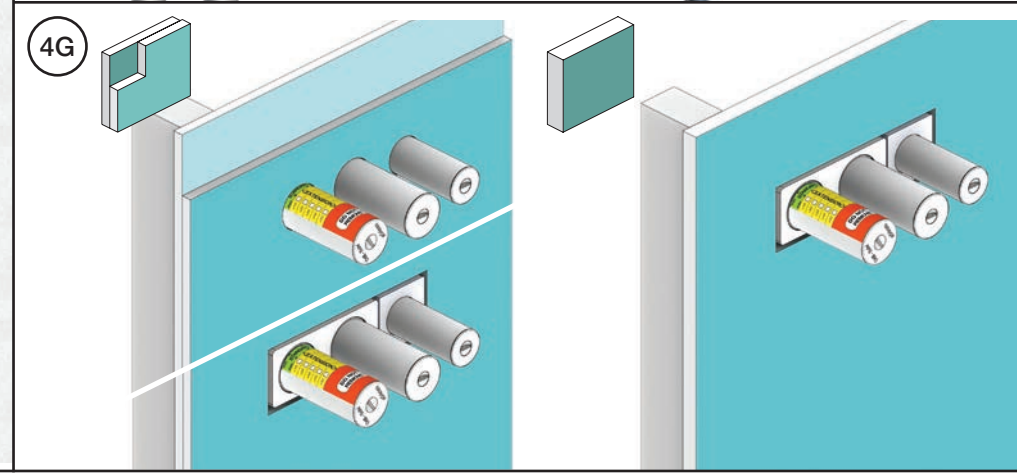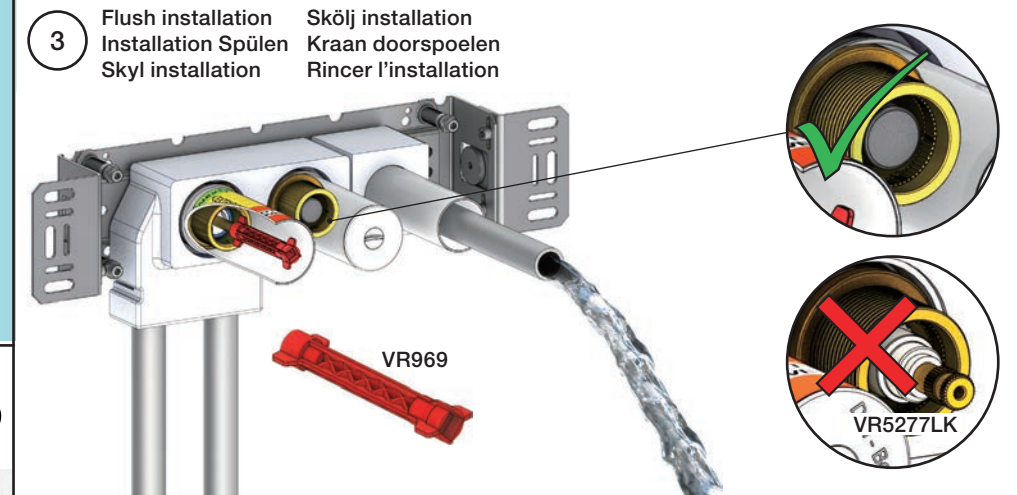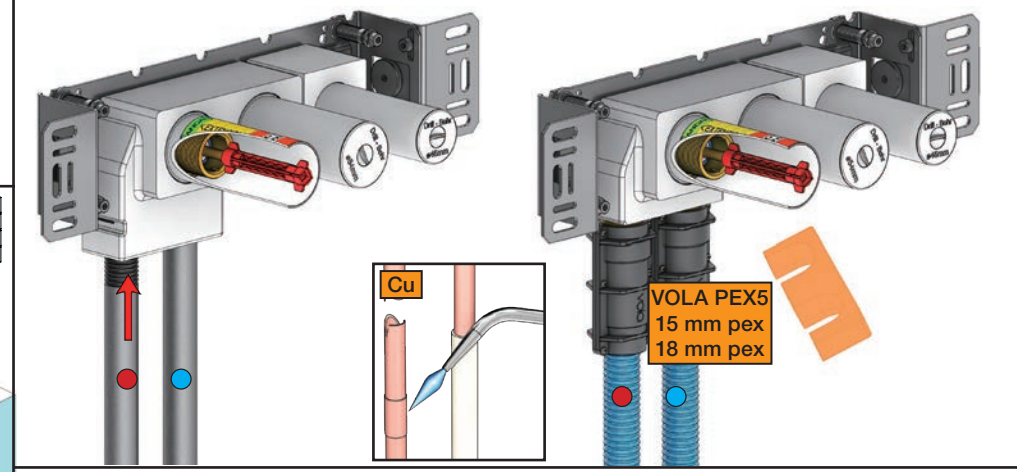



Do not cut the membrane
Die Membran nicht schneiden
Skær ikke membranen
Skär inte membranet
Snij het membraan niet door
Ne coupez pas la membrane
No cortar la membrana

NR.51:


1

NR.52+64:


2

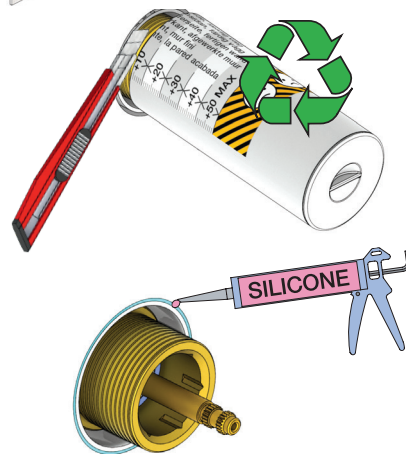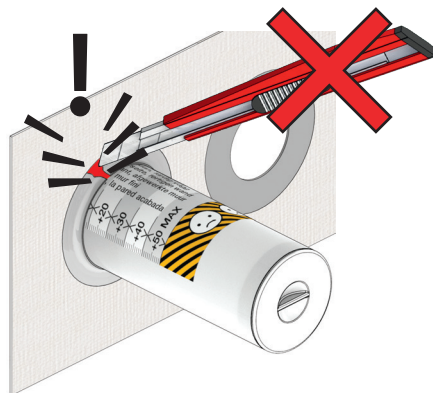

NR 51




NR 51 - 1



VR2279


VR2279B

VR2279C




		A
VR2279	16 mm	16 - 22 mm
VR2279B	12 mm	12 - 18 mm
VR2279C	8 mm	8 - 15 mm


NR 51 - 2

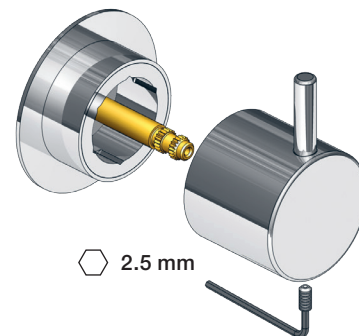


NR 52



NR 52 - 1



NR 52 - 2

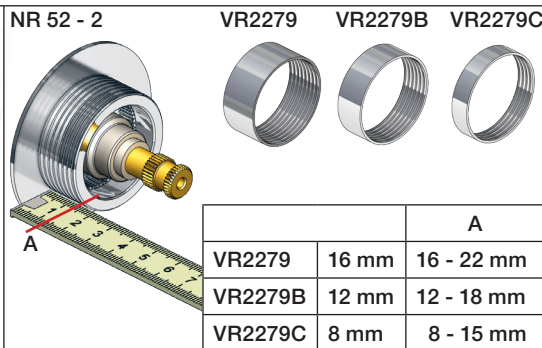


NR 52 - 3

Anti scald settings
Verbrühschutz
Skoldningssikring
Skållnings skydd
Broeien verzekeringen
Prévention des brûlures




38°C
100°F


NR 52 - 4

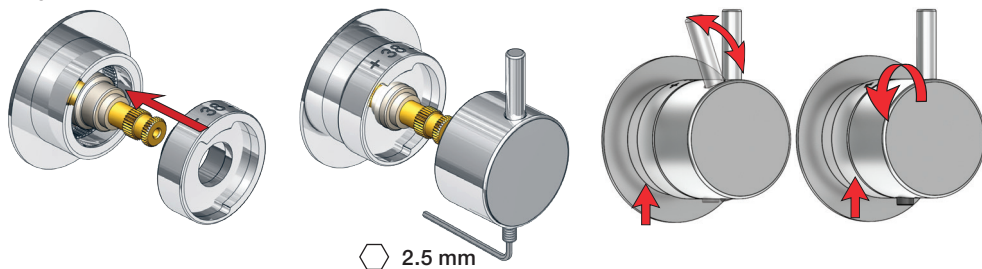


NR 64





NR 64 - 1




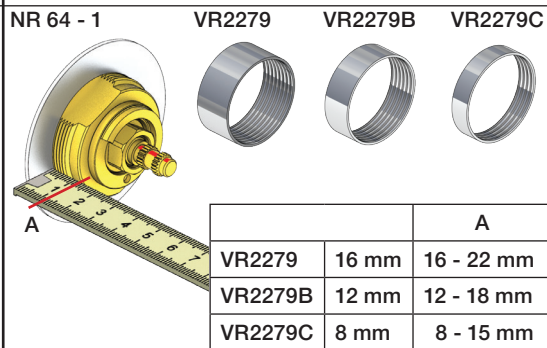


NR 64 - 2

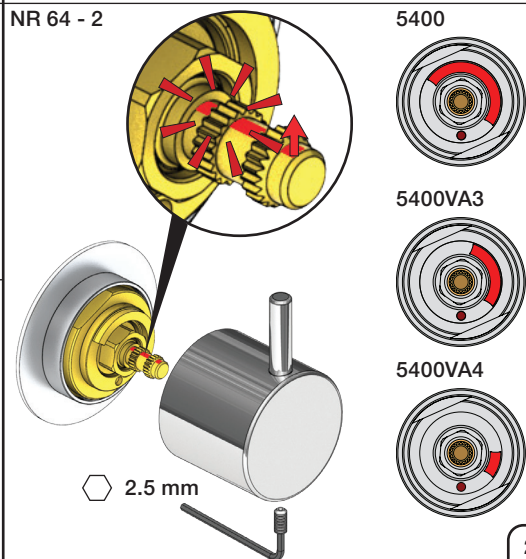

[illegible]

NR51:	VR5251, VR2279+B+C, VR2A
NR52:	VR2A, VR5252, VR5253, VR5255, VR5256, VR2279+B+C, VR3113, VR2A
NR64:	VR5251, VR2279+B+C, VR2A
VR3113:	VR3109, VR3110, VR5255
VR5250+:	VR5248+, VR5249+, VR5257, VR5258, VR5259, VR5260
VR5257+:	VR5257+, VR5259+
VR5258+:	VR5258+, VR5260+
VR5268+:	2xVR2C, VR1902, VR5268, VR5271+
VR5410+:	2xVR2C, VR5270+, VR5271+

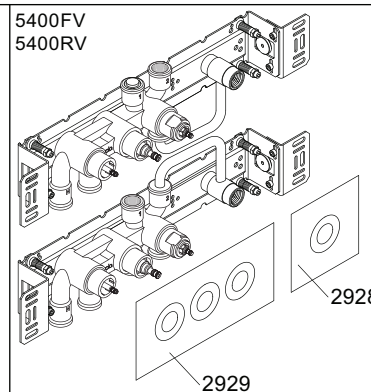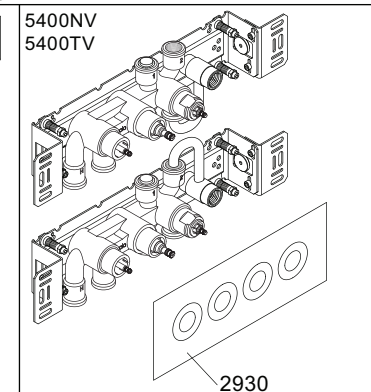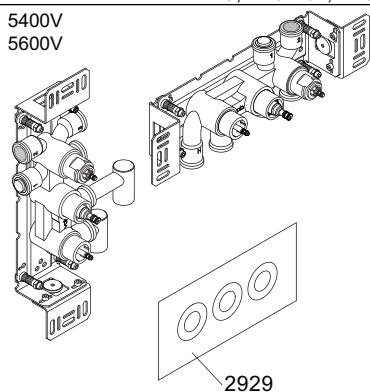

5003B

3x2001

5004B

3x2001, 001

5004L

3x2001, 001



VOLA 5400V
5400FV, 5400NV
5400RV, 5400TV
5600V

Date
May 22

Rev. 5

Sheet
SB 10.54