


VOLA 070, 070R, 070-HT2


Fitting instruction  
Montageanleitung  
Monteringsvejledning  
Monteringsvægledning  
Montage hanleiding  
Manuel de montage





| Data                                                                              | Bar:                 | 1        | 2         | 3         | 4         | 5        |
|-----------------------------------------------------------------------------------|----------------------|----------|-----------|-----------|-----------|----------|
| 070/070R                                                                          | (l/min)<br>(Gal/min) | 9<br>2.5 | 9<br>2.5  | 9<br>2.5  | 9<br>2.5  | 9<br>2.5 |
| 070-HT2                                                                           | (l/min)<br>(Gal/min) | 9<br>2.5 | 12<br>3.2 | 15<br>4.0 | 17<br>4.5 | 19<br>5  |
|  | Max. 65°C. 150°F     |          |           |           |           |          |

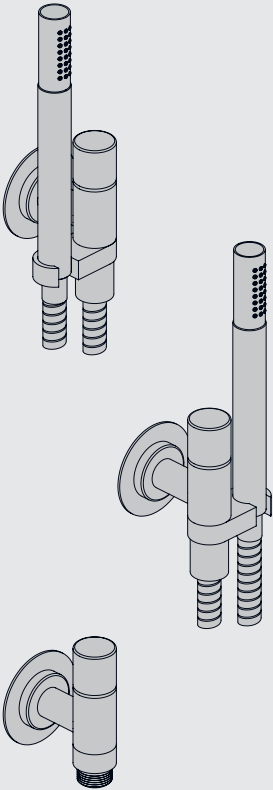



VR161:  
VR161K: 7 l/min - 1.8 Gal/min (Cal Green)

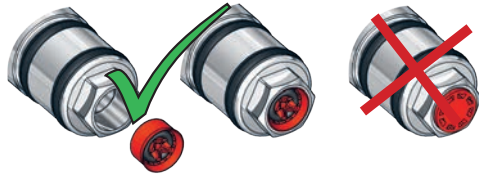


070


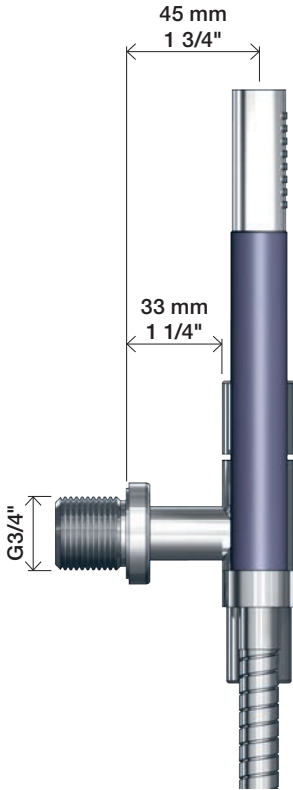
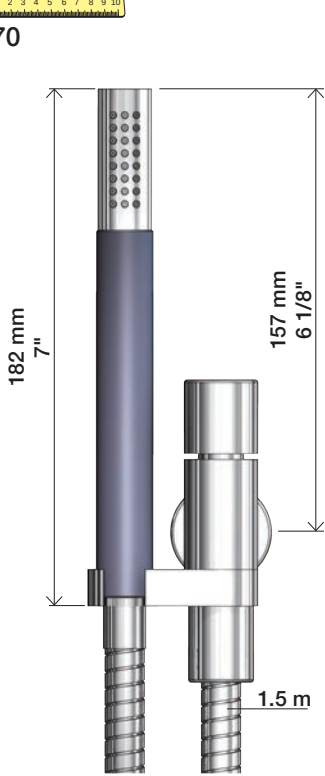


070R

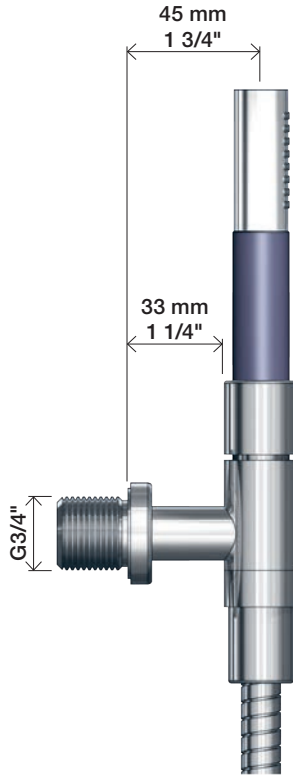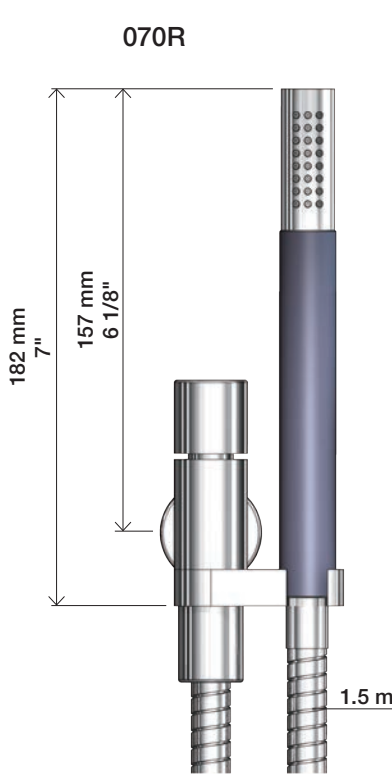

070-HT2



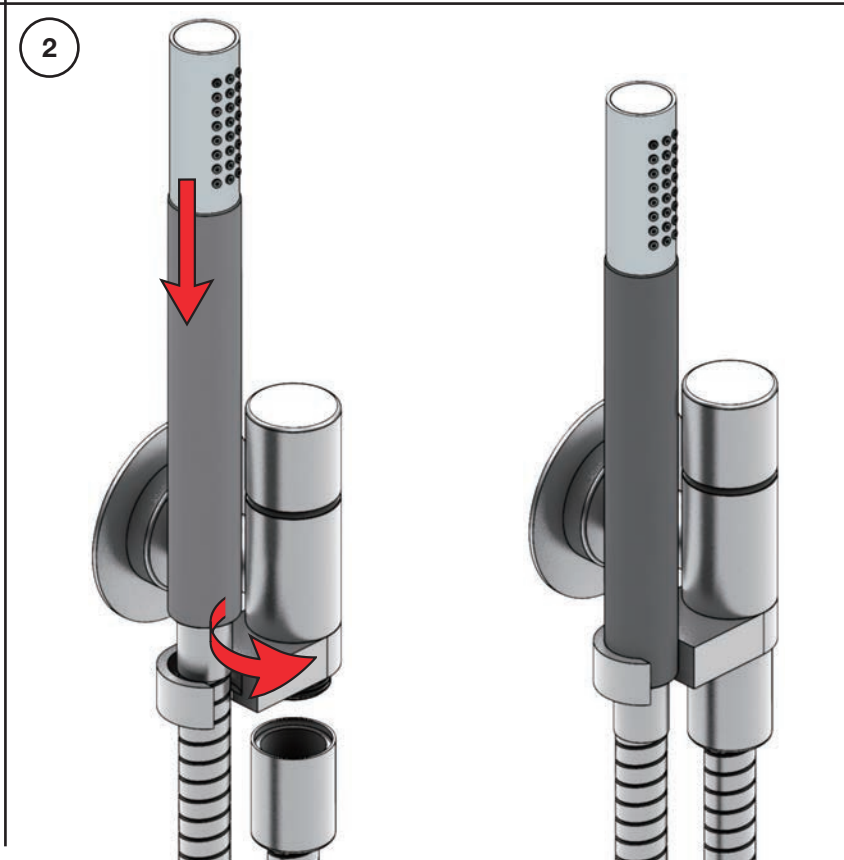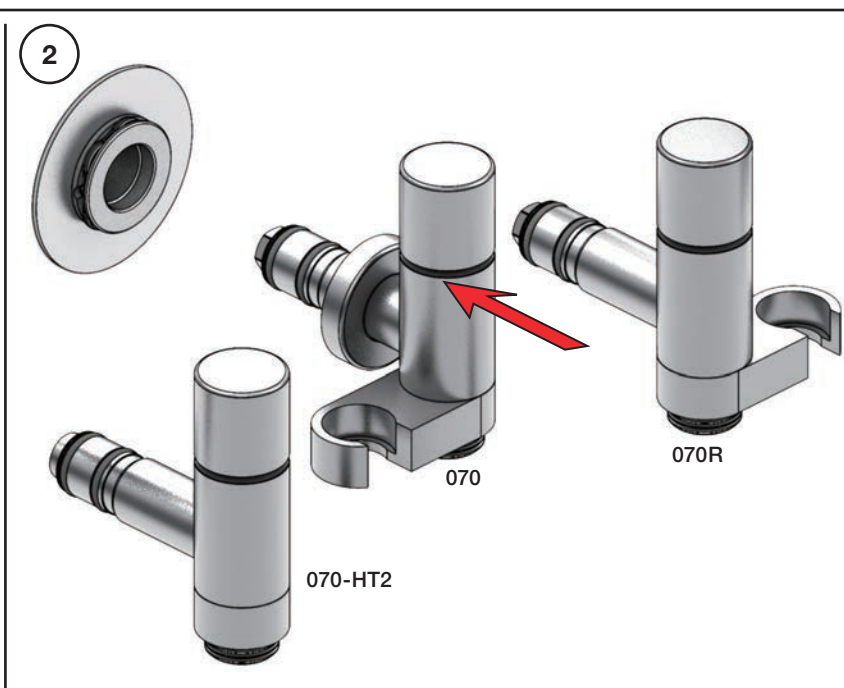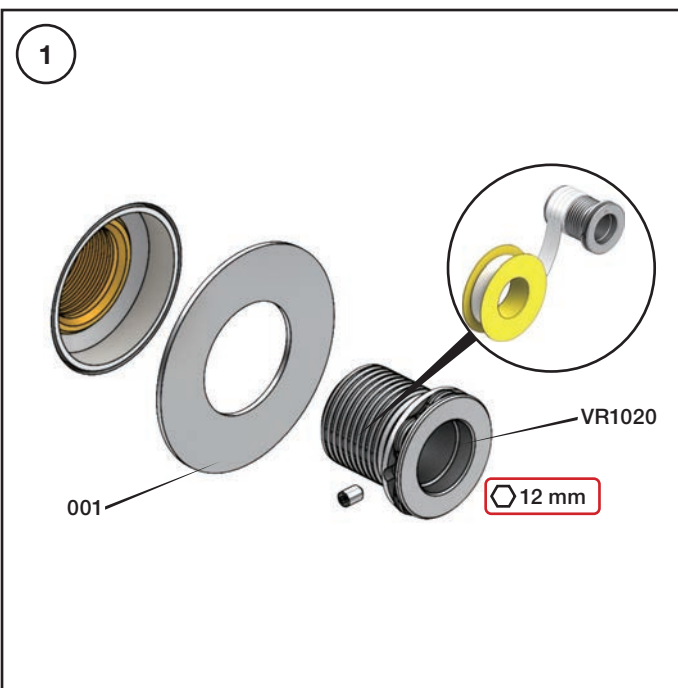


Extension  
Verlängerung


Forlængerdele  
Förlängning

Verlengstukken  
Modification

T Min. 3 mm  
Max. 65 mm



Y Min. 48 mm  
Max. 110 mm

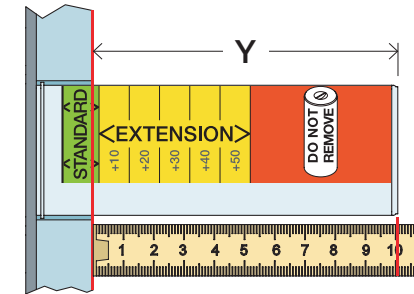

| T          | Y           | VR2019 |
|------------|-------------|--------|
| 3 - 15 mm  | 110 - 98 mm | Std.   |
| 15 - 25 mm | 98 - 88 mm  | +10    |
| 25 - 35 mm | 88 - 78 mm  | +20    |
| 35 - 45 mm | 78 - 68 mm  | +30    |
| 45 - 55 mm | 68 - 58 mm  | +40    |
| 55 - 65 mm | 58 - 48 mm  | +50    |

VR2019+

