





voilà



5 705230 287317

 vola.com 	L	L1	L2	H	H1	D
5400DV	377 mm 14 3/4"	260 mm 10"	268 mm 10"	95 mm 3 3/4"	186mm 7 3/8"	70 mm 2 3/4"
5100, 5200V, 5300, 5400V, 5600V	475 mm 19 3/4"	355 mm 14"	367 mm 14 1/2"			
5100X, 5400NV, 5400TV	552 mm 21 3/4"	435 mm 17"	447 mm 17 5/8"			
5400FV, 5400RV	630 mm 25 1/2"	514 mm 20 3/8"	522 mm 20 1/2"			

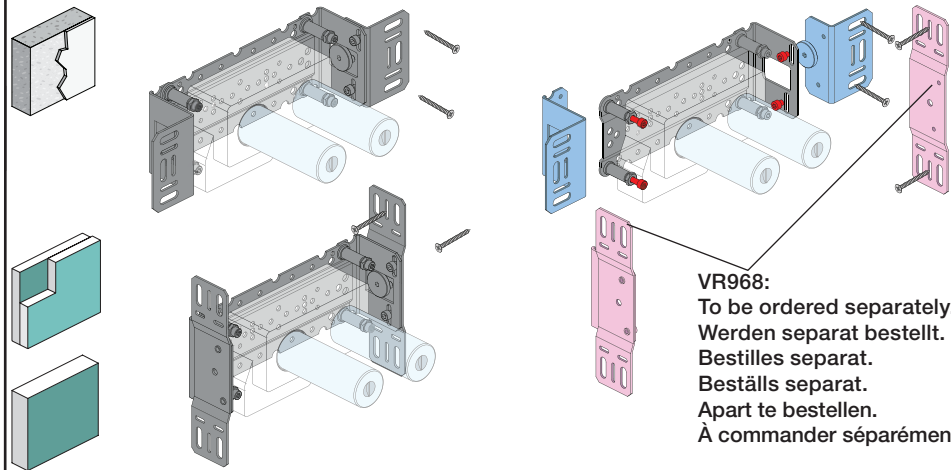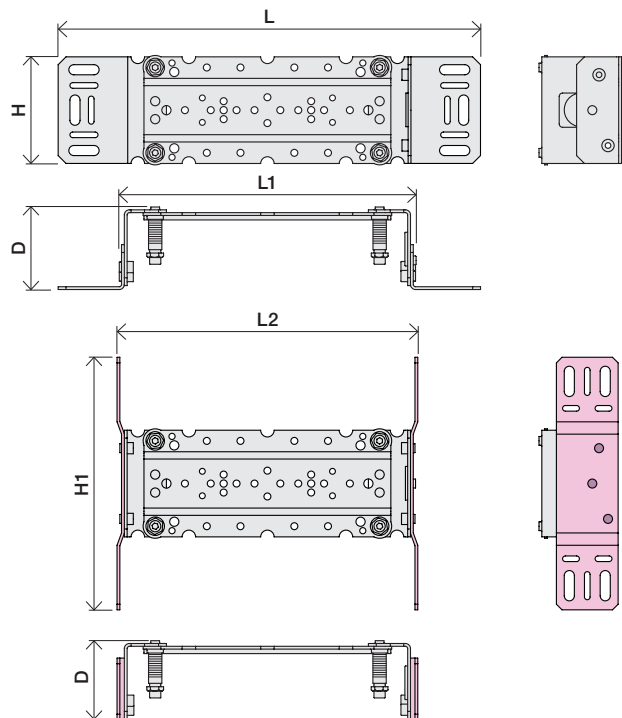

VR968:
To be ordered separately.
Werden separat bestellt.
Bestilles separat.
Beställs separat.
Apart te bestellen.
À commander séparément.

Max. 65°C, 150°F

5100/5200V/5300:


5400/5600A3:

5400/5600:  - 


5400/5600A4: -

5400 5600	5400A3 5600A3	5400A4 5600A4							
									
Out 2	Out 1	Out 1	32/(8.5)	16/(4.2)	-	-	-	-	-
Out 3	Out 2	Out 2	-		32/(8.5)	16/(4.2)	-	-	-
-	Out 3	Out 3	-	-	-		32/(8.5)	16/(4.2)	-
-	-	Out 4	-	-	-	-	32/(8.5)		



**!DO NOT!
!REMOVE!**



PEX1

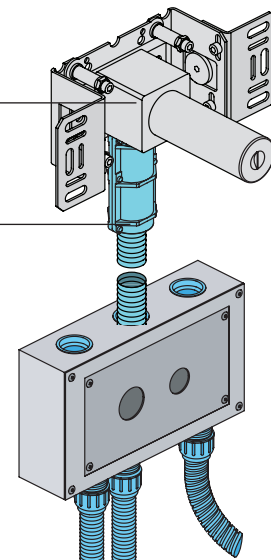


Y Min. 48 mm
Max. 110 mm

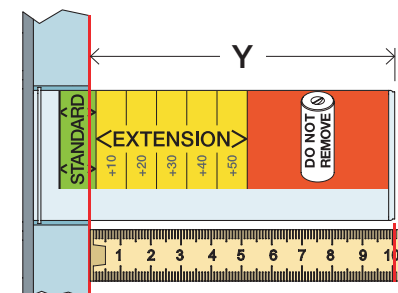




	T	Y	VR5250/VR5410/VR2019
	3 - 15 mm	110 - 98 mm	Std.
	15 - 25 mm	98 - 88 mm	+10
	25 - 35 mm	88 - 78 mm	+20
	35 - 45 mm	78 - 68 mm	+30
	45 - 55 mm	68 - 58 mm	+40
	55 - 65 mm	58 - 48 mm	+50

Montering af forlængerdele
Montering av förlängning

VR2019+, VR2119+


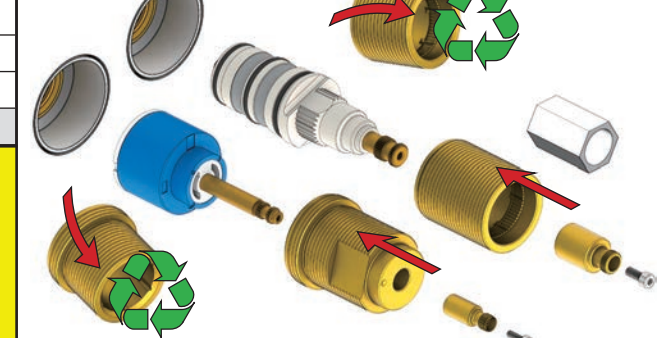


5400:

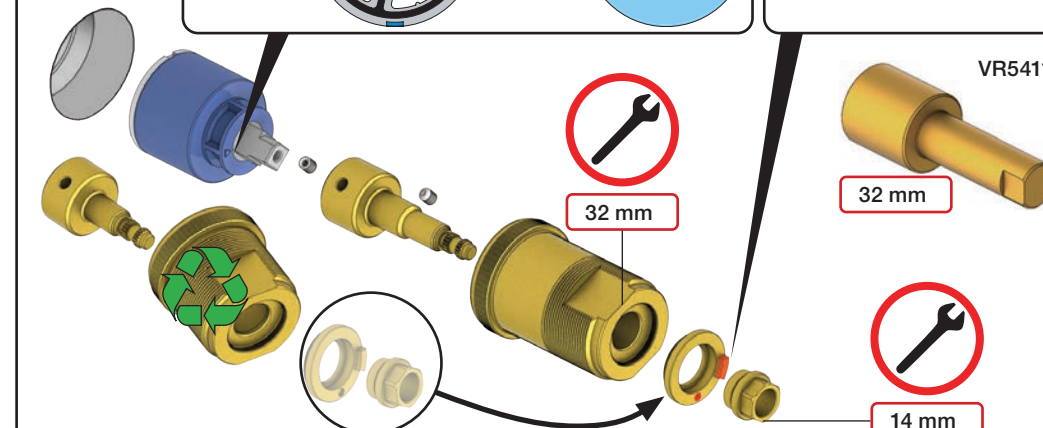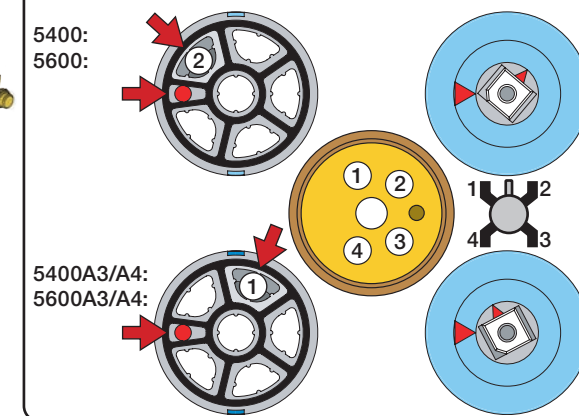



X₅₂ - 0 mm

X_{-15 - 0 mm}



	X	VR5250/VR5410/VR2019
	37 - 49 mm	Std.
	27 - 37 mm	+10
	17 - 27 mm	+20
	7 - 17 mm	+30
	-3 - 7 mm	+40
	-13 - -3 mm	+50

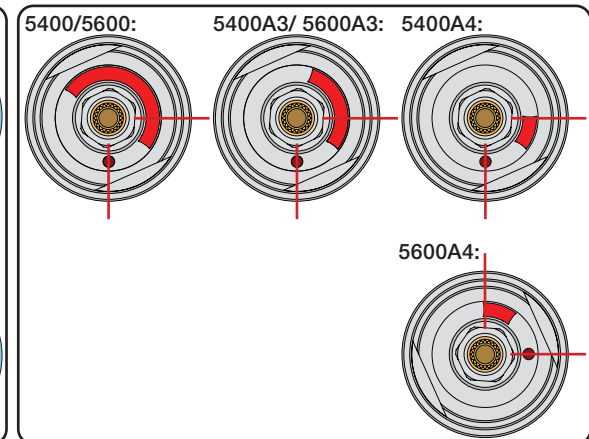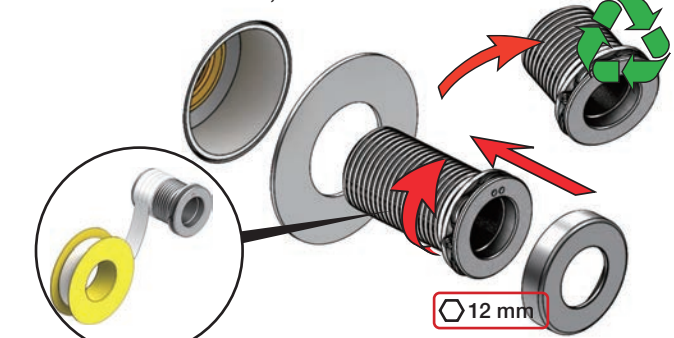[illegible]

32 mm

14 mm



2x13 mm Lightweight wall
Leichtwand
Let væg

Lätta konstruktion
Holle wandconstructie
Construction légère



1x15 mm
1x18 mm
1x20 mm

Lightweight wall
Leichtwand
Let væg

Lätta konstruktion
Holle wandconstructie
Construction légère

2x13 mm



Masonry
Mauerwerk
Murværk

Murverk
Massieve wand
Mur Plein





2

Test Pressure
Prüfdruck
testtryk
Test tryck
Test druk
test de pression

Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera lokala föreskrifter.
Nazitten lokale regelgeving.
Vérifiez la législation locale.

! Water - Wasser - Vand - Vatten - Water - L'eau
! MAX 1 Minute - Minut - Minuut !

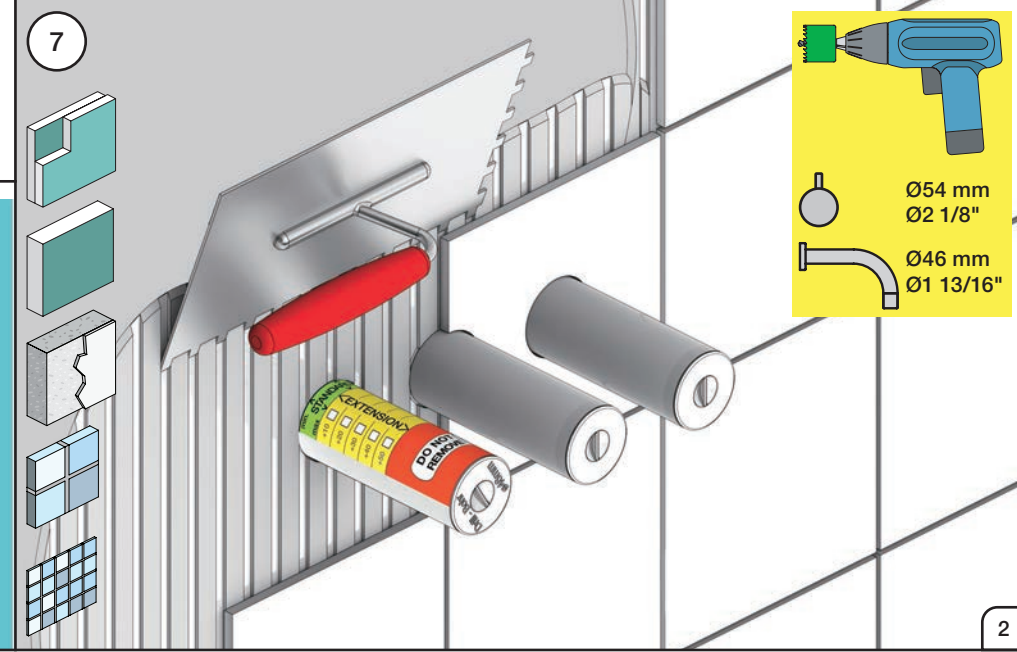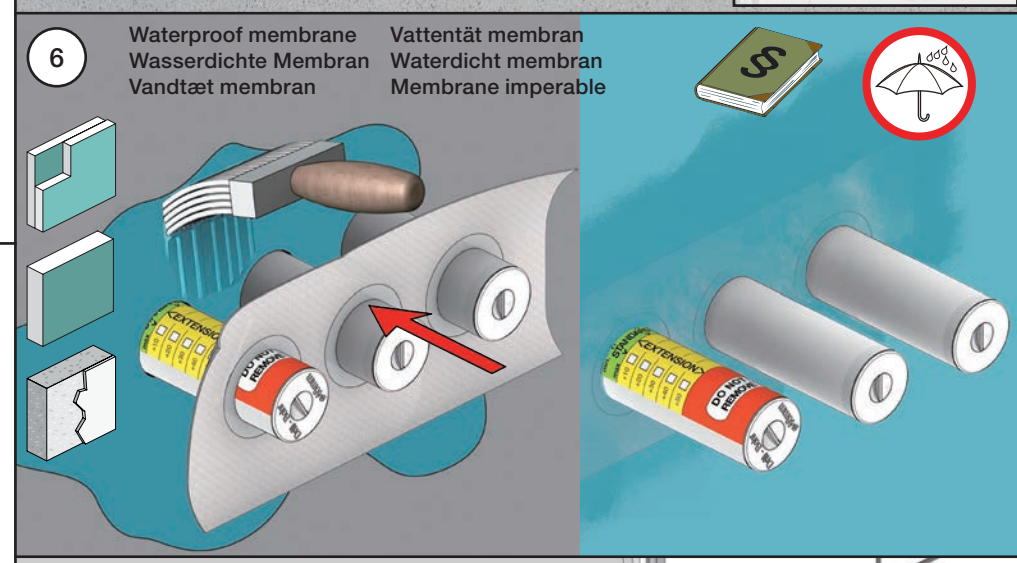

5400VA4

The main exploded view shows the following components:

- 5277LK: Main body
- 1902: Mounting bracket
- 968: Mounting plate
- 5268, 5271+, 5410, 2C: Valve actuator assembly
- 5250, 5249, 5248, 5270 NV32, 2279/B/C: Seals and O-rings
- 5246, 5411, 969, 5269: Internal components
- 972 x8: Screws
- Nr.51, Nr.52, Nr.64: End caps/seals
- 5274, 5255, 5262, 5256: Additional seals/O-rings
- 3110, 3109: Small pins/bushes
- 2279B, 2279C: Alternative seal options
- 22: L-shaped pin

5250+ 5248+ 5257+ 5249+ 5258+ 5260+ 5259+	5410+ 5271+ 5270+ 2C	5268+ 1902 2C 5271+	2A* Color VR2A-Steel: Standard VR2A-F60: F17-F27-F60 VR2A-F63: F63-F64 VR2A-F65: F19-F65-F70
--	--------------------------------------	-------------------------------------	---

NR51: VR5251, VR2279+B+C, VR2A
NR52: VR2A, VR5252, VR5253, VR5255, VR5256, VR2279+B+C, VR3113, VR2A
NR64: VR5251, VR2279+B+C, VR2A
VR3113: VR3109, VR3110, VR5255
VR5250+: VR5248+, VR5249+, VR5257, VR5258, VR5259, VR5260
VR5257+: VR5257+, VR5259+
VR5258+: VR5258+, VR5260+
VR5268+: 2xVR2C, VR1902, VR5268, VR5271+
VR5410+: 2xVR2C, VR5270+, VR5271+

Model	Mounting Plate	Bracket	Pin
5400VA4 5600VA4	2929	5003B	3x2001
5400NVA4 5400TVA4	2930	5004B	3x2001, 001
5400FVA4 5400RVA4	2961	5004L	3x2001, 001
5400DVA4	2934		2001

Lunavej 2
DK-8700 Horsens
Tlf : + 45 7023 5500
sales@vola.com
www.vola.com

VOLA 5400VA4

5400FVA4, 5400NVA4
5400RVA4, 5400TVA4
5600VA4

Date
Apr. 21

Rev.
6

Sheet
SB 10.54