

VOLA 500, 590, 500T1
VOLA 2500
VOLA SC1, SC3, SC5, SC7, SC9, SC10, SC12

Fitting instruction
 Montageanleitung
 Monteringsvejledning
 Monteringsvægledning
 Montage hanleiding
 Manuel de montage



GODKENDT
TIL DRIKKEVAND

04/00027
 04/00038



www.vola.com

500 - 2500_V0_40998137
 02-10-2023







5 705230 492964

Data, 3 Bar /43.5 Psi:

	l/min.	Gal/min.
500:	14,5	3.8
590:	9,0	2.4
500-T1:	11,0	2.9
2500:	18,7	4.9
SC1:	18,7	4.9
SC5, 7:	18,0	4.8
SC9:	11,0	2.9

Max. 65°C, 150°F


500/2500:

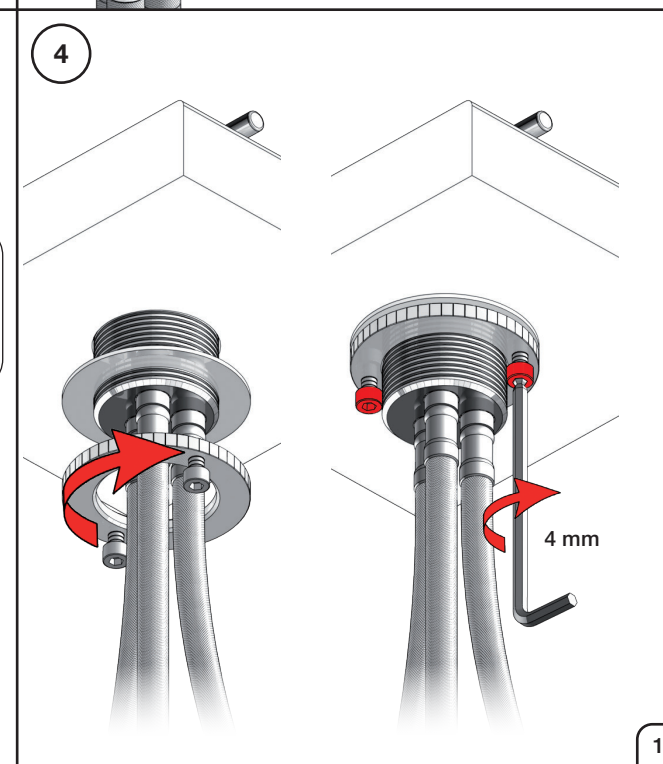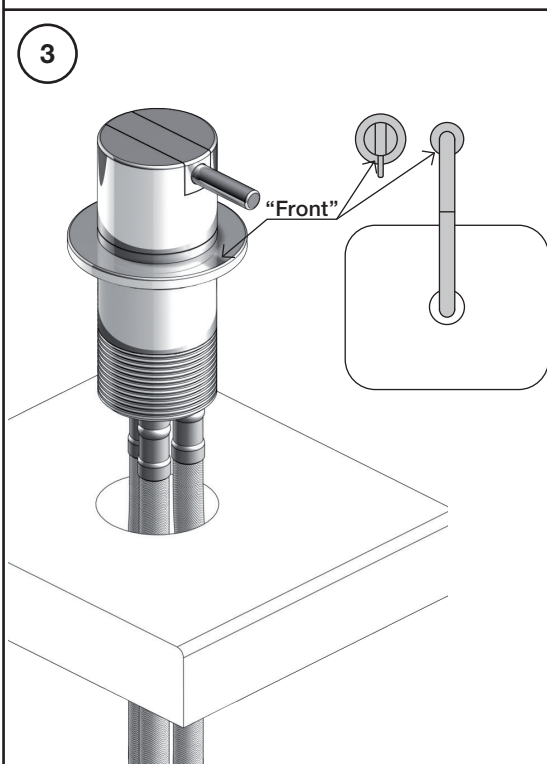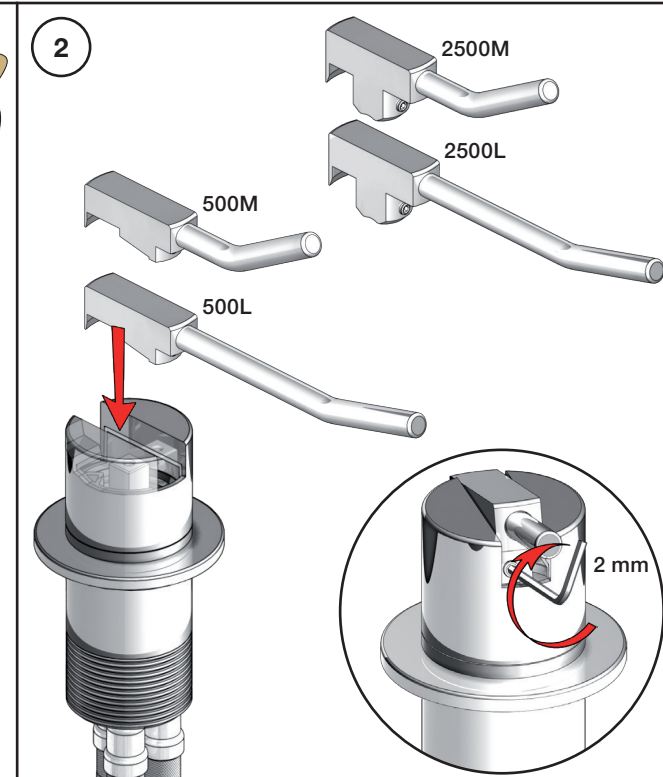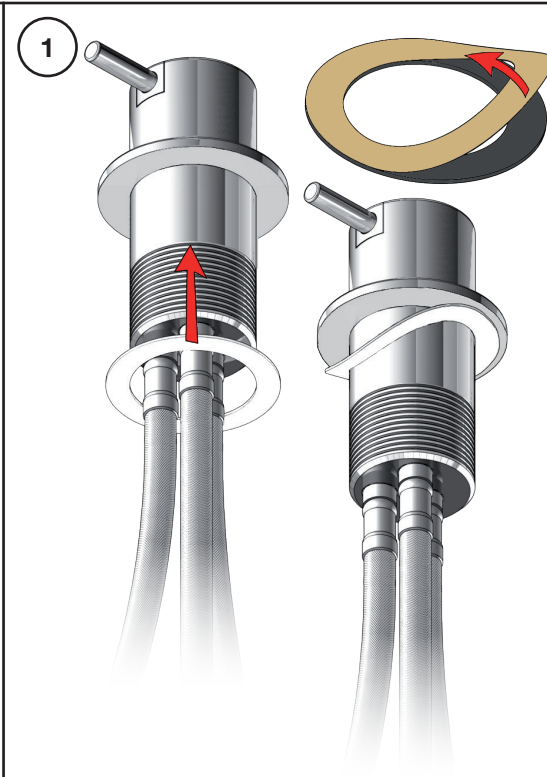



5




6

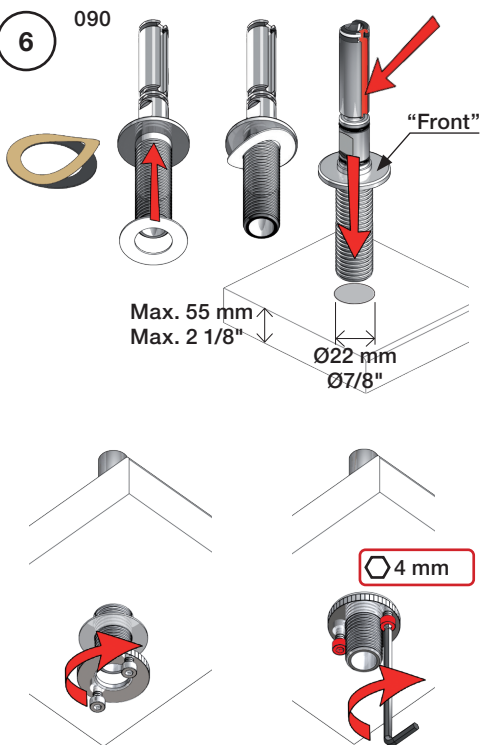


6A

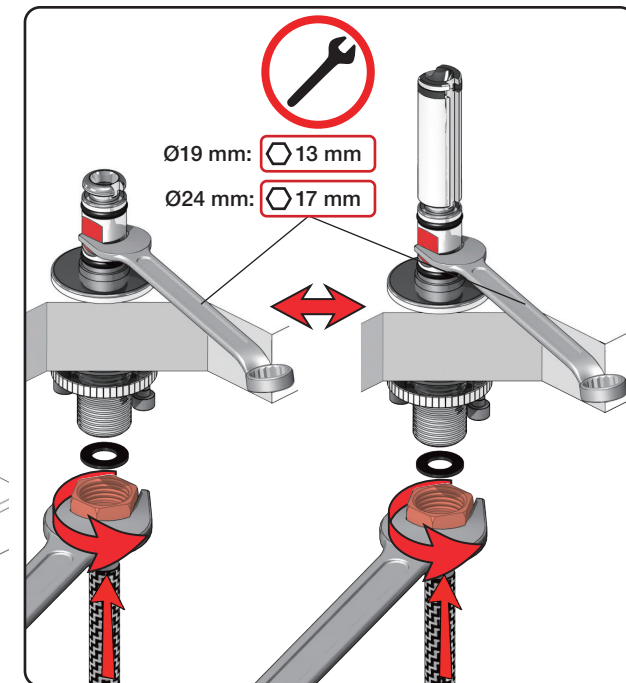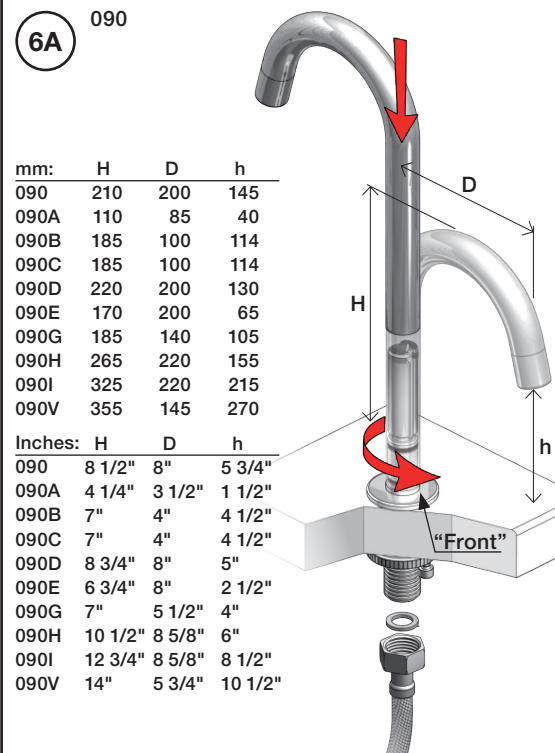


6B

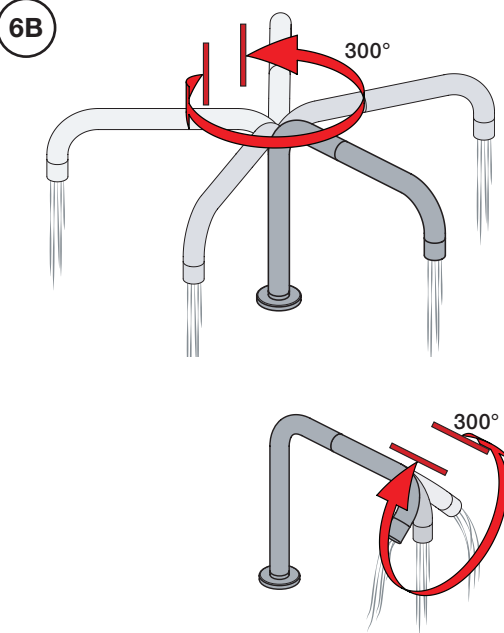

7

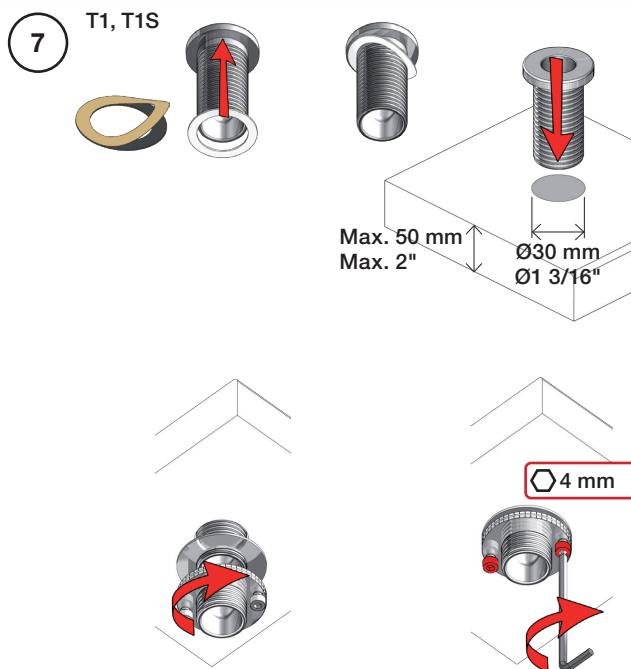


7A

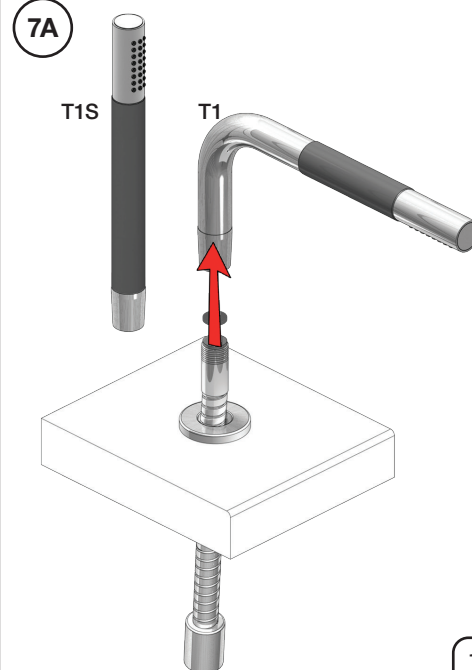


1


2500:

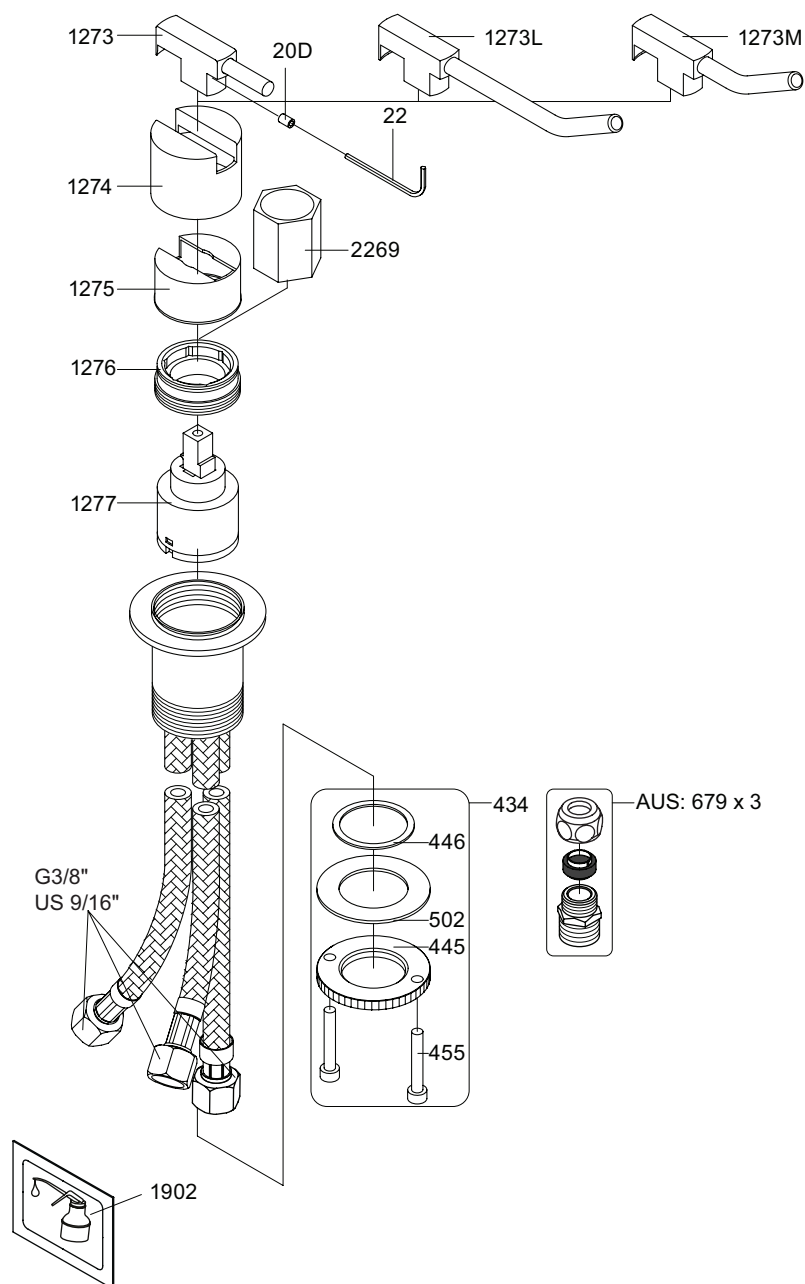

500: Ø10
500US: Ø3/8"



VR1277K: VR22, VR2269, VR1277
VR434: 2xVR455, VR445, VR446, VR502
NR.11: VR20, VR22, VR1273, VR1274, VR1275



vola
Lunavej 2
DK-8700 Horsens
Tlf : + 45 7023 5500
sales@vola.com
www.vola.com

VOLA 2500, SC1

Date
Jan. 23

Rev.
4

Sheet
SB 10.15