VOLA 5471-051	1/5
	Date:
	Client:

Project:
























VOLA 5471-051 2/5

5471-051

³/₄" thermostatic mixer.5471-051UP = Thermostatic mixer 5400FV, 200M.5471-051AP = Handle NR51, handle NR52, handle NR64G, hand shower and hand shower holder with non-return valve 070, hose 1500 mm, wall mounted head shower 050, 3 pcs. 60 mm circular flanges 2001,

Flow

	Bar:	1.0	2.0	3.0	4.0	5.0
070 ¹⁾	(l/min)	5.2	7.3	9.0	9.0	9.0
050 ²⁾	(l/min)	13.3	18.8	23.0	26.6	29.7

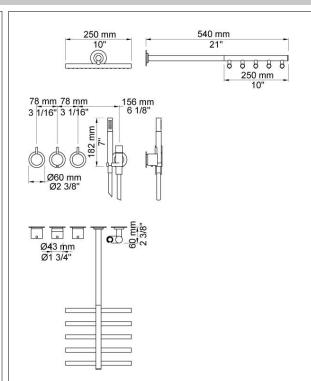

Available in colors


	Color 20, Brushed chrome		
Color 02, Grey	Color 21, Carmine red		
Color 04, Light blue	Color 25, Pink		
Color 05, Orange	Color 27, Matt black		
Color 06, Light green	Color 28, Matt white		
Color 08, Yellow	Color 40, Brushed stainless steel		
Color 09, Dark grey	Color 60, Black		
Color 12, Mocca	Color 61, Brushed black		
Color 14, Bright red	Color 63, Copper		
Color 15, Dark blue	Color 64, Brushed Copper		
Color 16, Polished chrome	Color 65, Gold		
Color 17, Gloss black	Color 68, Silver		
Color 18, White	Color 70, Brushed Gold		
Color 19, Natural brass			

¹⁾ USA: Flow restricted to 1.8 gpm (7.0 l/min) ²⁾ USA: Flow restricted to 1.8 gpm (7.0 l/min)

VOLA 5471-051 3/5




001 60 mm circular flange. Hole Ø30 mm.






050Head shower, wall-mounted.Fits 200M in an existing installation if it is from thenew generation of VOLA build-in fittings after 1995.

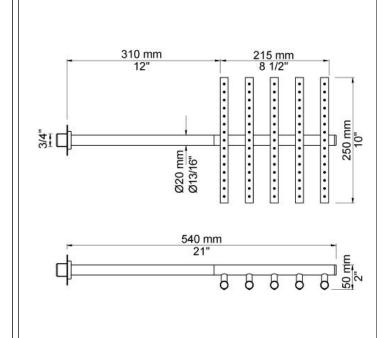



070 Hand shower, hand shower holder and hose with non-return valve.

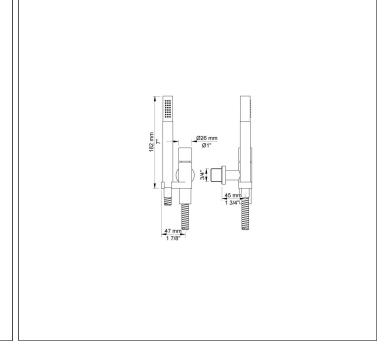


VOLA 5471-051 4/5



2001

60 mm circular flange. Hole Ø39 mm.






200M

Separate outlet socket.


 $\frac{1}{2}$ " connection to copper, steel, iron or pex pipe work.

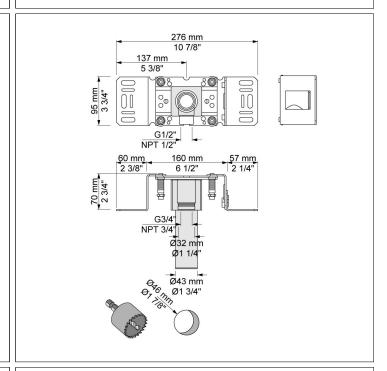



5400F

Thermostatic mixer with diverter, fixed outlet socket and one separate outlet socket, 200M. ¾" connection to copper, steel, iron or pex pipe work.

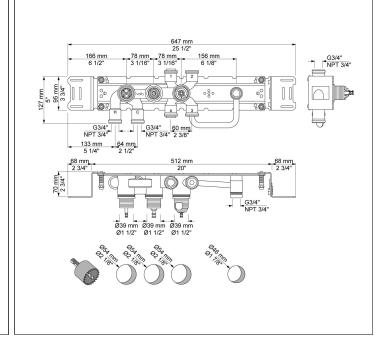

VOLA 5471-051 5/5

