
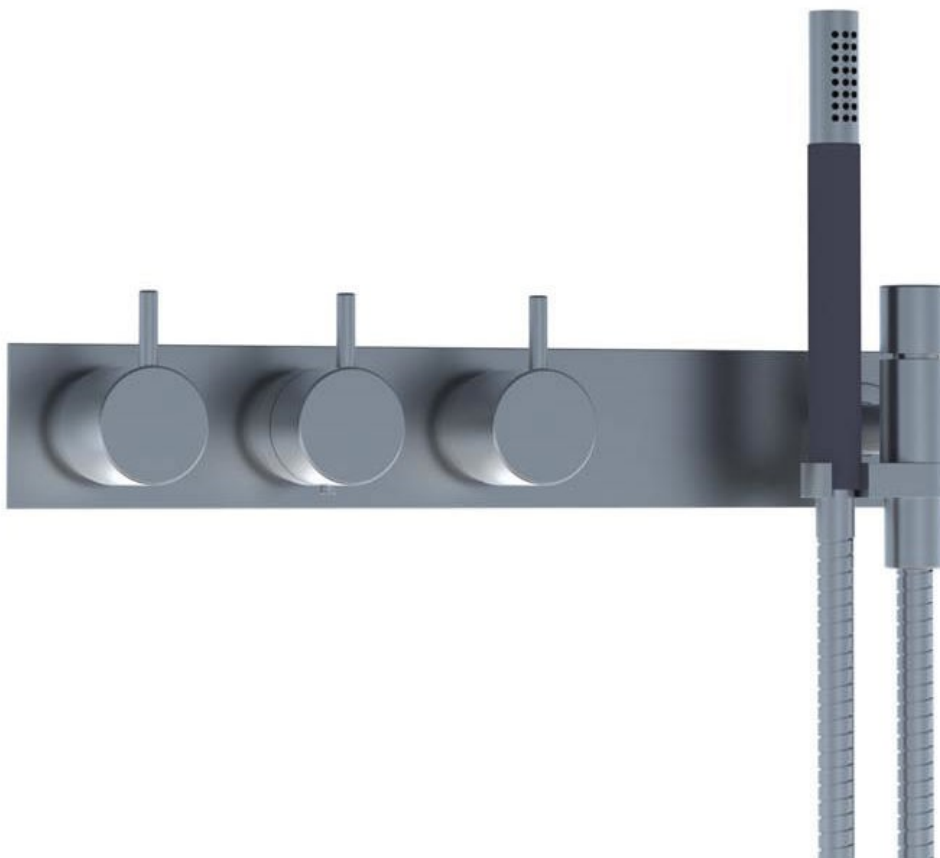


	Date:
	Client:
	Project:

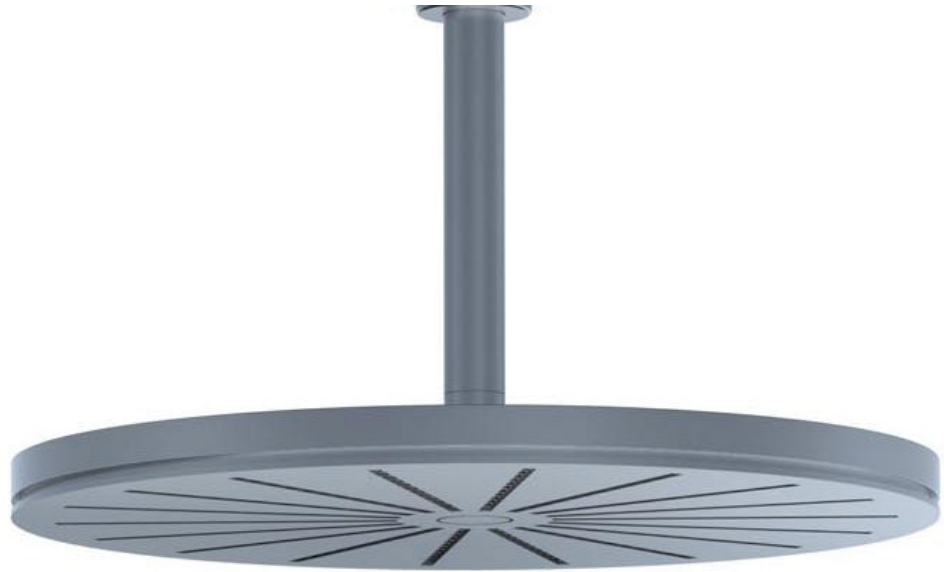

5474L-061A

¾" thermostatic mixer.

5474L-061AUP = Thermostatic mixer 5400FV, 200M.


5474L-061AAP = Handle NR51, handle NR52, handle NR64G, hand shower and hand shower holder with non-return valve 070, ceiling-mounted head shower 060A, four-hole plate 60 x 387 mm 5004L.

Flow


	Bar:	1.0	2.0	3.0	4.0	5.0
070 ¹⁾	(l/min)	5.2	7.3	9.0	9.0	9.0
060A ²⁾	(l/min)	12.7	18.0	22.0	25.4	28.4

¹⁾ USA: Flow restricted to 1.8 gpm (7.0 l/min)

²⁾ USA: Flow restricted to 1.8 gpm (7.0 l/min)

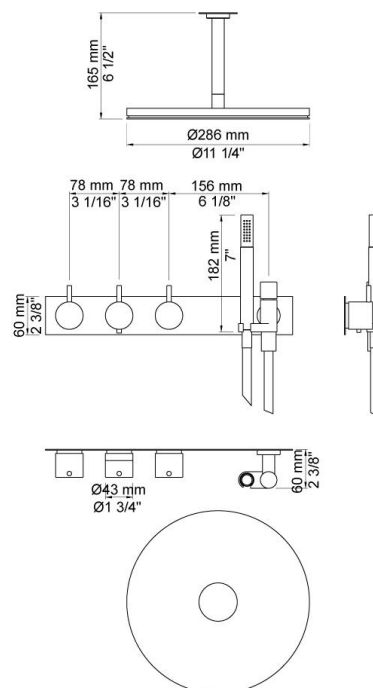**Available in colors**

Color 02, Grey	Color 21, Carmine red
Color 04, Light blue	Color 25, Pink
Color 05, Orange	Color 27, Matt black
Color 06, Light green	Color 28, Matt white
Color 08, Yellow	Color 40, Brushed stainless steel
Color 09, Dark grey	Color 60, Black
Color 12, Mocca	Color 61, Brushed black
Color 14, Bright red	Color 62, Deep black
Color 15, Dark blue	Color 63, Copper
Color 16, Polished chrome	Color 64, Brushed Copper
Color 17, Gloss black	Color 65, Gold
Color 18, White	Color 68, Silver
Color 19, Natural brass	Color 70, Brushed Gold
Color 20, Brushed chrome	

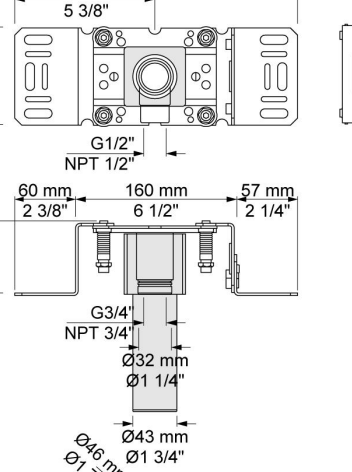

Technical drawing of the G1/2" NPT 1/2" fitting, showing dimensions in mm and inches.

Top View Dimensions:

- Overall width: 276 mm (10 7/8")
- Distance between mounting holes: 137 mm (5 3/8")
- Height: 95 mm (3 3/4")

Side View Dimensions:

- Overall height: 70 mm (2 3/4")
- Distance from mounting hole to centerline: 60 mm (2 3/8")
- Distance from centerline to mounting hole: 160 mm (6 1/2")
- Distance from centerline to end of fitting: 57 mm (2 1/4")

Thread and Port Dimensions:



- Thread: G1/2" NPT 1/2"
- Thread size: G3/4" NPT 3/4"
- Outer diameter of fitting: Ø32 mm
- Outer diameter of fitting: Ø1 1/4"
- Outer diameter of fitting: Ø43 mm
- Outer diameter of fitting: Ø1 3/4"
- Outer diameter of fitting: Ø46 mm
- Outer diameter of fitting: Ø1 7/8"

The drawing includes a side view of the fitting and a detail view of the mounting hole, showing a hole with a diameter of Ø46 mm (Ø1 7/8") and a depth of 70 mm (2 3/4").




5004L

Four-hole plate 60 x 387 mm (for 5400RV and 5400FV).
Holes Ø39, Ø39, Ø39 and Ø30 mm.

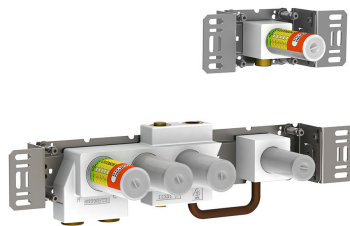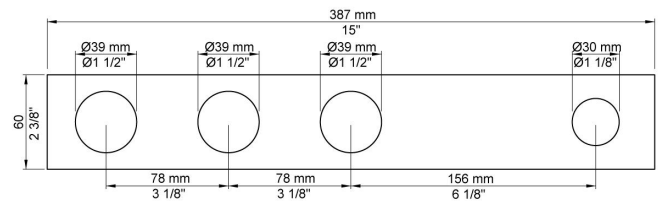


5400F

Thermostatic mixer with diverter, fixed outlet socket and one separate outlet socket, 200M.
3/4" connection to copper, steel, iron or pex pipe work.

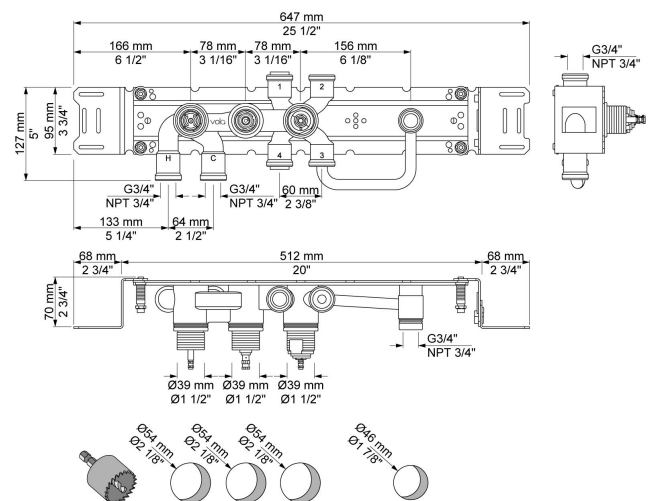
**NR51**

On/off handle for series 5000.

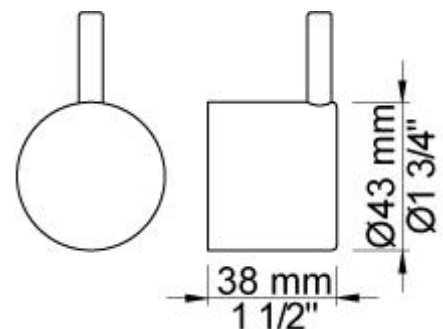

**NR52**

Thermostatic handle for series 5000.

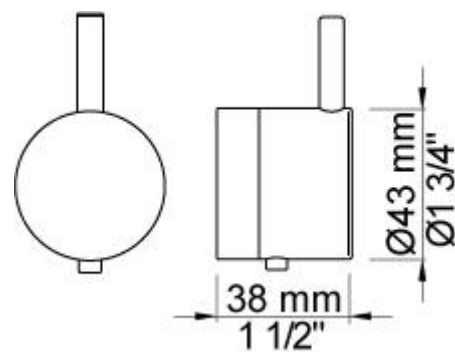**NR64G**

Diverter handle for 5400/5600.

With peg in the same colour as handle (Standard).

