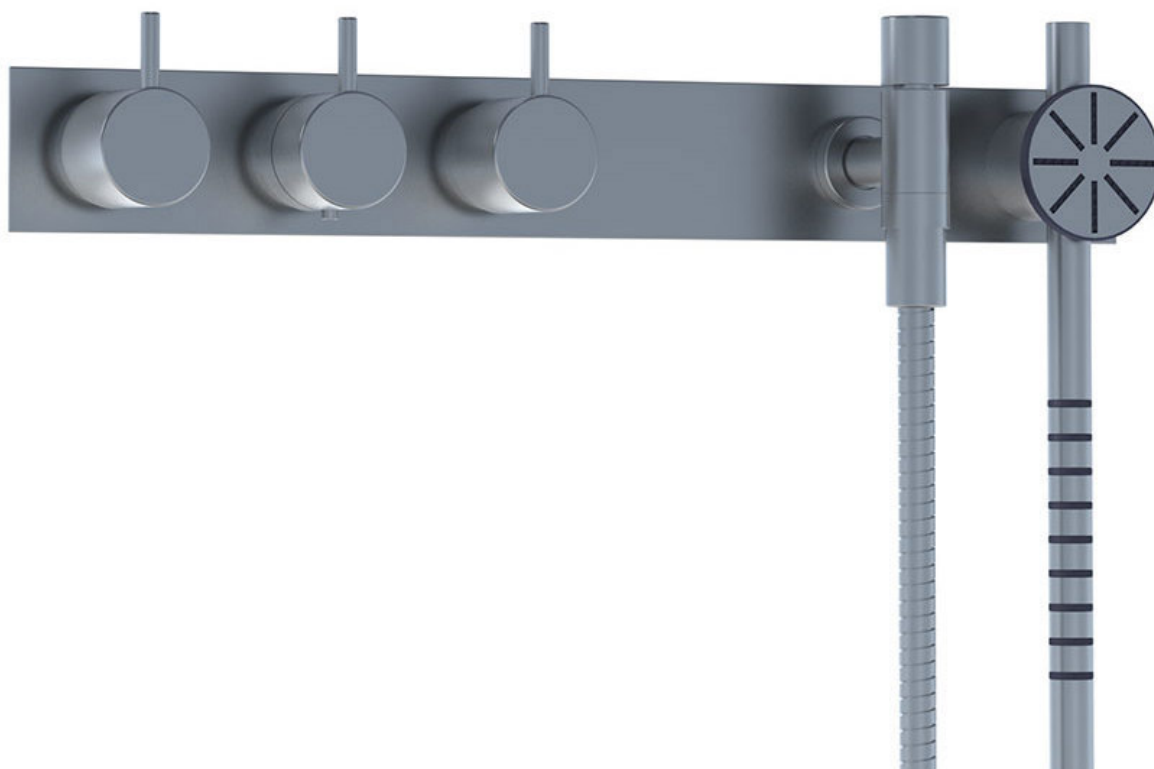


	Date:
	Client:
	Project:



5475SL-061A

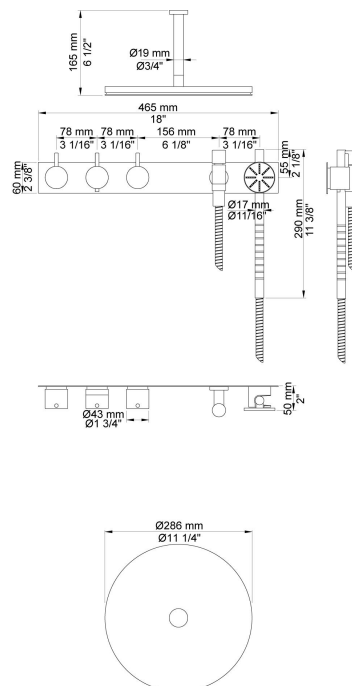
¾" thermostatic mixer. 5475SL-061AUP = Thermostatic mixer 5400FV, 200M. 5475SL-061AAP = Handle NR51, handle NR52, handle NR64G, hand shower and hand shower holder with non-return valve 070S, hose 1500 mm, ceiling-mounted head shower 060A, five-hole plate 60 x 465 mm 5005L.

Flow

	Bar:	1.0	2.0	3.0	4.0	5.0
060A ¹⁾	(l/min)	12.7	18.0	22.0	25.4	28.4
070S ²⁾	(l/min)	6.9	9.8	12.0	13.9	15.5

¹⁾ USA: Flow restricted to 1.8 gpm (7.0 l/min)

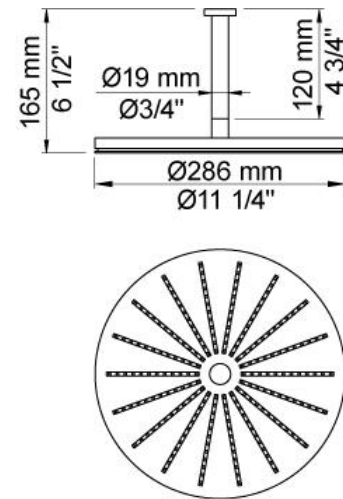
²⁾ USA: Flow restricted to 2 gpm (7.6 l/min)

**Available in colors**


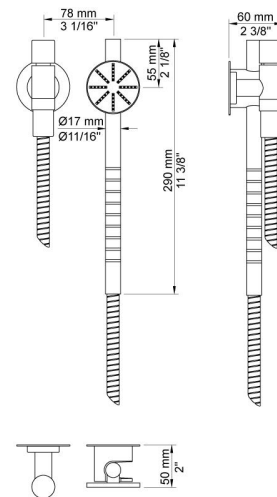
	Color 20, Brushed chrome
Color 02, Grey	Color 21, Carmine red
Color 04, Light blue	Color 25, Pink
Color 05, Orange	Color 27, Matt black
Color 06, Light green	Color 28, Matt white
Color 08, Yellow	Color 40, Brushed stainless steel
Color 09, Dark grey	Color 60, Black
Color 12, Mocca	Color 61, Brushed black
Color 14, Bright red	Color 63, Copper
Color 15, Dark blue	Color 64, Brushed Copper
Color 16, Polished chrome	Color 65, Gold
Color 17, Gloss black	Color 68, Silver
Color 18, White	Color 70, Brushed Gold
Color 19, Natural brass	

**060A**

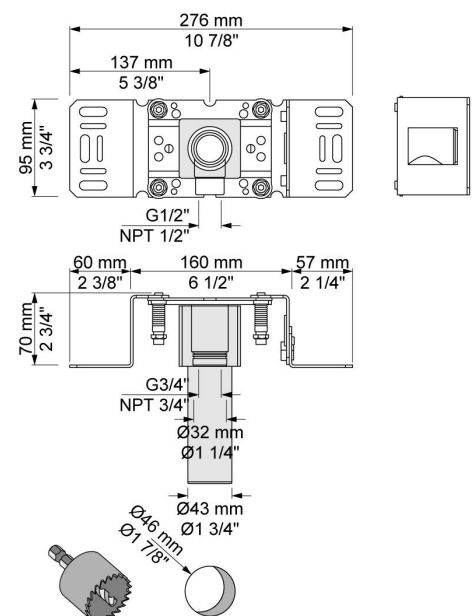
Head shower, round, ceiling-mounted. 60 mm cover flange included.

**070S**

Hand shower, hand shower holder and hose with non-return valve.

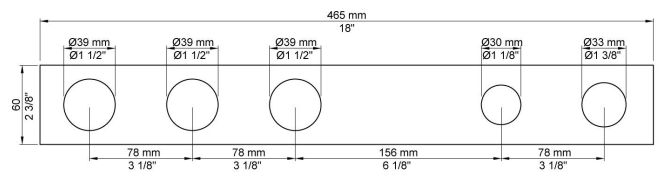
**200M**

Separate outlet socket.
1/2" connection to copper, steel, iron or pex pipe work.

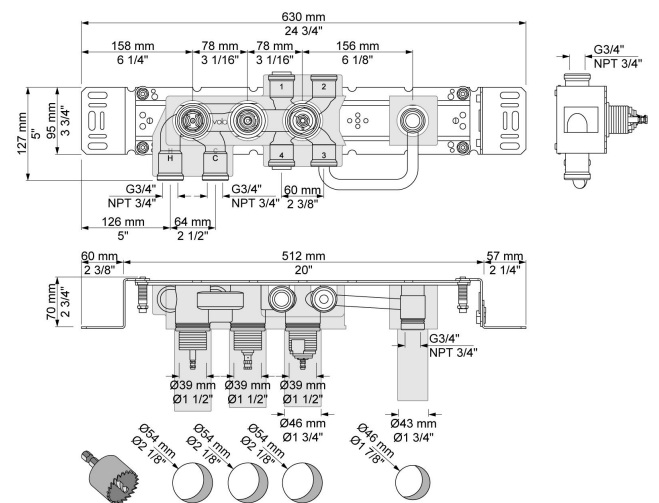


**5005L**

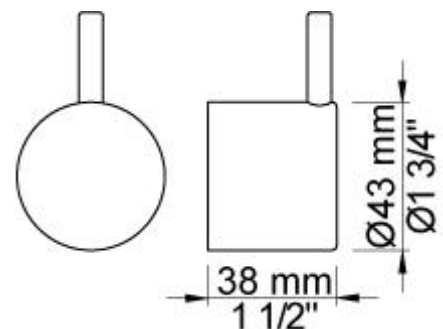
Afdekplaat, 5-gats, 60 x 465 mm, gaten Ø39, Ø39, Ø39, Ø30 en Ø33 mm. (voor 5400RV en 5400FV + T60).

**5400FV**

Thermostatic mixer with diverter and one fixed outlet socket. 3/4" connection to copper, steel, iron or pex pipe work.

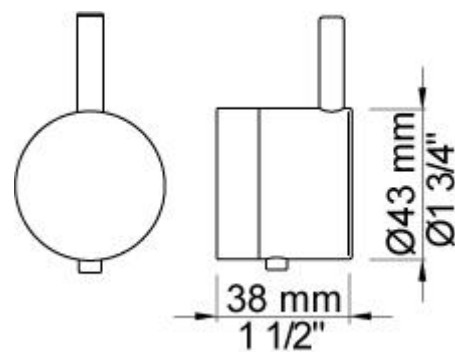
**NR51**

On/off handle for series 5000.



**NR52**

Thermostatic handle for series 5000.

**NR64G**

Diverter handle for 5400/5600. With peg in the same colour as handle (Standard).

