

	Date:
	Client:
	Project:



COMBI-5

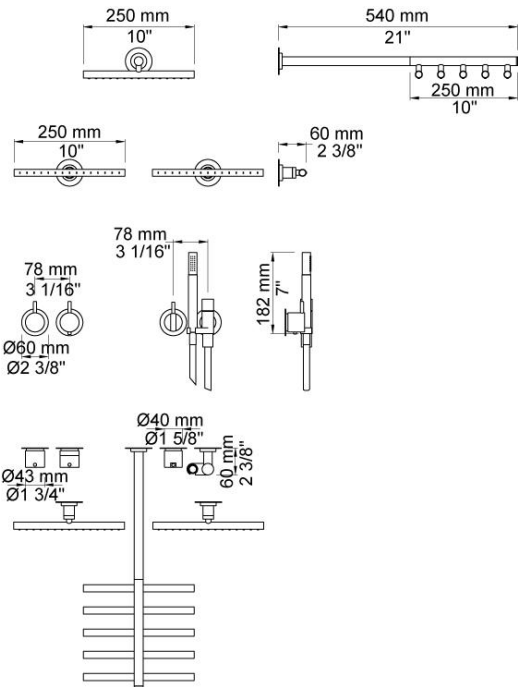
¾" thermostatic mixer. Combi-5UP = Thermostatic mixer 5200V, 3 pcs. 200M, 100. Combi-5AP = Handle NR51, handle NR52, handle NR28, hand shower and hand shower holder with non-return valve 070, hose 1500 mm, wall mounted head shower 050, 2 pcs. adjustable body jet 050K, 60 mm circular flange 3001, 2 pcs. 2001, 001.

Flow

	Bar:	1.0	2.0	3.0	4.0	5.0
050 ¹⁾	(l/min)	13.3	18.8	23.0	26.6	29.7
050K	(l/min)	2.9	4.1	5.0	5.0	5.0
070 ²⁾	(l/min)	5.2	7.3	9.0	9.0	9.0

¹⁾ USA: Flow restricted to 1.8 gpm (7.0 l/min)

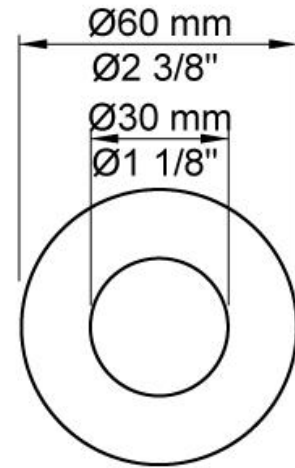
²⁾ USA: Flow restricted to 1.8 gpm (7.0 l/min)

**Available in colors**

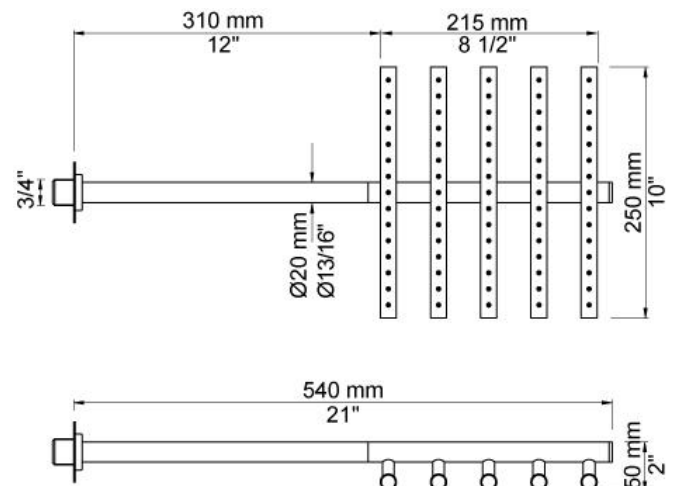
	Color 20, Brushed chrome
Color 02, Grey	Color 21, Carmine red
Color 04, Light blue	Color 25, Pink
Color 05, Orange	Color 27, Matt black
Color 06, Light green	Color 28, Matt white
Color 08, Yellow	Color 40, Brushed stainless steel
Color 09, Dark grey	Color 60, Black
Color 12, Mocca	Color 61, Brushed black
Color 14, Bright red	Color 63, Copper
Color 15, Dark blue	Color 64, Brushed Copper
Color 16, Polished chrome	Color 65, Gold
Color 17, Gloss black	Color 68, Silver
Color 18, White	Color 70, Brushed Gold
Color 19, Natural brass	

**001**

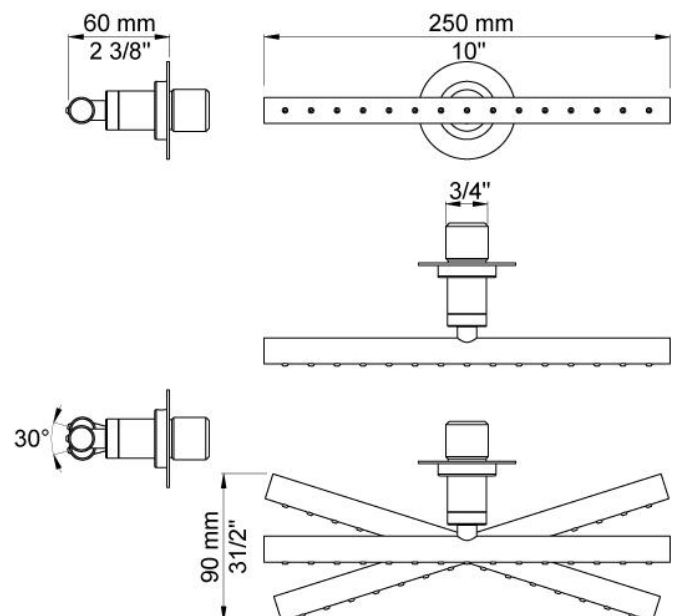
60 mm circular flange. Hole Ø30 mm.

**050**

Head shower, wall-mounted. Fits 200M in an existing installation if it is from the new generation of VOLA build-in fittings after 1995.


**050K**

Adjustable body jet.


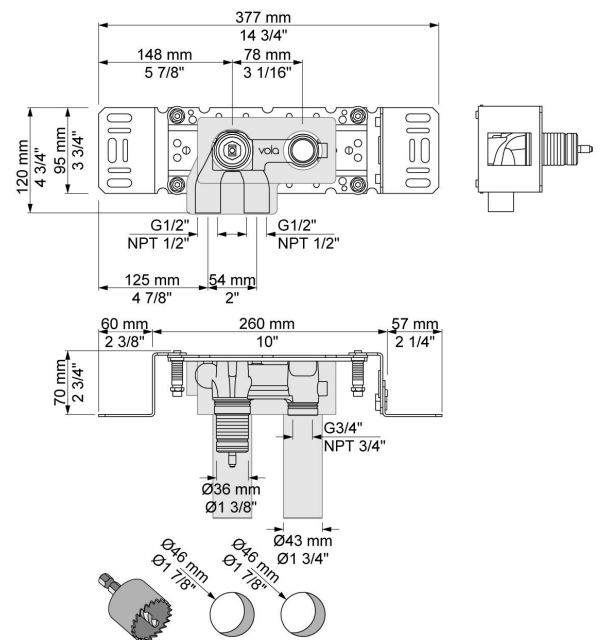


**070**

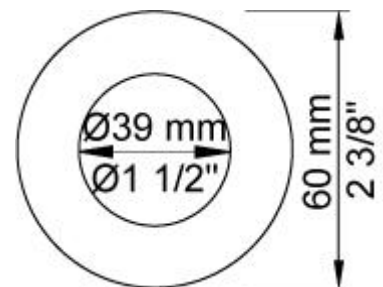
Hand shower, hand shower holder and hose with non-return valve.


**100**

One-handle build-in mixer with fixed outlet socket. 1/2" connection to copper, steel, iron or pex pipe work.

**2001**


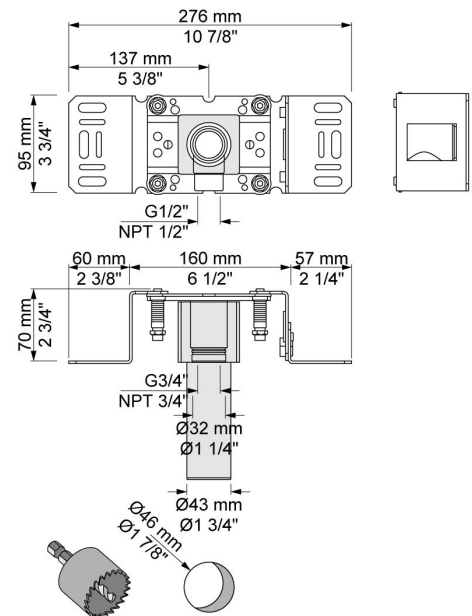
60 mm circular flange. Hole Ø39 mm.



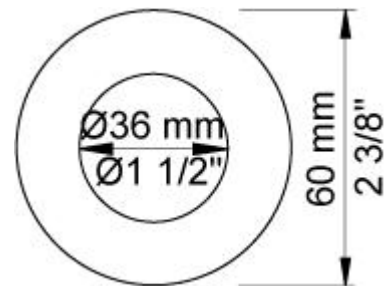
**200M**

Separate outlet socket.

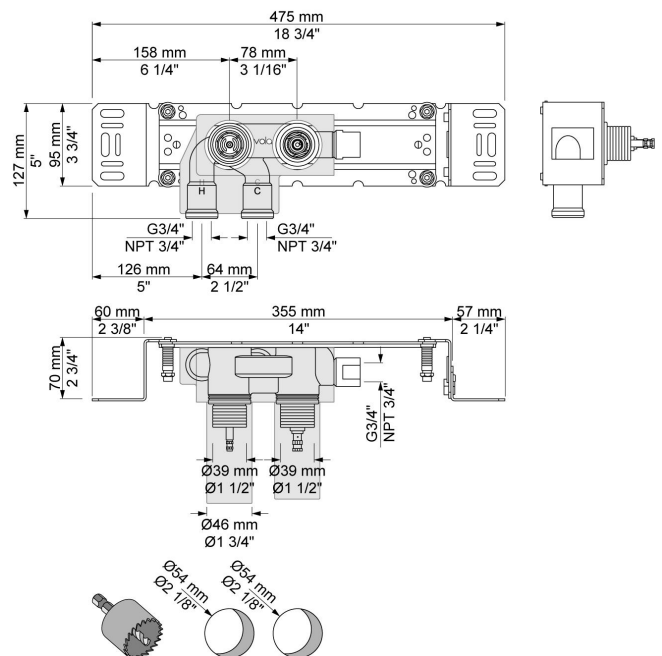
½" connection to copper, steel, iron or pex pipe work.

**3001**

60 mm circular flange. Hole Ø36 mm.


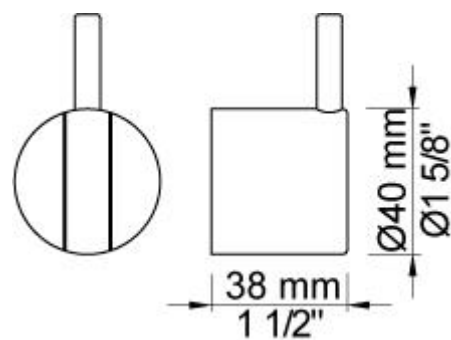
**5200V**

Thermostatic mixer without outlet socket. ¾" connection to copper, steel, iron or pex pipe work.

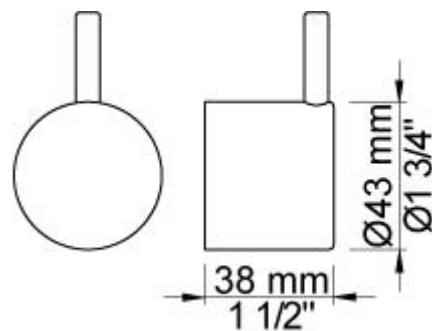


**NR28**

Operating handle for 100, 200, 300, 400 incl. variants. Ø40 mm.

**NR51**

On/off handle for series 5000.

**NR52**

Thermostatic handle for series 5000.

